

# imageRUNNER C3025i

## COLOUR A3 ALL-IN-ONE FOR BUSINESSES THAT DEMAND PRODUCTIVITY, QUALITY AND VALUE.

A colour A3 multifunctional that's easy to use and ideal for reducing the administrative costs related to printing – a complete end-to-end document workflow solution for any office.



### Assured Canon quality

The imageRUNNER C3025i is a colour A3 multifunctional offering a fast 25 pages per minute print speed and thanks to key technologies it becomes a valuable asset to any working environment all in a compact freestanding, offering. Canon's V2 (Vivid & Vibrant) imaging technology ensures documents truly stand out from the crowd and the responsive 12.7 cm (5") colour touch interface delivers a quick and easy user experience. Thanks to mobile printing and scanning capabilities including Apple AirPrint™ and Mopria printing it not only supports new ways of working but promotes it.

### Print Management made easy

Universal Login Manager (ULM) is designed to protect and optimise your device by providing simple, yet secure, user authentication options for device access control. ULM allows for print permissions to be established for users and delivers personalised workflows to drive productivity. In addition, simple reporting tools provide a powerful business insight into device and user activity and costs. Activation is required.

### Control the total cost of print

Easy device management means a reduction in administrative costs for IT teams thanks to less time and effort needed to maintain the device, with automated meter collection, consumables management and remote diagnostics. Thanks to embedded support for Canon's uniFLOW software the imageRUNNER C3025i easily integrates as part of a larger fleet, letting you track and charge individual print jobs to people, locations, departments and projects, as well as providing per-user reports.



PRINT



COPY



FAX  
Optional



SCAN

**Canon**

## Fits any office environment


The imageRUNNER C3025i's size and power make it a small but mighty document solution ideal for small workgroups within organisations of any size. Workflow integration, productivity and the option of 3-in-1 staple finishing are all available within the device's compact freestanding footprint, while adding the device to existing ecosystems is made simple with support for standards such as PCL and optional Genuine Adobe PS. Security is a priority in any modern working environment, ensure your information remains confidential with secure print, pin release and PDF password protection, plus optional uniFLOW adds further levels of security around your office eco-system.

## Energy efficient

This ENERGY STAR® qualified device offers a class-leading TEC\* rating and consumes just 1W or less in sleep mode. It is designed to be more energy efficient, reducing power consumption while in use and keeping its environmental impact to a minimum. The imageRUNNER C3025i demonstrates strong environmental credentials by also qualifying for the stringent Blue Angel award.

\* Typical Energy Consumption. Methodology defined by ENERGY STAR ([www.eu-energystar.org](http://www.eu-energystar.org))

## Configuration

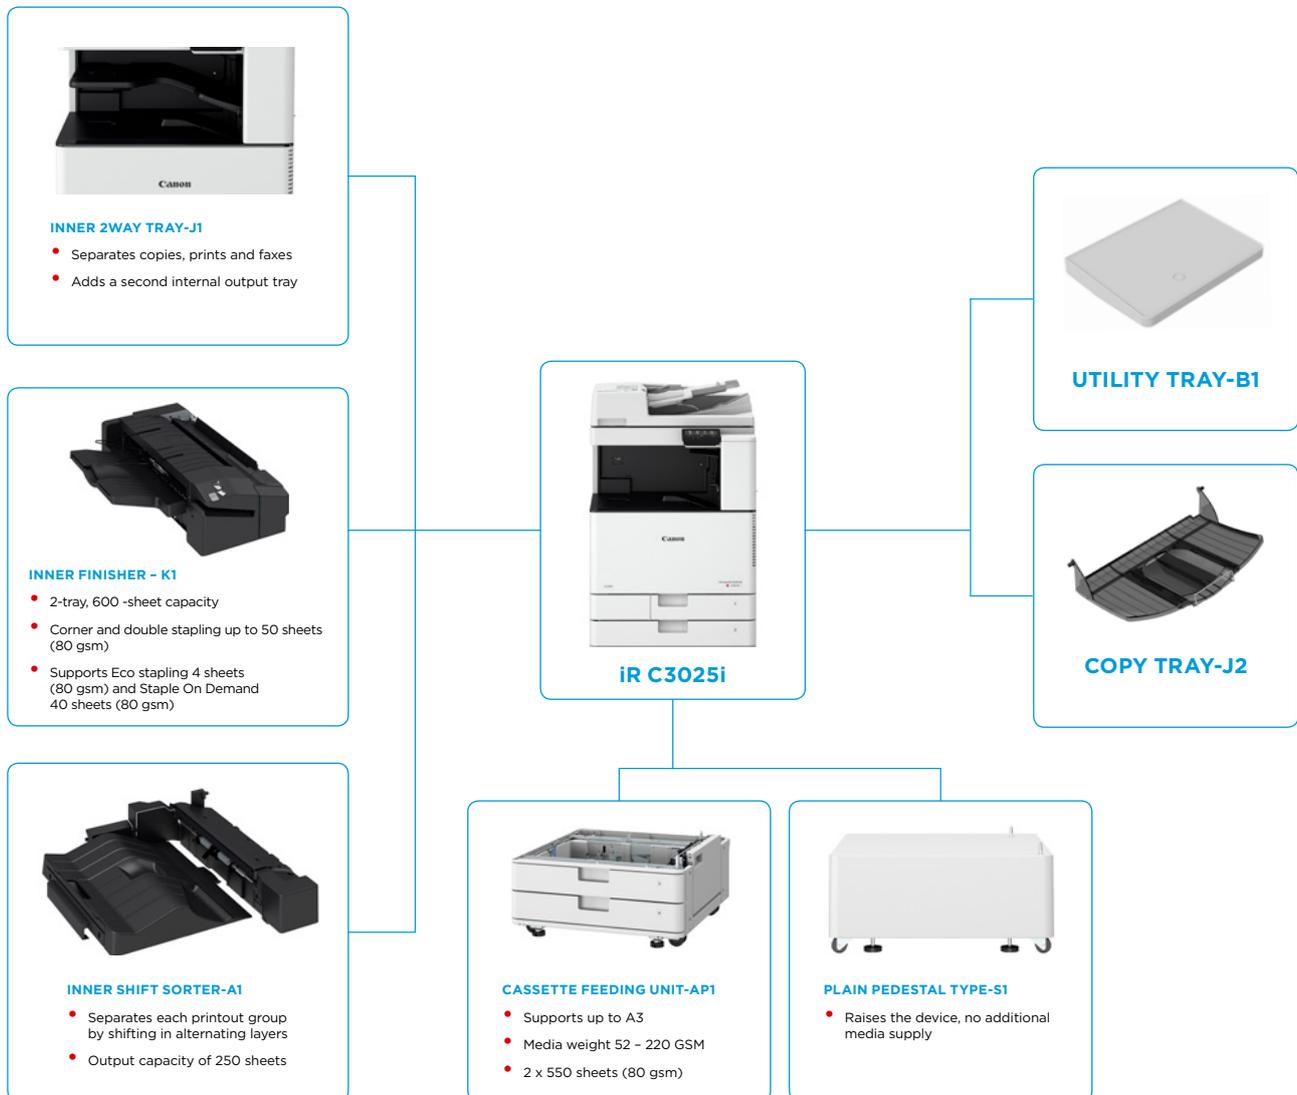

**Canon**

# TECHNICAL SPECIFICATIONS

# imageRUNNER C3025i

<b>MAIN UNIT</b>		<b>PRINT SPECIFICATIONS</b>	
<b>Machine type</b>	Colour Laser Multifunctional	<b>Printing method</b>	Colour Laser Beam Printing
<b>Core functions</b>	Print, Copy, Scan, Send and Optional Fax	<b>Print Speed (BW/CL)</b>	25 ppm (A4), 15 ppm (A3), 20 ppm (A4R), 25 ppm (A5R)
<b>Processor Speed</b>	Canon Dual Custom Processor (Shared) 800 MHz	<b>Print Resolution</b>	600dpi×600dpi, 1200dpi×1200dpi
<b>Control Panel</b>	12.7 cm (5 inch) TFT LCD WVGA Colour Touch panel	<b>Page description languages</b>	UFR II, PCL 6 (Standard), Genuine Adobe PostScript Level 3 (Optional)
<b>Memory</b>	Standard: 2.0GB RAM	<b>Double Sided Printing</b>	Automatic (Standard)
<b>Interface Connection</b>	<b>NETWORK</b> Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n); Optional: NFC	<b>Direct Print</b>	Direct printing available from USB memory key Supported file types: TIFF, JPEG, PDF and XPS* XPS is supported from LPR command print.
	<b>OTHERS</b> Standard: USB 2.0 (Host) x2, USB 2.0 (Device) x1; Optional: Copy Control Interface	<b>Printing from mobile and cloud</b>	A range of software is available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information
<b>Network Protocols</b>	TCP/IP, Frame type: Ethernet II Print applications: LPD/Raw/IPP/PPS/FTP/WSD/Mopria/GCP/AirPrint/Windows10 Mobile Print	<b>Fonts</b>	PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Barcode fonts* PS fonts: 136 Roman *Requires optional BARCODE PRINTING KIT-D1
<b>Paper Input (Standard)</b>	2 x 550-sheet cassettes (80gsm) 100-sheet multi-purpose tray (80gsm)	<b>Operating System</b>	UFR II: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10/Server 2016, MAC OS X (10.7.5 or later), Linux PCL: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10/Server 2016 PS: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10/Server 2016, MAC OS X (10.7.5 or later) PPD: MAC OS 9.1 or later, MAC OS X (10.3.9 or later), Windows Vista/Windows 7/Windows 8/Windows 10 SAP Device Types are available via the SAP Market Place. Please refer to <a href="http://www.canon-europe.com/support/businessproduct-support">http://www.canon-europe.com/support/businessproduct-support</a> for availability of print solutions for other operating systems and environments including AS/400, UNIX, Linux and Citrix. Some of these solutions are chargeable.
<b>Paper Input (Option)</b>	2 x 550-sheet cassettes (CASSETTE FEEDING UNIT-AP1)		
<b>Maximum Paper Input Capacity</b>	2,300 sheets (80 gsm)		
<b>Paper output capacity</b>	Without Finisher: 250 sheets (A4, 80 gsm) With Inner Finisher: Max. 600 sheets (A4, 80 gsm)		
<b>Finishing capabilities</b>	Collate, Group With Inner Shift Sorter: Collate, Group, Offset With Inner Finisher: Collate, Group, Offset, Staple, Staple-Free Staple, Staple on Demand		
<b>Supported media types</b>	Cassettes 1/2: Thin paper, Plain paper, Thick paper, Colour paper, Recycled paper, Pre-punched paper, Transparency, Bond paper, Envelope Multi-purpose tray: Thin paper, Plain paper, Thick paper, Colour paper, Recycled paper, Pre-punched paper, Transparency, Bond paper, Envelope, Label, Tracing paper, Coated paper Cassette 3/4 (CASSETTE FEEDING UNIT-AP1): Thin paper, Plain paper, Thick paper, Colour paper, Recycled paper, Pre-punched paper, Transparency, Bond paper		
<b>Supported media sizes</b>	Cassette 1: Standard size: A4, B5, A5R Envelopes: No.10 (COM10), ISO-C5, DL Custom Size: 139.7 mm x 182 mm to 297 mm x 215.9 mm Cassette 2: Standard size: A3, B4, A4, B5, A4R, A5R Envelopes: No.10 (COM10), Monarch, DL Custom Size: 139.7 mm x 182 mm to 304.8 x 457.2 mm Multi-purpose tray: Standard size: A3, B4, A4, A4R, B5R, B5, A5, A5R, SRA3 Custom size: 98.4 mm x 139.7 mm to 320 mm x 457.2 mm Envelopes: No.10 (COM10), Monarch, ISO-C5, DL CASSETTE FEEDING UNIT-AP1: A3, B4, A4, A4R, B5R, B5, A5R Custom Size: 139.7 mm x 182 mm to 304.8 mm x 457.2 mm	<b>COPY SPECIFICATIONS</b>	
<b>Supported media weights</b>	Cassette 1/2: 52 to 220 gsm Multi-purpose tray: 52 to 300 gsm Duplex: 52 to 220 gsm Cassette Feeding Unit-AP1: 52 to 220 gsm	<b>Copy Speed (BW/CL)</b>	25 ppm (A4), 15 ppm (A3), 20 ppm (A4R), 25 ppm (A5R)
<b>Warm-up Time</b>	From Power On: 30 Seconds or Less <sup>1</sup> From Sleep Mode: 10 Seconds or Less	<b>First-Copy-Out Time (BW/CL)</b>	Approx. 5.9/8.2 seconds or less
<b>Dimensions (H x W x D)</b>	880 mm x 565 mm x 664 mm	<b>Copy resolution</b>	Reading: 600 dpi x 600 dpi Printing: 600 dpi x 600 dpi
<b>Installation Space (W x D)</b>	978 mm x 1,117 mm (Basic: RADF + Multi-purpose tray extension extended + Cassette open) 1,110 mm x 1,117 mm (Fully Configured: RADF +INNER FINISHER-K1 + Multi-purpose tray extension extended + Cassette open)	<b>Multiple Copies</b>	Up to 999 copies
<b>Weight</b>	Approx. 67.6 kg including toner	<b>Copy Exposure</b>	Automatic or Manual (6 Levels)
		<b>Magnification</b>	25% - 400% (1% Increments)
		<b>Preset Reductions</b>	25%, 50%, 71%, 100%
		<b>Preset Enlargements</b>	141%, 200%, 400%
		<b>SCAN SPECIFICATIONS</b>	
		<b>Standard type</b>	Reader and Duplexing Automatic Document Feeder
		<b>Supported media size/s</b>	A3, B4, A4, A4R, B5, B5R, A5, A5R, B6
		<b>Pull Scan Specifications</b>	Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows Vista/7/8/8.1/10
		<b>Scan Resolution</b>	204 x 196 dpi, 300 x 300 dpi
		<b>Acceptable Originals/weights</b>	Platen media size: Sheet, Book, 3-Dimensional Objects (Up to 2kg) Document feeder Media size : A3, B4, A4R, A4, B5R, B5, A5R, A5, B6 Document Feeder media weight: 1-sided scanning: 38 to 128 gsm/64 to 128 gsm (BW/CL) 2-sided scanning: 50 to 128 gsm/64 to 128 gsm (BW/CL)
		<b>Scan Method</b>	Send functionality available on all models Scan to USB Memory Key: Available on all models TWAIN/WIA Pull scanning available on all models
		<b>Scan Speed (BW/CL; A4)</b>	Single-sided Scanning (BW): 55 ipm (300pi) / 30 ipm (600 dpi) Single-sided Scanning (Colour): 55 ipm (300pi) / 30 ipm (600 dpi) Double-sided Scanning (BW): 27.5 ipm (300pi) / 15 ipm (600 dpi) Double-sided Scanning (Colour): 27.5 ipm (300pi) / 15 ipm (600 dpi)
		<b>Paper Capacity</b>	100 Sheets (80 gsm)
		<b>Double sided scanning</b>	2-sided to 2-sided (Automatic)

# TECHNICAL SPECIFICATIONS

# imageRUNNER C3025i

## SEND SPECIFICATIONS

<b>Optional/ standard</b>	Standard
<b>Destination</b>	E-mail/Internet FAX (SMTP), SMB, FTP, Super G3 FAX(Optional)
<b>Colour Mode</b>	Auto Colour Select (Full Colour, Grayscale), Auto Colour Select (Full Colour/ Black-and-White) Full Colour, Grayscale, and Black-and-White
<b>Address Book/Speed dials</b>	LDAP (50)/Local (300)/Speed dial (281)
<b>Send resolution</b>	204 x 196 dpi, 300 x 300 dpi
<b>Communication protocol</b>	File: FTP, SMB v3.0 E-mail/I-Fax: SMTP, POP3, I-Fax (Simple)
<b>File Format</b>	Standard: TIFF, JPEG, PDF(Compact, Searchable) Optional: PDF(Encrypted, Digital Signature)

## FAX SPECIFICATIONS

<b>Optional/ standard</b>	Optional
<b>Maximum Number of Connection Lines</b>	1
<b>Modem Speed</b>	Super G3: 33.6 kbps G3: 14.4 kbps
<b>Compression Method</b>	MH, MR, MMR, JBIG
<b>Resolution</b>	400 x 400 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi
<b>Sending/Recording Size</b>	A5* and A5R* to A3 *Sent as A4
<b>FAX memory</b>	Up to 512 pages
<b>Speed dials</b>	Max. 281
<b>Group dials/destinations</b>	Max. 299 dials
<b>Sequential broadcast</b>	Max. 310 addresses
<b>Memory backup</b>	Yes

## SECURITY SPECIFICATIONS

<b>Authentication</b>	<u>Standard:</u> Department ID Authentication, Universal Login Manager
<b>Network</b>	<u>Standard:</u> IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP
<b>Document</b>	<u>Standard:</u> Secure Print <u>Optional:</u> Encrypted PDF, Device signatures

## ENVIRONMENTAL SPECIFICATIONS

<b>Operating Environment</b>	Temperature: 10 to 30 °C (50 to 86 °F) Humidity: 20 to 80 % RH (no condensation)
<b>Power source</b>	220-240 V (±10 %), 50/60 Hz (±2 Hz), 4.0 Amp
<b>Power consumption</b>	Maximum: Approx. 1.5 kW Printing: Approx. 407.8 Wh or less <sup>2</sup> Standby: Approx. 33.6 Wh Sleep mode: Approx. 2 W Plugin Off: Approx. 0.1 W <sup>2</sup> Typical Electricity Consumption (TEC) rating <sup>3</sup> : 0.9 kWh
<b>Noise levels (BW/CL)</b>	Lot 26 ( <a href="http://www.canon-europe.com/For_Work/Lot26/index.aspx">http://www.canon-europe.com/For_Work/Lot26/index.aspx</a> ) Sound Power Level (LwAd) <sup>4</sup> Active(BW): 64 dB or Less <sup>2</sup> , Active(CL): 63.9 dB or Less <sup>2</sup> , Standby: No noise <sup>5</sup> Sound Pressure (LpAm) <sup>3</sup> Bystander's position: Active(BW): 47 dB or Less, Active(CL): 48dB or Less, Standby: 4.7db <sup>5</sup>
<b>Standards</b>	ENERGY STAR® Qualified Ecomark Green purchase Blue Angel
<b>Consumables</b>	
<b>Toner Cartridge/s</b>	C-EXV 54 TONER BK/C/M/Y
<b>Toner (Estimated Yield @ 5% Coverage)</b>	C-EXV 54 TONER BK: 15,500 pages C-EXV 54 TONER C/M/Y: 8,500 pages
<b>Hardware Accessories</b>	
	For full information on options available for the iR C3025i, please refer to the specification tables on your local Canon web page

## Footnotes

- <sup>[1]</sup> Time from device power-on until 1st print output completes, minus FCOT
- <sup>[2]</sup> Data taken from Blue Angel Certification User Information
- <sup>[3]</sup> Typical Electricity Consumption (TEC) rating represents the typical electricity consumed by a product during 1 week, measured in kilowatt-hours (kWh). The test methodology is defined by Energy Star (<http://www.eu-energystar.org>).
- <sup>[4]</sup> Declared noise emission in accordance with ISO 7779
- <sup>[5]</sup> Data taken from ECO declaration

## Software and Solutions



## Certifications and compatibility



Canon Inc.  
canon.com  
Canon Europe  
canon-europe.com  
English edition  
© Canon Europa N.V., 2017

**COLOUR A3 ALL-IN-ONE FOR  
BUSINESSES THAT DEMAND  
PRODUCTIVITY, QUALITY AND VALUE.**

**imageRUNNER C3025i**

A colour A3 multifunctional that's easy to use and ideal for reducing the administrative costs related to printing – a complete end-to-end document workflow solution for any office.



Sales Start Date: June 2017

**PRODUCT DETAILS:**

PRODUCT NAME	MERCURY CODE	EAN CODE
imageRUNNER C3025i MFP	1567C007AA	4549292087819

**OPTIONAL ACCESSORIES:**

PRODUCT NAME	MERCURY CODE	EAN CODE
<b>Document Feeder/Reader Option</b>		
ADF Access Handle-A1	1095B001AA	4960999354736
<b>Network Option</b>		
PS Printer Kit-BK1@E	1635C005AA	N/A
Barcode Printing Kit-D1@E	3999B005AA	N/A
Send PDF Security Feature Set-E1@E	9594B002AA	N/A
NFC Kit-D1	1617C001AA	4549292087970
<b>Send/FAX</b>		
Super G3 FAX Board-AV1	1633C002AA	4549292088182
<b>Paper Supply Option</b>		
Cassette Feeding Unit-AP1	1537C002AA	4549292079562
Canon FL Cassette-BE1	1538C001AA	4549292079654
Canon FL Cassette-BF1	1539C001AA	4549292079678
Plain Pedestal Type-S1	2291C001AA	8714574646879
<b>Output Option</b>		
Inner Finisher-K1	1553C001AA	4549292079739
Copy Tray-J2	8815A003AA	4549292031577
Inner 2way Tray-J1	9611B001AA	4549292031867
Inner Shift Sorter-A1	1542C001AA	4549292079722
Staple-P1	1008B001AB	4960999351100
3 Way Unit-D1	8952B001AA	4549292031898



**COLOUR A3 ALL-IN-ONE FOR  
BUSINESSES THAT DEMAND  
PRODUCTIVITY, QUALITY AND VALUE.**

**imageRUNNER C3025i**

A colour A3 multifunctional that's easy to use and ideal for reducing the administrative costs related to printing – a complete end-to-end document workflow solution for any office.



**OPTIONAL ACCESSORIES:**

PRODUCT NAME	MERCURY CODE	EAN CODE
<b>Other Option</b>		
Copy Card Reader-F1	4784B001AA	4960999679686
Copy Card Reader Attachment-H2	9897B002AA	4549292087963
IC Card Reader Attachment-B1	1708C001AA	4549292088274
Copy Control Interface Kit-D1	1640C001AA	4549292088281
Cassette Heater Unit-41	8955B001BA	4549292032192
Utility Tray-B1	0165C001AA	4549292026870
Media Adjustment kit-A1	1148C001AA	4549292059779
<b>DCS- Device Centric Software</b>		
MiCard PLUS for ULM	8418B001AA	8714574592169
UFMifare10CardPack	8418B002AA	8714574592176
UFHID10 CardPack	8418B003AA	8714574592183
<b>Consumables</b>		
C-EXV 54 Toner Black	1394C002AA	4549292080452
C-EXV 54 Toner Cyan	1395C002AA	4549292080445
C-EXV 54 Toner Magenta	1396C002AA	4549292080438
C-EXV 54 Toner Yellow	1397C002AA	4549292080421