

# imageRUNNER ADVANCE 4500 II series

## TRUSTED MULTIFUNCTIONAL, WITH VERSATILE END-TO-END DOCUMENT CAPABILITIES



### QUICK FACTS

- **Format:** Mono A3
- **Maximum number of Paper Cassettes:** 5
- **Paper input Capacity:** 6,330 sheets
- **Finishing Capabilities:** Collate, Group, Offset, Staple, Booklet, Hole Punch, Staple-Free Staple, Staple on Demand
- **ADF Capacity:** 150 sheets
- **ADF Type:** Platen and DADF or Platen and RADF
- **A4 B/W Print Speed Range:** 20 - 30ppm
- **Scan Speed:** 80ipm
- **Print Languages:** UFR II, PCL6
- **Optional:** Adobe PostScript 3
- **Print Resolution:** 1,200 x 1,200

- Suitable for workgroups in a floor standing environment
- Class leading Typical Electricity Consumption (TEC) ratings
- Consumes as little as 0.6W in sleep mode
- Qualifies for the latest stringent Blue Angel certification
- Fusing technologies, QF toner, and innovative sleep mode features help lower overall energy consumption.
- Users can create professional-looking booklets and finished documents automatically.
- Save on transmission costs by utilising the Fax over IP option
- Optional Cassette Lock to protect your investment
- Options for cost recovery and coin vending integration.

## UNIFIED FIRMWARE PLATFORM

Common Firmware and features that apply to all imageRUNNER ADVANCE Generation 3 2nd Edition models

### SECURITY:

- Prevent unauthorised distribution of sensitive information with our most secure imageRUNNER ADVANCE ever through an array of standard and optional document security features
- Choose from device based or Cloud based authentication without the need for an additional server
- Ability to disable functions by user to prevent unauthorised usage
- Secure Print and Mailbox enhance document confidentiality
- Ensure information privacy and security across your network with IPsec, port filtering capabilities, and SSL technology
- Mitigate the risk associated with the governance of sensitive information and data privacy (PII data) with the Industry-first Data Loss Prevention and auditing of prints, copies, scans and faxes through uniFLOW

### PRODUCTIVITY:

- Advanced personalisation enables a unique, personal experience tailored to meet each user's workflow needs.
- Intuitive user interface with a large, responsive colour touchscreen with smart phone-like usability
- Motion sensor technology wakes device from sleep mode.
- Convenient Staple-on-demand functionality.
- Automatically remove blank pages when scanning.
- Scan and convert documents to Searchable PDF, Microsoft® Word, and Microsoft® PowerPoint
- Effortless capturing of paper-based documents with rapid single pass scanning (DADF) and smart media handling capabilities such as multi-sheet feed detection, help speed up the process of digitising documents.
- Secure mobile printing as standard
- Enable guest printing with Direct Connection
- Substitute your PC for your smart device to complete your day-to-day workflows
- Support for industry standards such as Apple Airprint® and Mopria®

**Canon**

# imageRUNNER ADVANCE 4500 II series

## INTEGRATION:

- Tight integration with uniFLOW Online Express, a Cloud based output management system
- uniFLOW Online Express provides extensive tracking and reporting capabilities from a central web based system.
- Collaborates with business applications and external systems in the cloud
- Canon's MEAP platform provides process optimisation, by integrating with a range of powerful document, capture and output management solutions such as uniFLOW
- Canon's device management tools give you a centralised point of control across your entire fleet, upgrade devices, check device status and consumables, turn off devices remotely, capture meter readings, as well as manage address books and printer drivers
- Supports industry and network standards i.e. PCL and Adobe PostScript for seamless integration

## COST MANAGEMENT:

- Technology designed to reduce total cost of print
- User activity tracking provides visibility of print behaviour
- Apply policies and restrict usage at function level by user\*

- Remote diagnostics and assistance, help reduce costs by minimising downtime and time spent by IT resolving issues
- Remote and centralised fleet management simplifies IT management of devices and fleets

## QUALITY AND RELIABILITY:


- Designed to achieve maximum uptime with intuitive user maintenance videos and status notifications, to help keep supplies replenished.
- Canon's signature reliability and engine technologies provide high quality output to meet the needs of busy departments.
- Quiet finishing provides less interruptions to workers, keeping employees productive

## SUSTAINABILITY:

- Incorporates sustainable design and a focus on minimising environmental impact
- ENERGY STAR® qualified
- Minimise waste with default 2-sided printing, secure printing, and the ability to hold print jobs, preview them and change print settings at the device, achieving the desired results at the first time of printing

## imageRUNNER ADVANCE C4500 Cloud Ready Series

### Main configuration options

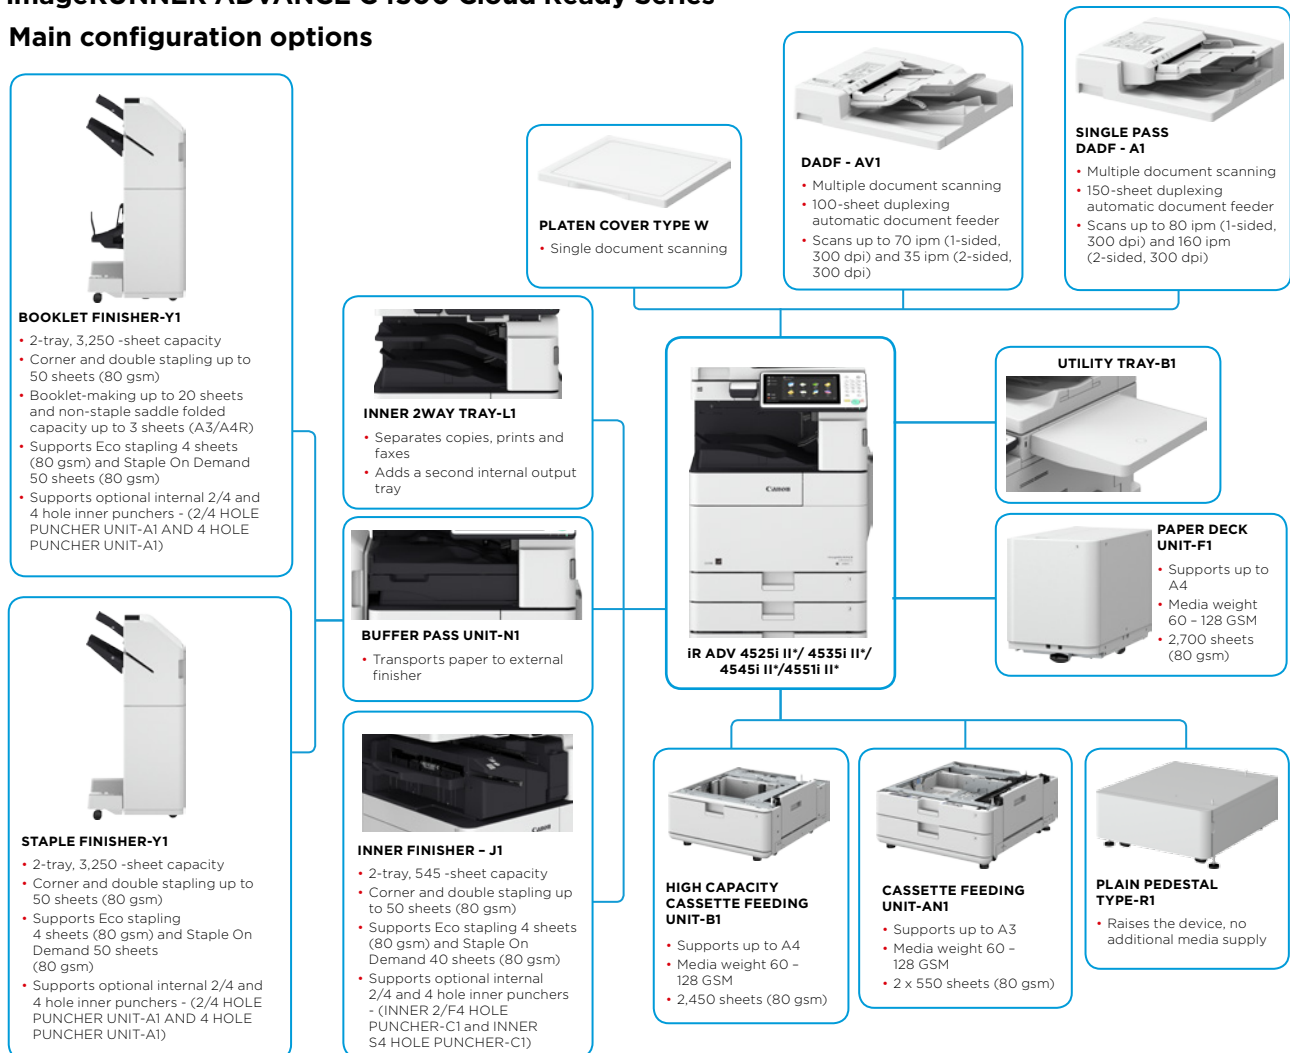

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the online product configurator.

II\* indicates that this model has been upgraded to new system software and includes additional security features as standard.

# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE 4500 II series

<b>MAIN UNIT</b>	Monochrome Laser Multifunctional Print, Copy, Scan, Send, Store and Optional Fax Canon Dual Custom Processor (Shared) 1.75 Ghz 25.6 cm (10.1 inch) TFT LCD WSVGA Colour Touch panel Standard: 3.0GB RAM Standard: 250 GB Maximum: 1 TB Optional: 250GB, 1 TB	<b>Weight</b>	Platen model: Approx. 74.3 kg including toner RADF model: Approx. 80.7 kg including toner DADF model: Approx. 86 kg including toner
<b>Machine type</b>		<b>PRINT SPECIFICATIONS</b>	Monochrome Laser Beam Printing
<b>Core functions</b>		<b>Printing method</b>	<b>IR-ADV 4525i II*:</b> 25 ppm (A4), 15 ppm (A3), 17 ppm (A4R), 14 ppm (A5R)
<b>Processor Speed</b>		<b>Print Speed</b>	<b>IR-ADV 4535i II*:</b> 35 ppm (A4), 22 ppm (A3), 32 ppm (A4R), 18 ppm (A5R)
<b>Control Panel</b>			<b>IR-ADV 4545i II*:</b> 45 ppm (A4), 22 ppm (A3), 32 ppm (A4R), 18 ppm (A5R)
<b>Memory</b>			<b>IR-ADV 4551i II*:</b> 51 ppm (A4), 25 ppm (A3), 37 ppm (A4R), 18 ppm (A5R)
<b>Hard Disk drive</b>			1,200 dpi x 1,200 dpi UFR II, PCL 6 (Standard) Genuine Adobe PostScript Level 3 (Option) Automatic (Standard)
<b>Mirroring Hard Disk Drive</b>		<b>Print Resolution</b>	Direct printing available from USB memory key, Advanced space, Remote UI and Web Browser <sup>†</sup> Supported file types: TIFF, JPEG, PDF, EPS, and XPS.
<b>Interface Connection</b>	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n) Optional: NFC, Bluetooth Low Energy	<b>Page description languages</b>	A range of software and MEAP-based solutions is available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information
	OTHERS Standard: USB 2.0 (Host) x2, USB 3.0 (Host) x1, USB 2.0 (Device) x1 Optional: Serial Interface, Copy Control Interface	<b>Double Sided Printing</b>	PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T* (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts** *Requires optional PCL INTERNATIONAL FONT SET-A1 **Requires optional BARCODE PRINTING KIT-D1
<b>Paper input (Standard)</b>	2 x 550-sheet cassettes (80gsm) 85-sheet multi-purpose tray (80gsm)	<b>Direct Print</b>	PS fonts: 136 Roman UFR II: Windows Vista/Server 2008/7/Server 2008 R2/Server 2012/8.1/Server 2012 R2/10/Server 2016, MAC OS X (10.7 or later) PCL: Windows Vista/Server 2008/7/Server 2008 R2/Server 2012/8.1/Server 2012 R2/10/Server 2016 PS: Windows Vista/Server 2008/7/Server 2008 R2/Server 2012/8.1/Server 2012 R2/10/Server 2016, MAC OS X (10.7 or later) PPD: Windows Vista/7/8.1/10, MAC OS X (10.3.9 or later)
<b>Paper input (Option)</b>	2 x 550-sheet cassettes (80gsm) (CASSETTE FEEDING UNIT-AN1) 2,450-sheet cassette (80gsm) (HIGH CAPACITY CASSETTE FEEDING UNIT-B1) Additional 2,700 sheets (80gsm) (PAPER DECK UNIT-F1) 6,335 sheets (80 gsm)	<b>Printing from mobile and cloud</b>	SAP Device Types are available via the SAP Market Place. Please refer to <a href="http://software.canon-europe.com/">http://software.canon-europe.com/</a> for availability of print solutions for other operating systems and environments including AS/400, UNIX, Linux and Citrix. Some of these solutions are chargeable.
<b>Maximum paper input capacity</b>	Without Finisher: 250 Sheets (A4, 80 gsm) With Inner Finisher: Max. 545 sheets (A4, 80 gsm) With External Finisher: Max. 3,250 sheets (A4, 80 gsm)	<b>Funts</b>	
<b>Paper output capacity</b>	Collate, Group With Inner Finisher: Collate, Group, Offset, Staple, Hole Punch <sup>1</sup> , Staple-Free Staple, Staple On Demand With External Finisher: Collate, Group, Offset, Staple, Booklet <sup>2</sup> , Hole Punch <sup>1</sup> , Staple-Free Staple, Staple On Demand	<b>Operating System</b>	
<b>Finishing capabilities</b>	Cassettes 1/2: Thin paper, Plain paper, Recycled paper, Colour paper, Pre-punched paper, Thick paper, Envelopes* *Envelope support via second drawer only. (Requires optional ENVELOPE FEEDER ATTACHMENT-D1)		
<b>Supported media types</b>	Multi-purpose tray: Thin paper, Plain paper, Recycled paper, Colour paper, Pre-punched paper, Thick paper, Bond paper, Transparency, Labels, Tracing paper, Envelope Cassettes 3/4 (CASSETTE FEEDING UNIT-AN1): Thin paper, Plain paper, Recycled paper, Colour paper, Pre-punched paper, Thick paper HIGH CAPACITY CASSETTE FEEDING UNIT-B1: Thin paper, Plain paper, Recycled paper, Colour paper, Pre-punched paper, Thick paper		
	PAPER DECK UNIT-F1: Thin paper, Plain paper, Recycled paper, Colour paper, Pre-punched paper, Thick paper	<b>COPY SPECIFICATIONS</b>	
<b>Supported media sizes</b>	Cassette 1: Standard size: A4, A4R, B4, B5, B5R, A5R Custom size: Min. 139.7 mm x 182 mm up to 297 mm x 390 mm Cassette 2: Standard size: A3, B4, A4, A4R, B5, B5R, A5R, Envelopes* (No.10 (COM10), Monarch, ISO-C5, DL) *Envelope support via second drawer only. (Requires optional ENVELOPE FEEDER ATTACHMENT-D1) Custom size: Min. 139.7 mm x 182 mm up to 297 mm x 431.8 mm Multi-purpose tray: Standard size: A4, A4R, A3, B4, B5, B5R, A5, A5R, Envelopes (No. 10 (COM 10), Monarch, ISO-C5, DL) Free Size: Min. 98 mm x 148 mm up to 297 mm x 431.8 mm CASSETTE FEEDING UNIT-AN1: A4, A4R, A3, B4, B5, B5R, A5R, Custom Size (Min. 139.7 mm x 182 up to 297 mm x 431.8 mm) HIGH CAPACITY CASSETTE FEEDING UNIT-B1: A4 PAPER DECK UNIT-F1: A4, B5 Cassettes: 60 to 128 gsm Multi-purpose tray: 52 to 220 gsm Duplex: 60 to 105 gsm Paper Deck: 60 to 128 gsm HIGH CAPACITY CASSETTE FEEDING UNIT-B1: 60 to 128 gsm	<b>Copy Speed</b>	<b>IR-ADV 4525i II*:</b> 25 ppm (A4), 15 ppm (A3), 17 ppm (A4R), 14 ppm (A5R)
		<b>First-Copy-Out Time (BW/CL)</b>	<b>IR-ADV 4535i II*:</b> 35 ppm (A4), 22 ppm (A3), 32 ppm (A4R), 18 ppm (A5R)
<b>Supported media weights</b>		<b>Copy resolution</b>	<b>IR-ADV 4545i II*:</b> 45 ppm (A4), 22 ppm (A3), 32 ppm (A4R), 18 ppm (A5R)
		<b>Multiple Copies</b>	<b>IR-ADV 4551i II*:</b> 51 ppm (A4), 25 ppm (A3), 37 ppm (A4R), 18 ppm (A5R)
<b>Warm-up Time</b>	From Power On: 24 Seconds or Less <sup>3</sup> From Sleep Mode: 10 Seconds or Less <sup>3</sup> Quick Start-up Mode: 4 seconds or less <sup>3</sup>	<b>Copy Exposure</b>	IR-ADV 4525i II*: Approx. 5.2 seconds or less IR-ADV 4535i II*/4545i II*: Approx. 3.8 seconds or less IR-ADV 4551i II*: Approx. 3.7 seconds or less
<b>Dimensions (W x D x H)</b>	Platen model: 587 mm x 740 mm x 823 mm RADF model: 587 mm x 750 mm x 926 mm DADF model: 587 mm x 740 mm x 945 mm	<b>Magnification</b>	Reading: 600 dpi x 600 dpi Printing: Up to 1,200 dpi x 1,200 dpi Up to 999 copies Automatic or Manual (9 levels)
<b>Installation Space(W x D)</b>	889 mm x 1,171.9 mm (Basic: Platen + Multi-purpose tray open) 889 mm x 1,181.9 mm (Basic: RADF + Multi-purpose tray open) 889 mm x 1,171.9 mm (Basic: DADF + Multi-purpose tray open) 1,811 mm x 1,269.9 mm (Fully configured: Platen + PAPER DECK UNIT-F1 + BOOKLET FINISHER-Y1) 1,811 mm x 1,279.9 mm (Fully configured: RADF + PAPER DECK UNIT-F1 + BOOKLET FINISHER-Y1) 1,811 mm x 1,269.9 mm (Fully configured: DADF + PAPER DECK UNIT-F1 + BOOKLET FINISHER-Y1)	<b>Preset Reductions</b>	25%, 50%, 71%, 100%
		<b>Preset Enlargements</b>	141%, 200%, 400%
		<b>SCAN SPECIFICATIONS</b>	
		<b>Standard type</b>	Standard: Reader Optional: Colour platen or Duplexing Automatic Document Feeder (RADF) or Single-pass Duplexing Automatic Document Feeder (DADF)
		<b>Pull Scan Spec</b>	Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows Vista/7/8.1/10/Server 2008/2008 R2/2012/2012 R2/2016
		<b>Scan Resolution</b>	100 x 100 dpi, 150 x 150 dpi, 200 x 100 dpi, 200 x 200 dpi, 200 x 400 dpi, 300 x 300 dpi, 400 x 400 dpi, 600 x 600 dpi
		<b>Acceptable Originals</b>	Platen media size: Sheet, Book, 3-Dimensional Objects (Up to 2kg) Platen: A3, B4, A4, A4R, B5, B5R, A5, A5R Document Feeder media size: RADF model: A3, B4, A4, A4R, B5, B5R, A5, A5R, B6 DADF model: A3, B4, A4, A4R, B5, B5R, A5, A5R, B6R Document Feeder media weight: RADF model: 1-sided scanning: 38 to 128 gsm/64 to 128 gsm (BW/CL) 2-sided scanning: 50 to 128 gsm/64 to 128 gsm (BW/CL) DADF model: 1-sided scanning: 38 to 157 gsm/64 to 157 gsm (BW/CL) 2-sided scanning: 50 to 157 gsm/64 to 157 gsm (BW/CL)

# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE 4500 II series

<b>Scan Method</b>	Send functionality available on all models Scan to USB Memory Key: Available on all models Scan to Mobiles or internet-connected devices: A range of solutions is available to provide scanning to mobile devices or internet-connected devices depending on your requirements. Please contact your sales representative for further information. Scan to cloud-based services: A range of solutions is available to provide scanning to cloud-based services depending on your requirements. Please contact your sales representative for further information.	<b>Network</b>	Standard: IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME
<b>Scan Speed (BW/CL; A4)</b>	TWAIN/WIA Pull scanning available on all models RADF model: Single-sided Scanning (BW): 70 ipm (300 dpi) / 51 ipm (600 dpi) Single-sided Scanning (Colour): 70 ipm (300 dpi) / 51 ipm (600 dpi) Double-sided Scanning (BW): 35 ipm (300 dpi) / 25.5 ipm (600 dpi) Double-sided Scanning (Colour): 35 ipm (300 dpi) / 25.5 ipm (600 dpi) DADF model: Single-sided Scanning (BW): 80 ipm (300 dpi) / 80 ipm (600 dpi) Single-sided Scanning (Colour): 80 ipm (300 dpi) / 60 ipm (600 dpi) Double-sided Scanning (BW): 160 ipm (300 dpi) / 150 ipm (600 dpi) Double-sided Scanning (Colour): 160 ipm (300 dpi) / 80 ipm (600 dpi)	<b>Document</b>	Standard: Secure Print, Adobe LiveCycle® Rights Management ES2.5 Integration, Encrypted PDF, Encrypted Secure Print, Device signature, Secure Watermarks Optional: User signature, Document Scan Locking
<b>Paper Capacity</b>	RADF model: 100 Sheets (80 gsm) DADF model: 150 Sheets (80 gsm)	<b>ENVIRONMENTAL SPECIFICATIONS</b>	
<b>Double sided scanning</b>	2-sided to 2-sided (Automatic)	<b>Operating Environment</b>	Temperature: 10 to 30 °C (50 to 86 °F) Humidity: 20 to 80 % RH (no condensation) iR-ADV 4525i II*: 220-240 V (±10 %), 50/60 Hz (±2 Hz), 4.3 Amp iR-ADV 4535i II*/4545i II*: 220-240 V (±10 %), 50/60 Hz (±2 Hz), 5.2 Amp iR-ADV 4551i II*: 220-240 V (±10 %), 50/60 Hz (±2 Hz), 5.6 Amp
<b>SEND SPECIFICATIONS</b>	Standard on all models	<b>Power source</b>	Printing: iR-ADV 4525i II*: Approx. 657 Wh or less <sup>5</sup> iR-ADV 4535i II*: Approx. 761 Wh or less <sup>5</sup> iR-ADV 4545i II*: Approx. 845 Wh or less <sup>5</sup> iR-ADV 4551i II*: Approx. 912 Wh or less <sup>5</sup> Standby: Approx. 37 Wh Sleep mode: Approx. 0.6 W <sup>6</sup> Plugin Off: Approx. 0.2W <sup>5</sup> Typical Electricity Consumption (TEC) rating <sup>7</sup> : 1.1 kWh (iR-ADV 4525i II*) 1.8 kWh (iR-ADV 4535i II*) 2.3 kWh (iR-ADV 4545i II*) 2.6 kWh (iR-ADV 4551i II*)
<b>Optional / Standard Destination</b>	E-mail/Internet FAX (SMTP), SMB, FTP, WebDAV, Mail Box, Super G3 FAX(Optional), IP Fax(Optional)	<b>Power consumption</b>	Sound Power Level (LwAd) <sup>8</sup> iR-ADV 4525i II*: Active (BW): 65.4 dB or Less <sup>9</sup> , Standby: 36.1 dB or Less <sup>9</sup> iR-ADV 4535i II*: Active (BW): 65.5 dB or Less <sup>9</sup> , Standby: 36.1 dB or Less <sup>9</sup> iR-ADV 4545i II*: Active (BW): 67.3 dB or Less <sup>9</sup> , Standby: 37.2 dB or Less <sup>9</sup> iR-ADV 4551i II*: Active (BW): 67.6 dB or Less <sup>9</sup> , Standby: 36.8 dB or Less <sup>9</sup> Sound Pressure (LpAm) <sup>7</sup> Bystander's position: iR-ADV 4525i II*: Active (BW): 47.6 dB or Less <sup>9</sup> , Standby: 20 dB or Less <sup>9</sup> iR-ADV 4535i II*: Active (BW): 47.7 dB or Less <sup>9</sup> , Standby: 20 dB or Less <sup>9</sup> iR-ADV 4545i II*: Active (BW): 49.5 dB or Less <sup>9</sup> , Standby: 20.9 dB or Less <sup>9</sup> iR-ADV 4551i II*: Active (BW): 49.8 dB or Less <sup>9</sup> , Standby: 21.1 dB or Less <sup>9</sup>
<b>Address Book/Speed dials</b>	LDAP (2,000)/Local (1,600)/Speed dial (200)	<b>Noise levels</b>	ENERGY STAR® Qualified Ecomark Blue Angel
<b>Send resolution</b>	100 x 100 dpi, 150 x 150 dpi, 200 x 100 dpi, 200 x 200 dpi, 200 x 400 dpi, 300 x 300 dpi, 400 x 400 dpi, 600 x 600 dpi	<b>Standards</b>	
<b>Communication protocol</b>	File: FTP, SMB v3.0, WebDAV E-mail/I-Fax: SMTP, POP3, I-Fax (Simple, Full)	<b>CONSUMABLES</b>	
<b>File Format</b>	Standard: TIFF, JPEG, PDF(Compact, Searchable, Apply policy, Optimize for Web, PDF A/1-b, Encrypted), XPS(Compact, Searchable), Office Open XML (PowerPoint, Word), PDF/XPS(Digital Signature) Optional: PDF(Trace&Smooth)	<b>Toner Cartridge/s</b>	C-EXV 53 TONER BK
<b>FAX SPECIFICATIONS</b>	Optional on all models	<b>Toner (Estimated Yield @ 6% Coverage)</b>	C-EXV 53 TONER BK: 42,100 pages
<b>Optional / Standard Modem Speed</b>	Super G3: 33,6 kbps G3: 14,4 kbps	<b>HARDWARE ACCESSORIES</b>	
<b>Compression Method</b>	MH, MR, MMR, JBIG		
<b>Resolution</b>	400 x 400 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi	<b>Footnotes</b>	
<b>Sending/Recording Size</b>	A5* and A5R* to A3 *Sent as A4	II* indicates that this model has been upgraded to new system software and includes additional security features as standard.	
<b>FAX memory</b>	Up to 30,000 pages	<sup>[1]</sup> With INNER 2/4 HOLE PUNCHER-A1 or INNER 4 HOLE PUNCHER-A1 or INNER 2/F4 HOLE PUNCHER-C1 or INNER S4 HOLE PUNCHER-C1	
<b>Speed dials</b>	Max. 200	<sup>[2]</sup> BOOKLET FINISHER-Y1 only	
<b>Group dials/destinations</b>	Max. 199 dials	<sup>[3]</sup> Time between device power-on and when the start key is enabled. Quick startup Mode ON	
<b>Sequential broadcast</b>	Max. 256 addresses	<sup>[4]</sup> Only PDF print from websites is supported	
<b>Memory backup</b>	Yes	<sup>[5]</sup> Data taken from Blue Angel Certification User Notes	
<b>SECURITY SPECIFICATIONS</b>		<sup>[6]</sup> 0.9W sleep mode is not available in all circumstances due to certain settings.	
<b>Authentication</b>	Standard: Universal Login Manager (Device and Function Level Log-in), uniFLOW Online Express Cloud based management software, User Authentication, Department ID, Authentication, Access Management System Optional: My Print Anywhere secure print (Requires uniFLOW)	<sup>[7]</sup> Typical Electricity Consumption (TEC) rating represents the typical electricity consumed by a product during 1 week, measured in kilowatt-hours (kWh). The test methodology is defined by Energy Star ( <a href="http://www.eu-energystar.org">http://www.eu-energystar.org</a> ).	
<b>Data</b>	Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption(FIPS140-2 Validated), Common Criteria Certification (DIN ISO 15408) Optional: Hard Disk Drive Mirroring, Hard Disk Drive removal, Data Loss Prevention (Requires uniFLOW)	<sup>[8]</sup> Declared noise emission in accordance with ISO 7779	
		<sup>[9]</sup> Data taken from ECO declaration	

## Software & Solutions



## Certifications and compatibility



Canon Inc.  
canon.com

Canon Europe  
canon-europe.com

English edition

© Canon Europa N.V., 2018

