



Canon



DIGITAL RADIOGRAPHY

## CXDI-Pro

Canon's new pro-range wireless flat panel detectors bring you digital radiography everywhere in the hospital. With its improved communication performance and easy system integration, it assists with simplifying x-rays in the department as well as on mobiles and operating theaters.





## Fast

- Cycle time < 5 seconds
- Time for ready < 4 seconds
- Preview 1 second

- Small size detector 27 x 35 coming soon

## Tough, Durable & Light weight

- From 2.9 kg
- Covers can be exchanged
- IP55 water & dust resistant

## Ergonomic design

- Comfortable hold and grip with 4 positions
- Easier to position
- Less strain for operator
- Easy to clean smooth surface

## Battery performance

- More than 9.5 hours in stand by mode
- Battery can easily be exchanged





## Excellent Image quality

- Improved signal to noise ratio




## Scatter correction (optional)

- Excellent image contrast of any body region without a grid
- Reduce detector handling weight
- Eliminate grid misalignments and artefacts
- Dose reduction
- Consistent image quality

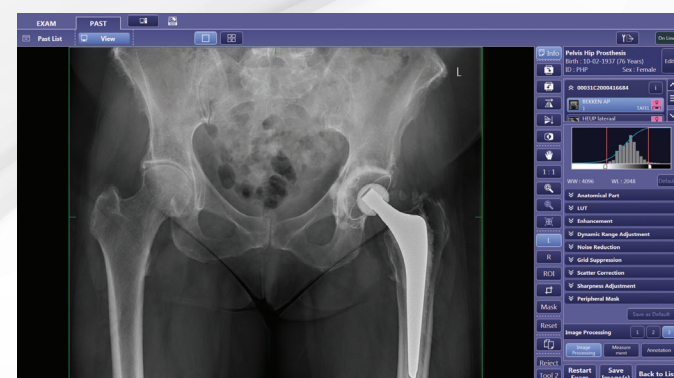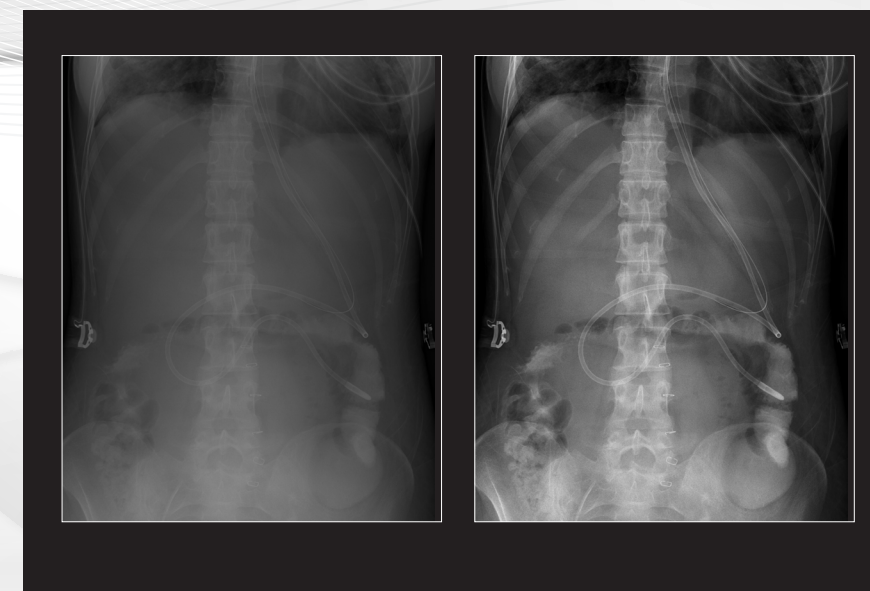

## CXDI Control Software NE

- Optimized workflow
- Body parts and customer specific image processing
- Secure: encryption of data and DICOM compliance
- Optional features like scatter correction, advanced edge enhancement, etc.

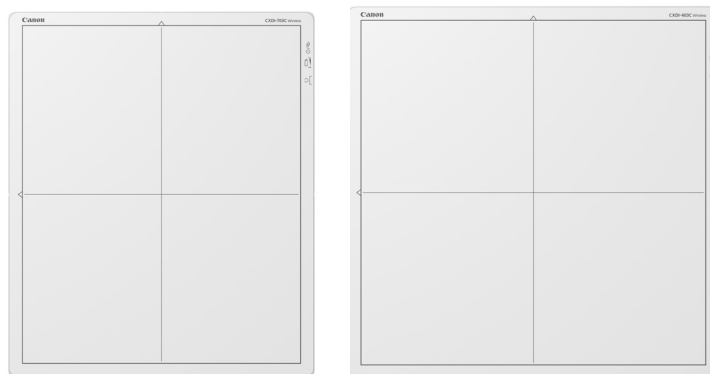

## CXDI-Pro Series Specifications<sup>1</sup>

Model name:	CXDI-703C Wireless	CXDI-403C Wireless
Purpose:	General Radiography	
Scintillator:	CsI (Cesium Iodide)	
Weight (incl. battery):	2.9 kg	3.5 kg
Effective imaging area:	35 x 43 cm	43 x 43 cm
External dimensions:	38 x 46 cm	46 x 46 cm
Image matrix size:	2496 x 3040 pixels	3040 x 3040 pixels
Pixel size:	140 µm	
Resolution:	3.5 lp/mm	
DQE:	Typical 65%(0 lp/mm) / 58%(0.5 lp/mm) <sup>2</sup>	
Grey scale:	A/D: 16bit	
Preview image time:	1 sec. <sup>3</sup>	
Cycle Time:	<5 sec. <sup>3</sup>	
Dust- and waterproof:	IP55 <sup>4</sup>	
Battery performance:	Standard Synchronisation mode Approx. 1500 images @ 7 sec. cycle, 140 images @ 100 sec. cycle. Non-Generator Connection mode Approx. 1500 images @ 7 sec. cycle, 140 images @ 100 sec. cycle.	
Charging performance:	Detector charging in detector stand: approx. 150 min. <sup>5</sup> In battery charger: approx. 150 min. <sup>5</sup>	
Wireless channel/band:	2.4 GHz, 5 GHz (W52, W53, W56, W58) <sup>6</sup>	



Detector stand



Battery Charger



Wiring Cable



Multi Box



Power Box



PC connection cable



Ready Indicator



Status Indicator



Battery Pack

<sup>1</sup>Specifications subject to change.

<sup>2</sup>0 lp/mm is extrapolated value IEC62220-1-1 2015 (RQA5).

<sup>3</sup>Dependent on acquisition mode.

<sup>4</sup>Based on tests conducted by an independent institution.

Certification does not guarantee against failure or damage.

Dust and water resistance may be compromised by substantial impacts (dropping, crushing, etc.).

<sup>5</sup>At an ambient temperature of 25°

<sup>6</sup>W53, W56 supports only in module receiver mode.