



i-SENSYS X 1440P Series

# FULLY SECURE, HIGH-SPEED DEVICES DELIVERING HIGH-QUALITY PRINT OUTPUT

Compact and secure A4 black and white laser printers to complement larger office print solutions



CONNECTIVITY



SECURITY



SUSTAINABILITY



PRODUCTIVITY



CONTROL &  
MAINTENANCE



COMPACT DESIGN

**Canon**

---

# i-SENSYS X 1440P Series

## CONNECTIVITY

- Print from mobile devices, wherever you are
- Remote device set-up and control with the Canon Print Business App
- Connect to cloud directly from the device for simple storage solutions or through Canon's uniFLOW Online for secure print workflows\*

## SECURITY

- Embedded User Authentication secures device access to authorised persons only
- Encrypted Secure Print locks down documents data in transit
- Verify System at Start-up with Automatic Recovery enhances device integrity
- Enjoy latest network security protocol with TLS 1.3 support

## SUSTAINABILITY

- Low energy consumption decreases running costs
- Sleep Mode function and innovative low melting point toner reduce energy consumption further
- Auto Duplex Print decreases paper usage

## PRODUCTIVITY

- Fast print speeds at 40ppm (A4)
- Intuitive control with either 5-line LCD or 5" colour touchscreen display
- Double-sided printing as standard
- Up to 900 sheets paper input capacity

## CONTROL AND MAINTENANCE

- Cloud and server-based software options for centralised fleet control
- Flexible user management solutions for business administrators and IT department
- Remote access to device control functions
- Toner status tool reduces downtime

## COMPACT DESIGN

- Small footprint and weight allow for any office configuration
- Add additional cassettes for enhanced input capacity without compromising on device size
- All-in-one space saving toner cartridge

\*1440P model only

## QUICK FACTS


### i-SENSYS X 1440P

- 5-inch/12.7cm TFT LCD touchscreen
- Print speed: 40 ppm (A4)
- Print resolution: Up to 1,200 x 1,200 dpi
- Automatic Double-sided printing
- uniFLOW compatibility
- Print directly from Cloud (Dropbox, GoogleDrive, OneDrive)
- Network, USB, Wi-Fi and QR code connectivity
- Max paper input capacity: 900 sheets

### i-SENSYS X 1440Pr

- 5-line LCD display
- Print Speed: 40ppm (A4)
- Print resolution: up to 1,200 x 1,200 dpi
- Automatic Double-sided printing
- Network, USB and Wi-Fi connectivity
- Max paper input capacity: 900 sheets

## TAILORED SOLUTIONS TO MEET EVERY CHALLENGE

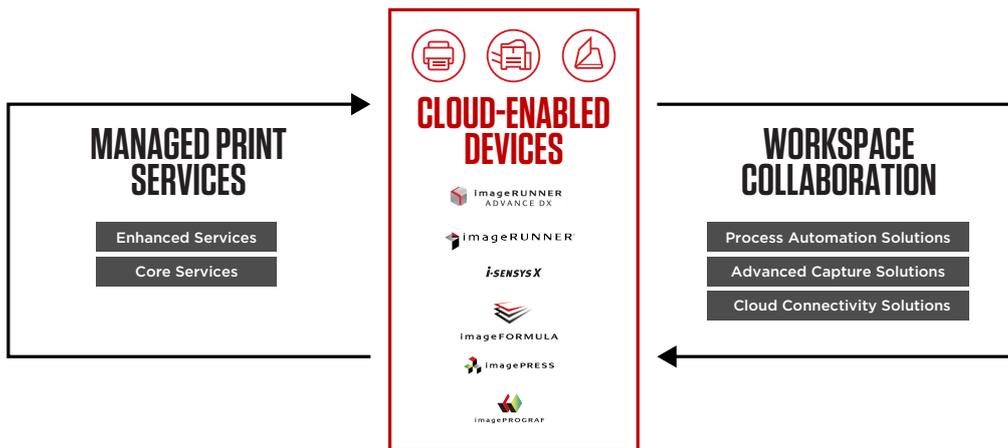

Canon's Digital Transformation Services (DTS), bring together our leading hardware and software into an integrated technology ecosystem, designed to support your transformation journey. This offering combines Managed Print Services and Workspace Collaboration solutions, to help you gain transparency and control over the entire document lifecycle.

# TECHNICAL SPECIFICATIONS

# i-SENSYS X 1440P Series

## PRINTER ENGINE

<b>Print speed</b>	Single sided: Up to 40 ppm (A4) Up to 65.4 ppm(A5-Landscape) Double sided : Up to 33.6 ipm (A4)
<b>Printing method</b>	Monochrome laser beam printing
<b>Print resolution</b>	Up to 1200 x 1200 dpi
<b>Warm-up time</b>	Approx. 14 seconds or less from power on
<b>First Page Out Time</b>	Approx: 5.0 seconds or less
<b>Recommended Monthly Print Volume</b>	750 - 4,000 pages per month
<b>Duty cycle</b>	80,000 pages
<b>Print margins</b>	5 mm-top, bottom, left and right
<b>Advanced printing features</b>	i-SENSYS X 1440P: Encrypted Secure Print Secure Print Print from USB memory key (JPEG/TIFF/PDF) Print from Cloud <sup>1</sup> : uniFLOW Online, Dropbox, GoogleDrive, OneDrive (PDF/JPEG) Barcode Print <sup>2</sup> iOS: AirPrint, Canon PRINT Business app Android; Mopria certified, Canon Print Service Plug-in, Canon PRINT Business app Universal Print by Microsoft

## MEDIA HANDLING

<b>Paper input (Standard)</b>	250-sheet cassette 100-sheet multi-purpose tray
<b>Paper input (Option)</b>	550-sheet cassette
<b>Maximum paper input capacity</b>	900-sheet
<b>Paper output</b>	150-sheet
<b>Media types</b>	Plain paper, Recycled paper, Heavy Paper, Thin paper, Label, Post card, Envelope
<b>Media sizes</b>	Cassette (Standard and optional): A4, A5, A5 (Landscape), A6, B5, Legal, Letter, Executive, Statement, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolscap, 16K, Custom sizes: Min. 105 x 148 mm Max. 216.0 x 355.6 mm.  Multi-purpose tray: A4, A5, A5 (Landscape), A6, B5, Legal, Letter, Executive, Statement, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolscap, 16K, Indexcard, Envelope (COM10, Monarch, C5, DL), Custom sizes: Min 76.2 x 127 mm Max. 216.0 x 355.6 mm.
<b>Media weights</b>	Cassette (standard and optional): 60 to 120 g/m <sup>2</sup> Multi-purpose tray: 60 to 199 g/m <sup>2</sup>
<b>Double sided printing</b>	A4, Legal, Letter, OFFICIO, B-OFFICIO, M-OFFICIO, GLGL, Foolscap Custom size - Min. 210 x 279.4 mm Max. 216.0 x 355.6 mm

## GENERAL FEATURES

<b>Power requirements</b>	220-240V(±10%) 50/60Hz (±2Hz)
<b>Power consumption</b>	Maximum: Approx. 1,250 W Active printing: Approx. 480W Standby: Approx. 6 W Sleep mode: Approx. 0.9 W Typical Electricity Consumption (TEC): 0.33 kWh/week <sup>4</sup> For detailed information relating to Lot26 regulation, please go to: <a href="http://www.canon-europe.com/For_Work/Lot26/index.aspx">http://www.canon-europe.com/For_Work/Lot26/index.aspx</a>
<b>Noise level</b>	Sound Pressure <sup>3</sup> : Active: 54 dB Standby: Inaudible <sup>4</sup>  Sound Power <sup>2</sup> : Active: 68 dB Standby: Inaudible <sup>4</sup>
<b>Dimensions (W x D x H)</b>	i-SENSYS X 1440P : 438 mm x 373 mm x 312 mm i-SENSYS X 1440Pr : 401 mm x 373 mm x 250 mm
<b>Weight</b>	i-SENSYS X 1440P : Approx. 9.2 Kg i-SENSYS X 1440Pr: Approx. 8.8 Kg
<b>Operating environment</b>	Temperature: 10 to 30°C (50 to 86°F) Humidity 20 to 80% RH (no condensation)

## Control panel

i-SENSYS X 1440P : 12.7 cm LCD Colour Touch Screen  
i-SENSYS X 1440Pr : 5 Line LCD, 3 LED (Job, Error, Energy saver), Buttons, 10-key numeric keypad

## CONTROLLER

<b>Processor Speed</b>	1200MHZ
<b>Memory</b>	1GB
<b>Storage</b>	4GB eMMC
<b>Printer Languages</b>	UFRII, PCL 5e <sup>5</sup> , PCL6, Adobe® PostScript3

## FonTS

93 PCL fonts, 136 PS fonts

## Interface and connectivity

USB 2.0 Hi-Speed, 10BASE-T/  
100BASE-TX/1000Base-T, Wireless 802.11b/g/n, Wireless Direct Connection

## Network Protocol

Print:  
TCP/IP (LPD/Port9100/IPP/IPPS/WSD)

Management:  
SNMPv1, SNMPv3 (IPv4,IPv6)

Security:  
TLS1.3, IPsec, IP/Mac address filtering, IEEE802.1X, SNMPv3, SSL (HTTPS, IPPS)  
Security (wireless):  
Infrastructure Mode: WEP(64/128 bit), WPA-PSK(TKIP/AES), WPA2-PSK(TKIP/AES), WPA-EAP(AES), WPA2-EAP(AES)  
Access Point Mode: WPA2-PSK(AES)

## Software and Printer Management

i-SENSYS X 1440P:  
Remote User Interface (RUI), Remote operation software, Department ID Management, Toner Status Tool,  
iW Enterprise Management Console: Server-based software for centralised management of a fleet of devices  
eMaintenance: embedded RDS allows remote eMaintenance services such as meter capture, automatic consumables management and remote diagnostics.  
Universal Log-in Manager / uniFLOW online / uniFLOW online Express / uniFLOW compatibility / Application Library

i-SENSYS X 1440Pr:  
Remote User Interface (RUI), Department ID Management, Toner Status Tool,  
iW Enterprise Management Console: Server-based software for centralised management of a fleet of devices  
eMaintenance: embedded RDS allows remote eMaintenance services such as meter capture, automatic consumables management and remote diagnostics.

## Operating Systems Compatibility

Windows® 11 / Windows® 10 / Server® 2022 / Server® 2019 / Server® 2016 / Server® 2012R2 / Server® 2012  
Mac OS X version 10.13 & up  
Linux®

## CONSUMABLES

**All-in-One cartridges** TONER T13 (10,600 pages<sup>7</sup>)

## ACCESSORIES/ OPTIONS

### Items

i-SENSYS X 1440P:  
Cassette Feeding Module-AH1  
MiCard Multi (Card reader for identification with RFID or magnetic cards with uniFLOW)  
Micard Plus (Card reader for identification with RFID or magnetic cards with uniFLOW)  
MiCard Attachment kit-B1  
Barcode Printing Kit-E1E

i-SENSYS X 1440Pr:  
Cassette Feeding Module-AH1  
Barcode Printing Kit-E1E

### Notes:

- <sup>(1)</sup> Subscription to uniFLOW Online and/or third party cloud service is required.
- <sup>(2)</sup> Accessory - Barcode Printing Kit-E1E - is required.
- <sup>(3)</sup> Declared noise emission in accordance with ISO 9296.
- <sup>(4)</sup> Inaudible means that the emission sound pressure level for a bystander is lower than absolute standard for background noise in accordance with ISO 7779.
- <sup>(5)</sup> A Canon PCL5e driver is not supplied, however PCL5e commands are supported on the device.
- <sup>(6)</sup> Web distribution only.
- <sup>(7)</sup> Based on ISO/IEC 19752
- <sup>(8)</sup> As per US ENERGY STAR® version3.0.

## Software & Solutions



## Compatibility



Canon Inc.  
canon.com

Canon Europe  
canon-europe.com

English edition  
© Canon Europa N.V., 2023

# Canon

---