



i-SENSYS X C1333i Series

ACCELERATE YOUR WORK

High quality, compact A4 colour multifunction printers with cloud connectivity



PRODUCTIVITY



**CONTROL AND
MAINTENANCE**



CONNECTIVITY



COMPACT DESIGN



SECURITY



SUSTAINABILITY

Canon

i-SENSYS X C1333i Series

PRODUCTIVITY

- Large, responsive touchscreen display
- Easy customisation of device functions
- Fast start and print output
- Double-sided printing as standard
- One Pass Scan for fast digitisation of paper documents

CONNECTIVITY

- Remote device set-up and control with the Canon Print Business App
- Connect to cloud directly from the device for simple storage solutions or through Canon's uniFLOW Online for secure advanced scan workflows
- Print from and scan to mobile devices wherever you are

CONTROL AND MAINTENANCE

- Remote diagnostics and assistance help minimise downtime
- Cloud and server-based software options centralise fleet control
- Access printer control functions via PC or mobile devices
- Easy toner replacement

SECURITY

- Verify System at Start-up protects device functionality
- Encrypted Secure Print function prevents unauthorised viewing of printed material
- Scan and send documents securely with optional Encrypted PDF mode
- Enhanced security protocol with TLS 1.3

COMPACT DESIGN

- Compact devices feature an all-in-one toner cartridge
- Flexible configuration integrates device into any office environment
- Easy access to replace consumables

SUSTAINABILITY

- Low TEC (Typical Electrical Consumption) decreases power consumption to save energy and lower running costs
- Sleep mode reduces energy consumption further
- Auto Duplex Print saves on paper wastage

QUICK FACTS


i-SENSYS X C1333i

- Print, Copy, Scan and Send
- 5-inch/12.7cm TFT LCD touchscreen
- Print Speed: 33ppm (A4)
- Print resolution: up to 1,200 x 1,200 dpi
- Automatic double-sided printing
- Scan speed: up to 100ipm
- Network, Wi-Fi, USB and QR code connectivity
- Max paper input capacity: 850 sheets

i-SENSYS X C1333iF

- Print, Copy, Scan, Send and Fax
- 5-inch/12.7cm TFT LCD touchscreen
- Print Speed: 33ppm (A4)
- Print resolution: up to 1,200 x 1,200 dpi
- Automatic double-sided printing
- Scan speed: up to 100ipm
- Network, Wi-Fi, USB and QR code connectivity
- Max paper input capacity: 850 sheets

TAILORED SOLUTIONS TO MEET EVERY CHALLENGE

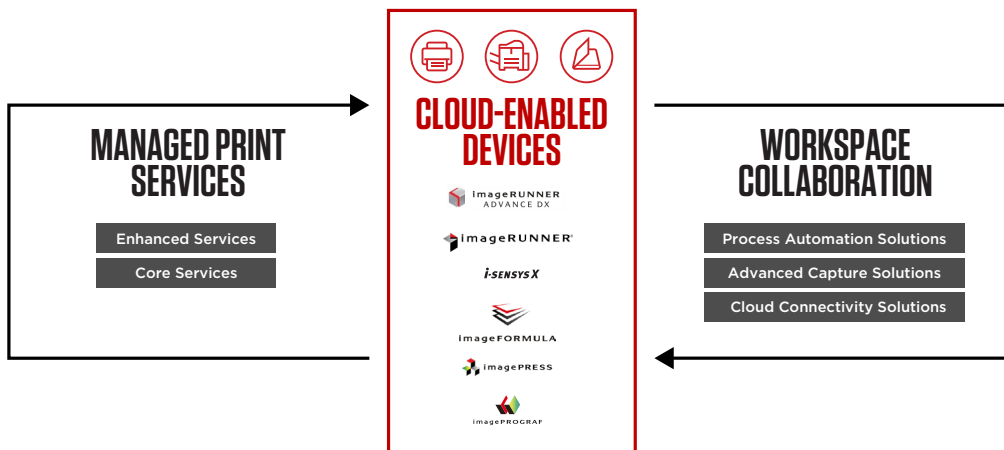

Canon's Digital Transformation Services (DTS), bring together our leading hardware and software into an integrated technology ecosystem, designed to support your transformation journey. This offering combines Managed Print Services and Workspace Collaboration solutions, to help you gain transparency and control over the entire document lifecycle.

Canon

TECHNICAL SPECIFICATIONS

i-SENSYS X C1333i Series

Machine type	Colour Laser All-In-One
Available functions	i-SENSYS X C1333iF: Print, Copy, Scan and Fax i-SENSYS X C1333i: Print, Copy, Scan
PRINTER	
Print speed	Single sided : Up to 33 ppm (A4) Up to 60 ppm(A5-Landscape) Double sided : Up to 29.5 ipm (A4)
Printing method	Colour laser beam printing
Print resolution	1200 x 1200 dpi
Warm-up time	Approx. 14 seconds or less from power on
First Print Out Time	Approx.: 7.1 seconds or less
Printer languages	UFRII, PCL 5c ² , PCL6, Adobe® PostScript3
Fonts	93 PCL fonts 136 PostScript fonts
Print margins	5 mm-top, bottom, left and right 10 mm-top, bottom, left and right (Envelope)
Toner saver mode	Yes
Advanced printing features	Encrypted Secure Print Secure Print Print from USB memory key (JPEG/TIFF/PDF) Print from Cloud ¹ : uniFLOW Online, Dropbox, GoogleDrive, OneDrive (PDF/JPEG) Microsoft Universal Print support Barcode Print ³ iOS: AirPrint, Canon PRINT Business app Android; Mopria certified, Canon Print Service Plug-in, Canon PRINT Business app
COPIER	
Copy speed	Single sided (A4): Up to 33 ppm Double sided (A4): Up to 29 ipm
First Copy Output Time (FCOT)	ADF (A4): Colour Approx. 8.8 seconds or less Mono Approx. 7.6 seconds or less Platen (A4): Colour Approx. 9.4 seconds or less Mono Approx. 8.3 seconds or less
Copy resolution	Up to 600 x 600 dpi
Copy modes	Text/Photo/Map (Default),Text/Photo/Map (quality), Printed Image, Text
Double sided copying	2-sided to 2-sided (Automatic)
Multiple copy	Up to 999 copies
Reduction / Enlargement	25-400% in 1% increments
Other features	Frame Erase, Collate, 2 on 1, 4 on 1, ID card copy, Reserved copy
SCANNER	
Type	Colour
Scan resolution	Optical: Up to 600 x 600 dpi Enhanced: Up to 9600 x 9600 dpi
Scan speed	Single sided (mono/colour, 300x300dpi): 50/40ipm Double sided (mono/colour, 300x300dpi): 100/80ipm Single sided (mono/colour, 300x600dpi): 40/20ipm Double sided (mono/colour, 300x600dpi): 80/40ipm
Colour scanning depth	24 bit/24 bit (input/output)
Greyscales	256 levels
Compatibility	TWAIN , WIA, ICA
Max. scan width	216mm
Scan to E-mail	TIFF/JPEG/PDF/Compact PDF/Searchable PDF/ Encrypted PDF ⁴ /PDF (Digital signature) ⁴ /PDF A-1b
Scan to PC	TIFF/JPEG/PDF/Compact PDF/Searchable PDF/ Encrypted PDF ⁴ /PDF (Digital signature) ⁴ /PDF A-1b
Scan to USB memory key	TIFF/JPEG/PDF/Compact PDF/Searchable PDF/ Encrypted PDF ⁴ /PDF (Digital signature) ⁴ /PDF A-1b
Scan to FTP	TIFF/JPEG/PDF/Compact PDF/Searchable PDF/ Encrypted PDF ⁴ /PDF (Digital signature) ⁴ /PDF A-1b
Scan to Cloud	TIFF/JPEG/PDF/PNG ⁵
iFAX	ITU-T.37

FAX	i-SENSYS X C1333iF only
Modem speed	33.6 Kbps (Up to 3 seconds/page ⁵)
Receive mode	Fax only, Fax/Tel Auto Switch, Answer Mode, Manual
Fax resolution	Standard: 200 x 100 dpi Fine: 200 x 200 dpi Super fine: 200 x 400 dpi Ultra fine: 400 x 400 dpi
FAX memory	Up to 512 pages ⁶
Speed dials	Up to 281 dials
Group dials/destinations	Max. 299 dials / Max. 299 destinations
Sequential broadcast	Max. 310 destinations
Memory backup	Permanent fax memory backup (Backup with flash memory)
Double sided faxing	Yes (Transmit and Receive)
Other features	Sender's Name (TTI), Direct Send, Review, TX Report, Sequential Broadcasting
MEDIA HANDLING	
Scanner type	Platen, 2-sided ADF (single pass)
Paper input (Standard)	250-sheet cassette 50-sheet multi-purpose tray 50-sheet ADF
Paper input (Option)	550-sheet cassette
Paper output	150-sheet
Media types	Plain paper, Recycled paper, Heavy Paper, Thin paper, Colour paper, Coated paper, Label, Post card, Envelope
Media sizes	Cassette (Standard): A4, A5, A5 (Landscape), A6, B5, Legal, Letter, Executive, Statement, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolscap, 16K, Post card, Envelop (COM10, DL, C5), Custom sizes: Min. 98 x 148 mm Max. 216.0 x 356.0 mm. Multi-purpose tray: A4, A5, A5 (Landscape), A6, B5, Legal, Letter, Executive, Statement, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolscap, 16K, Post card, Indexcard, Envelope (COM10, DL, C5), Custom sizes: Min 76.0 x 127 mm Max. 216.0 x 356.0 mm. Cassette (Optional): A4, A5, A5 (Landscape), A6, B5, Legal, Letter, Executive, Statement, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolscap, 16K, Post card, Envelop (COM10, DL, C5), Custom sizes: Min. 100 x 148 mm Max. 216.0 x 356.0 mm.
Media weights	ADF: A4, A5, A6, B5, Legal, Letter, Statement, Custom sizes: Min. 48 x 85.0 mm Max 216.0 x 355.6 mm Cassette (standard and optional): 60 to 163 g/m ² (Up to 200 g/m ² with Coated paper) Multi-purpose tray: 60 to 176 g/m ² (Up to 200 g/m ² with Coated paper) ADF: 50 to 105 g/m ²
Double sided printing	Automatic Cassette: A4, A5, B5, Legal, Letter, Executive, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolscap, 16K Custom size - Min. 148 x 148 mm Max. 216 x 356 mm 60 to 200 g/m ²
INTERFACE & SOFTWARE	
Interface type	USB 2.0 Hi-Speed, 10BASE-T/100BASE-TX/1000Base-T, Wireless 802.11b/g/n, Wireless Direct Connection
Operating System compatibility	Windows® 11 / 10 / 8.1 / Server 2022 / Server 2019 / Server 2016 / Server 2012R2 / Server / 2012 / Server 2008R2 / Server 2008, Mac OS X (10.12 or later), Linux ⁸
Network Protocol	Print: TCP/IP (LPD/Port9100/IPP/IPPS/WSD) Scan: Push Scan: File: FTP (TCP/IP), SMB3.0 (TCP/IP) E-mail/I-Fax: SMTP (send), POP3 (receive) Pull Scan: TCP/IP Management: SNMPv1, SNMPv3 (IPv4,IPv6) Security (wired): TLS 1.3, IPsec, IP/Mac address filtering, IEEE802.1X, SNMPv3, SSL (HTTPS, IPPS) Security (wireless): IEEE802.1X Infrastructure Mode: WEP(64/128 bit), WPA-PSK(TKIP/AES), WPA2-PSK(TKIP/AES) Access Point Mode: WPA2-PSK(AES)

TECHNICAL SPECIFICATIONS

i-SENSYS X C1333i Series

Software and printer management

MF Scan Utility,
Remote User Interface (RUI),
Department ID Management,
Toner Status Tool,
iW Enterprise Management Console: Server-based software for centralised management of a fleet of devices
eMaintenance: embedded RDS allows remote eMaintenance services such as meter capture, automatic consumables management and remote diagnostics.
Universal Log-in Manager / uniFLOW online / uniFLOW online Express / uniFLOW Compatibility Application Library

GENERAL FEATURES

Recommended Monthly Print Volume	750 - 4,000 pages per month
Duty cycle	Max. 50,000 pages per month ⁸
Processor Speed	1200MHz x 2
Memory	1GB
Control panel	12.7 cm LCD Colour Touch Screen
Dimensions with trays (W x D x H)	425 mm x 461 mm x 430 mm
Installation space (W x D x H)	625 mm x 1,117 mm x 991 mm
Weight	C1333iF: Approx. 22 Kg C1333i: Approx. 21.7 Kg
Operating environment	Temperature: 10 to 30°C (50 to 86°F) Humidity: 20 to 80% RH (no condensation)
Power Source	220-240V(±10%) 50/60Hz (±2Hz)
Power Consumption	Maximum: Approx. 1,380 W Active printing: Approx. 700W Standby: Approx. 24.0 W Sleep mode: Approx. 1.0 W Typical Electricity Consumption (TEC): 0.30 kWh/week ¹¹ For detailed information relating to Lot26 regulation, please go to: http://www.canon-europe.com/For_Work/Lot26/index.aspx
Noise Levels	Sound Pressure ⁹ : Active: Simplex 51dB / Duplex 51dB (BW), 50dB (CL) Standby: 29dB Sound Power ⁹ : Active: 65dB or less Standby: 41dB or less

CONSUMABLES

Cartridges

TONER T12 Black (7,400 pages¹⁰)
TONER T12 Cyan (5,300 pages¹⁰)
TONER T12 Magenta (5,300 pages¹⁰)
TONER T12 Yellow (5,300 pages¹⁰)

ACCESSORIES/ OPTIONS

Items

i-SENSYS X C1333iF:
PAPER FEEDER PF-K1 (550-sheet cassette)
TEL 6 Kit Long Cord (Telephone handset)
Barcode Printing Kit-E1E
MiCard Multi (Card reader for identification with RFID or magnetic cards with uniFLOW)
Micard Plus (Card reader for identification with RFID or magnetic cards with uniFLOW)
MiCard Attachment Kit-B1
Send PDF Security Feature Set-E1
Copy Card Reader-F1
Copy Card Reader Attachment-J1
Copy Control Interface Kit-C1

i-SENSYS X C1333i:
PAPER FEEDER PF-K1 (550-sheet cassette)
Barcode Printing Kit-E1E
MiCard Multi (Card reader for identification with RFID or magnetic cards with uniFLOW)
Micard Plus (Card reader for identification with RFID or magnetic cards with uniFLOW)
MiCard Attachment Kit-B1
Send PDF Security Feature Set-E1
Copy Card Reader-F1
Copy Card Reader Attachment-J1
Copy Control Interface Kit-C1

Notes:

- ^[1] Subscription to uniFLOW Online or third party services required
- ^[2] Commands supported only. Third party driver or direct printing from application required.
- ^[3] Accessory Barcode Printing Kit-E1E - is required
- ^[4] Accessory - Send PDF Security Feature Set-E1 is required
- ^[5] Scan by MF Scan Utility or Canon PRINT Business app
- ^[6] Based on ITU-T Standard Chart No. 1
- ^[7] Web distribution only. Linux support printing only.
- ^[8] Duty cycle is defined as the maximum number of printed pages for a single peak month. Any usage above the recommended duty cycle may decrease the life of the product
- ^[9] Declared noise emission in accordance with ISO 7779. Based on ISO9296, below figure is different - Active: 62dB or less
- ^[10] Based on ISO/IEC 19798
- ^[11] As per US ENERGY STAR® version3.0.

Software & Solutions



Compatibility



Canon Inc.
canon.com

Canon Europe
canon-europe.com

English edition
© Canon Europa N.V., 2024