



## i-SENSYS X C1333i Series

# ACCELERATE YOUR WORK

High quality, compact A4 colour multifunction printers with cloud connectivity



**PRODUCTIVITY**



**CONTROL AND  
MAINTENANCE**



**CONNECTIVITY**



**COMPACT DESIGN**



**SECURITY**



**SUSTAINABILITY**

**Canon**

---

# i-SENSYS X C1333i Series

## PRODUCTIVITY

- Large, responsive touchscreen display
- Easy customisation of device functions
- Fast start and print output
- Double-sided printing as standard
- One Pass Scan for fast digitisation of paper documents

## CONNECTIVITY

- Remote device set-up and control with the Canon Print Business App
- Connect to cloud directly from the device for simple storage solutions or through Canon's uniFLOW Online for secure advanced scan workflows
- Print from and scan to mobile devices wherever you are

## CONTROL AND MAINTENANCE

- Remote diagnostics and assistance help minimise downtime
- Cloud and server-based software options centralise fleet control
- Access printer control functions via PC or mobile devices
- Easy toner replacement

## SECURITY

- Verify System at Start-up protects device functionality
- Encrypted Secure Print function prevents unauthorised viewing of printed material
- Scan and send documents securely with optional Encrypted PDF mode
- Enhanced security protocol with TLS 1.3

## COMPACT DESIGN

- Compact devices feature an all-in-one toner cartridge
- Flexible configuration integrates device into any office environment
- Easy access to replace consumables

## SUSTAINABILITY

- Low TEC (Typical Electrical Consumption) decreases power consumption to save energy and lower running costs
- Sleep mode reduces energy consumption further
- Auto Duplex Print saves on paper wastage

## QUICK FACTS


### i-SENSYS X C1333i

- Print, Copy, Scan and Send
- 5-inch/12.7cm TFT LCD touchscreen
- Print Speed: 33ppm (A4)
- Print resolution: up to 1,200 x 1,200 dpi
- Automatic double-sided printing
- Scan speed: up to 100ipm
- Network, Wi-Fi, USB and QR code connectivity
- Max paper input capacity: 850 sheets

### i-SENSYS X C1333iF

- Print, Copy, Scan, Send and Fax
- 5-inch/12.7cm TFT LCD touchscreen
- Print Speed: 33ppm (A4)
- Print resolution: up to 1,200 x 1,200 dpi
- Automatic double-sided printing
- Scan speed: up to 100ipm
- Network, Wi-Fi, USB and QR code connectivity
- Max paper input capacity: 850 sheets

## TAILORED SOLUTIONS TO MEET EVERY CHALLENGE

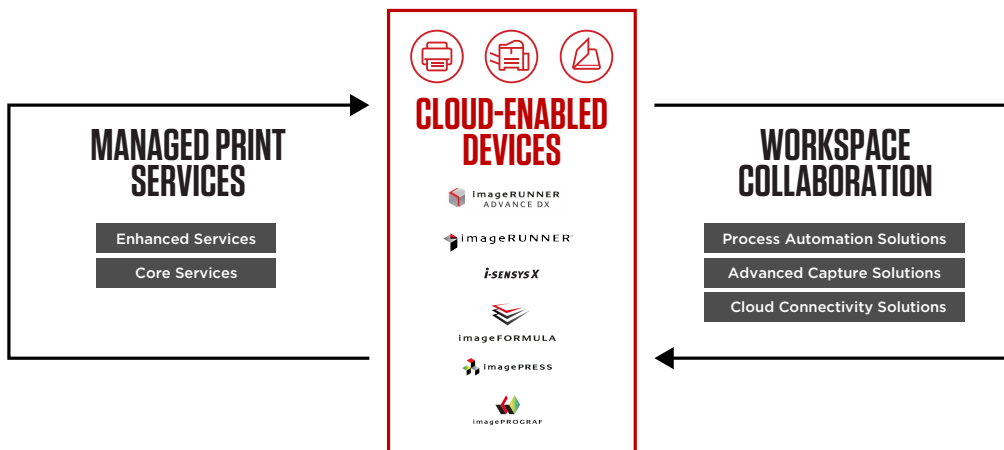

Canon's Digital Transformation Services (DTS), bring together our leading hardware and software into an integrated technology ecosystem, designed to support your transformation journey. This offering combines Managed Print Services and Workspace Collaboration solutions, to help you gain transparency and control over the entire document lifecycle.

# TECHNICAL SPECIFICATIONS

# i-SENSYS X C1333i Series

<b>Machine type</b>	Colour Laser All-In-One	<b>FAX</b>	i-SENSYS X C1333iF only
<b>Available functions</b>	i-SENSYS X C1333iF: Print, Copy, Scan and Fax i-SENSYS X C1333i: Print, Copy, Scan	<b>Modem speed</b>	33.6 Kbps (Up to 3 seconds/page <sup>5</sup> )
<b>PRINTER</b>		<b>Receive mode</b>	Fax only, Fax/Tel Auto Switch, Answer Mode, Manual
<b>Print speed</b>	Single sided : Up to 33 ppm (A4) Up to 60 ppm(A5-Landscape) Double sided : Up to 29.5 ipm (A4)	<b>Fax resolution</b>	Standard: 200 x 100 dpi Fine: 200 x 200 dpi Super fine: 200 x 400 dpi Ultra fine: 400 x 400 dpi
<b>Printing method</b>	Colour laser beam printing	<b>FAX memory</b>	Up to 512 pages <sup>6</sup>
<b>Print resolution</b>	1200 x 1200 dpi	<b>Speed dials</b>	Up to 281 dials
<b>Warm-up time</b>	Approx. 14 seconds or less from power on	<b>Group dials/destinations</b>	Max. 299 dials / Max. 299 destinations
<b>First Print Out Time</b>	Approx.: 7.1 seconds or less	<b>Sequential broadcast</b>	Max. 310 destinations
<b>Printer languages</b>	UFRII, PCL 5c <sup>2</sup> , PCL6, Adobe® PostScript3	<b>Memory backup</b>	Permanent fax memory backup (Backup with flash memory)
<b>Fonts</b>	93 PCL fonts 136 PostScript fonts	<b>Double sided faxing</b>	Yes (Transmit and Receive)
<b>Print margins</b>	5 mm-top, bottom, left and right 10 mm-top, bottom, left and right (Envelope)	<b>Other features</b>	Sender's Name (TTI), Direct Send, Review, TX Report, Sequential Broadcasting
<b>Toner saver mode</b>	Yes	<b>MEDIA HANDLING</b>	
<b>Advanced printing features</b>	Encrypted Secure Print Secure Print Print from USB memory key (JPEG/TIFF/PDF) Print from Cloud <sup>1</sup> : uniFLOW Online, Dropbox, GoogleDrive, OneDrive (PDF/JPEG) Microsoft Universal Print support Barcode Print <sup>3</sup> iOS: AirPrint, Canon PRINT Business app Android; Mopria certified, Canon Print Service Plug-in, Canon PRINT Business app	<b>Scanner type</b>	Platen, 2-sided ADF (single pass)
<b>COPIER</b>		<b>Paper input (Standard)</b>	250-sheet cassette 50-sheet multi-purpose tray 50-sheet ADF
<b>Copy speed</b>	Single sided (A4): Up to 33 ppm Double sided (A4): Up to 29 ipm	<b>Paper input (Option)</b>	550-sheet cassette
<b>First Copy Output Time (FCOT)</b>	ADF (A4): Colour Approx. 8.8 seconds or less Mono Approx. 7.6 seconds or less Platen (A4): Colour Approx. 9.4 seconds or less Mono Approx. 8.3 seconds or less	<b>Paper output</b>	150-sheet
<b>Copy resolution</b>	Up to 600 x 600 dpi	<b>Media types</b>	Plain paper, Recycled paper, Heavy Paper, Thin paper, Colour paper, Coated paper, Label, Post card, Envelope
<b>Copy modes</b>	Text/Photo/Map (Default),Text/Photo/Map (quality), Printed Image, Text	<b>Media sizes</b>	Cassette (Standard): A4, A5, A5 (Landscape), A6, B5, Legal, Letter, Executive, Statement, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolscap, 16K, Post card, Envelop (COM10, DL, C5), Custom sizes: Min. 98 x 148 mm Max. 216.0 x 356.0 mm.
<b>Double sided copying</b>	2-sided to 2-sided (Automatic)		Multi-purpose tray: A4, A5, A5 (Landscape), A6, B5, Legal, Letter, Executive, Statement, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolscap, 16K, Post card, Indexcard, Envelope (COM10, DL, C5, Monarch), Custom sizes: Min 76.0 x 127 mm Max. 216.0 x 356.0 mm.
<b>Multiple copy</b>	Up to 999 copies		Cassette (Optional): A4, A5, A5 (Landscape), A6, B5, Legal, Letter, Executive, Statement, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolscap, 16K, Post card, Envelop (COM10, DL, C5), Custom sizes: Min.100 x 148 mm Max. 216.0 x 356.0 mm.
<b>Reduction / Enlargement</b>	25-400% in 1% increments		ADF: A4, A5, A6, B5, Legal, Letter, Statement, Custom sizes: Min. 48 x 85.0 mm Max 216.0 x 355.6 mm
<b>Other features</b>	Frame Erase, Collate, 2 on 1, 4 on 1, ID card copy, Reserved copy	<b>Media weights</b>	Cassette (standard and optional): 60 to 163 g/m <sup>2</sup> (Up to 200 g/m <sup>2</sup> with Coated paper) Multi-purpose tray: 60 to 176 g/m <sup>2</sup> (Up to 200 g/m <sup>2</sup> with Coated paper) ADF: 50 to 105 g/m <sup>2</sup>
<b>SCANNER</b>		<b>Double sided printing</b>	Automatic Cassette: A4, A5, A6, B5, Legal, Letter, Executive, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolscap, 16K Custom size - Min. 148 x 148 mm Max. 216 x 356 mm 60 to 200 g/m <sup>2</sup>
<b>Type</b>	Colour	<b>INTERFACE &amp; SOFTWARE</b>	
<b>Scan resolution</b>	Optical: Up to 600 x 600 dpi Enhanced: Up to 9600 x 9600 dpi	<b>Interface type</b>	USB 2.0 Hi-Speed, 10BASE-T/100BASE-TX/1000Base-T, Wireless 802.11b/g/n, Wireless Direct Connection
<b>Scan speed</b>	Single sided (mono/colour, 300x300dpi): 50/40ipm Double sided (mono/colour, 300x300dpi): 100/80ipm Single sided (mono/colour, 300x600dpi): 40/20ipm Double sided (mono/colour, 300x600dpi): 80/40ipm	<b>Operating System compatibility</b>	Windows® 11 / 10 / 8.1 / Server 2022 / Server 2019 / Server 2016 / Server 2012R2 / Server / 2012 / Server 2008R2 / Server 2008, Mac OS X (10.12 or later), Linux <sup>4</sup>
<b>Colour scanning depth</b>	24 bit/24 bit (input/output)	<b>Network Protocol</b>	Print: TCP/IP (LPD/Port9100/IPP/IPPS/WSD) Scan: Push Scan: File: FTP (TCP/IP), SMB3.0 (TCP/IP) E-mail/I-Fax: SMTP (send), POP3 (receive) Pull Scan: TCP/IP Management: SNMPv1, SNMPv3 (IPv4,IPv6) Security (wired): TLS 1.3, IPsec, IP/Mac address filtering, IEEE802.1X, SNMPv3, SSL (HTTPS, IPPS) Security (wireless): IEEE802.1X Infrastructure Mode: WEP(64/128 bit), WPA-PSK(TKIP/AES), WPA2-PSK(TKIP/AES) Access Point Mode: WPA2-PSK(AES)
<b>Greyscales</b>	256 levels		
<b>Compatibility</b>	TWAIN , WIA, ICA		
<b>Max. scan width</b>	216mm		
<b>Scan to E-mail</b>	TIFF/JPEG/PDF/Compact PDF/Searchable PDF/ Encrypted PDF <sup>4</sup> /PDF (Digital signature) <sup>4</sup>		
<b>Scan to PC</b>	TIFF/JPEG/PDF/Compact PDF/Searchable PDF/ Encrypted PDF <sup>4</sup> /PDF (Digital signature) <sup>4</sup>		
<b>Scan to USB memory key</b>	TIFF/JPEG/PDF/Compact PDF/Searchable PDF/ Encrypted PDF <sup>4</sup> /PDF (Digital signature) <sup>4</sup>		
<b>Scan to FTP</b>	TIFF/JPEG/PDF/Compact PDF/Searchable PDF/ Encrypted PDF <sup>4</sup> /PDF (Digital signature) <sup>4</sup>		
<b>Scan to Cloud</b>	TIFF/JPEG/PDF/PNG <sup>5</sup>		
<b>iFAX</b>	ITU-T.37		

# TECHNICAL SPECIFICATIONS

# i-SENSYS X C1333i Series

## Software and printer management

MF Scan Utility,  
Remote User Interface (RUI),  
Department ID Management,  
Toner Status Tool,  
iW Enterprise Management Console: Server-based software for centralised management of a fleet of devices  
eMaintenance: embedded RDS allows remote eMaintenance services such as meter capture, automatic consumables management and remote diagnostics.  
Universal Log-in Manager / uniFLOW online / uniFLOW online Express / uniFLOW Compatibility Application Library

## GENERAL FEATURES

**Recommended Monthly Print Volume**

750 - 4,000 pages per month

**Duty cycle**

Max. 50,000 pages per month<sup>9</sup>

**Processor Speed**

1200MHz x 2

**Memory**

1GB

**Control panel**

12.7 cm LCD Colour Touch Screen

**Dimensions with trays (W x D x H)**

425 mm x 461 mm x 430 mm

**Installation space (W x D x H)**

625 mm x 1,117 mm x 991 mm

**Weight**

C1333iF: Approx. 22 Kg  
C1333i: Approx. 21.7 Kg

**Operating environment**

Temperature: 10 to 30°C (50 to 86°F)  
Humidity: 20 to 80% RH (no condensation)

**Power Source**

220-240V(±10%) 50/60Hz (±2Hz)

**Power Consumption**

Maximum: Approx. 1,380 W  
Active printing: Approx. 700W  
Standby: Approx. 24.0 W  
Sleep mode: Approx. 1.0 W  
Typical Electricity Consumption (TEC): 0.30 kWh/week<sup>11</sup>

**Noise Levels**

Sound Pressure<sup>9</sup> :  
Active: Simplex 51dB / Duplex 51dB (BW), 50dB (CL)  
Standby: 29dB

Sound Power<sup>9</sup>:  
Active: 65dB or less  
Standby: 41dB or less

## CONSUMABLES

**Cartridges**

TONER T12 Black (7,400 pages<sup>10</sup>)  
TONER T12 Cyan (5,300 pages<sup>10</sup>)  
TONER T12 Magenta (5,300 pages<sup>10</sup>)  
TONER T12 Yellow (5,300 pages<sup>10</sup>)

## ACCESSORIES/ OPTIONS

**Items**

i-SENSYS X C1333iF:  
PAPER FEEDER PF-K1 (550-sheet cassette)  
TEL 6 Kit Long Cord (Telephone handset)  
Barcode Printing Kit-E1E  
MiCard Multi (Card reader for identification with RFID or magnetic cards with uniFLOW)  
Micard Plus (Card reader for identification with RFID or magnetic cards with uniFLOW)  
MiCard Attachment Kit-B1  
Send PDF Security Feature Set-E1  
Copy Card Reader-F1  
Copy Card Reader Attachment-J1  
Copy Control Interface Kit-C1

i-SENSYS X C1333i:  
PAPER FEEDER PF-K1 (550-sheet cassette)  
Barcode Printing Kit-E1E  
MiCard Multi (Card reader for identification with RFID or magnetic cards with uniFLOW)  
Micard Plus (Card reader for identification with RFID or magnetic cards with uniFLOW)  
MiCard Attachment Kit-B1  
Send PDF Security Feature Set-E1  
Copy Card Reader-F1  
Copy Card Reader Attachment-J1  
Copy Control Interface Kit-C1

## Notes:

- <sup>[1]</sup> Subscription to uniFLOW Online or third party services required
- <sup>[2]</sup> Commands supported only. Third party driver or direct printing from application required.
- <sup>[3]</sup> Accessory Barcode Printing Kit-E1E - is required
- <sup>[4]</sup> Accessory - Send PDF Security Feature Set-E1 is required
- <sup>[5]</sup> Scan by MF Scan Utility or Canon PRINT Business app
- <sup>[6]</sup> Based on ITU-T Standard Chart No. 1
- <sup>[7]</sup> Web distribution only. Linux support printing only.
- <sup>[8]</sup> Duty cycle is defined as the maximum number of printed pages for a single peak month. Any usage above the recommended duty cycle may decrease the life of the product
- <sup>[9]</sup> Declared noise emission in accordance with ISO 7779. Based on ISO9296, below figure is different - Active: 62dB or less
- <sup>[10]</sup> Based on ISO/IEC 19798
- <sup>[11]</sup> As per US ENERGY STAR® version3.0.

## Software & Solutions



## Compatibility



**Canon Ireland**  
3006 Lake Drive  
Citywest, Saggart  
Co. Dublin, Ireland  
Telephone No: 01 2052400  
Facsimile No: 01 2052525  
canon.ie

**Canon (UK) Ltd**  
The Bower  
4 Roundwood Avenue  
Stockley Park  
Uxbridge  
UB11 1AF

**Canon Inc.**  
canon.com  
**Canon Europe**  
canon-europe.com  
English edition  
© Canon Europa N.V., 2022