


imageRUNNER 2600 Series

ROBUST, RELIABLE AND HIGHLY EFFICIENT A3 MONO MULTIFUNCTION PRINTERS

MAIN CONFIGURATION OPTIONS

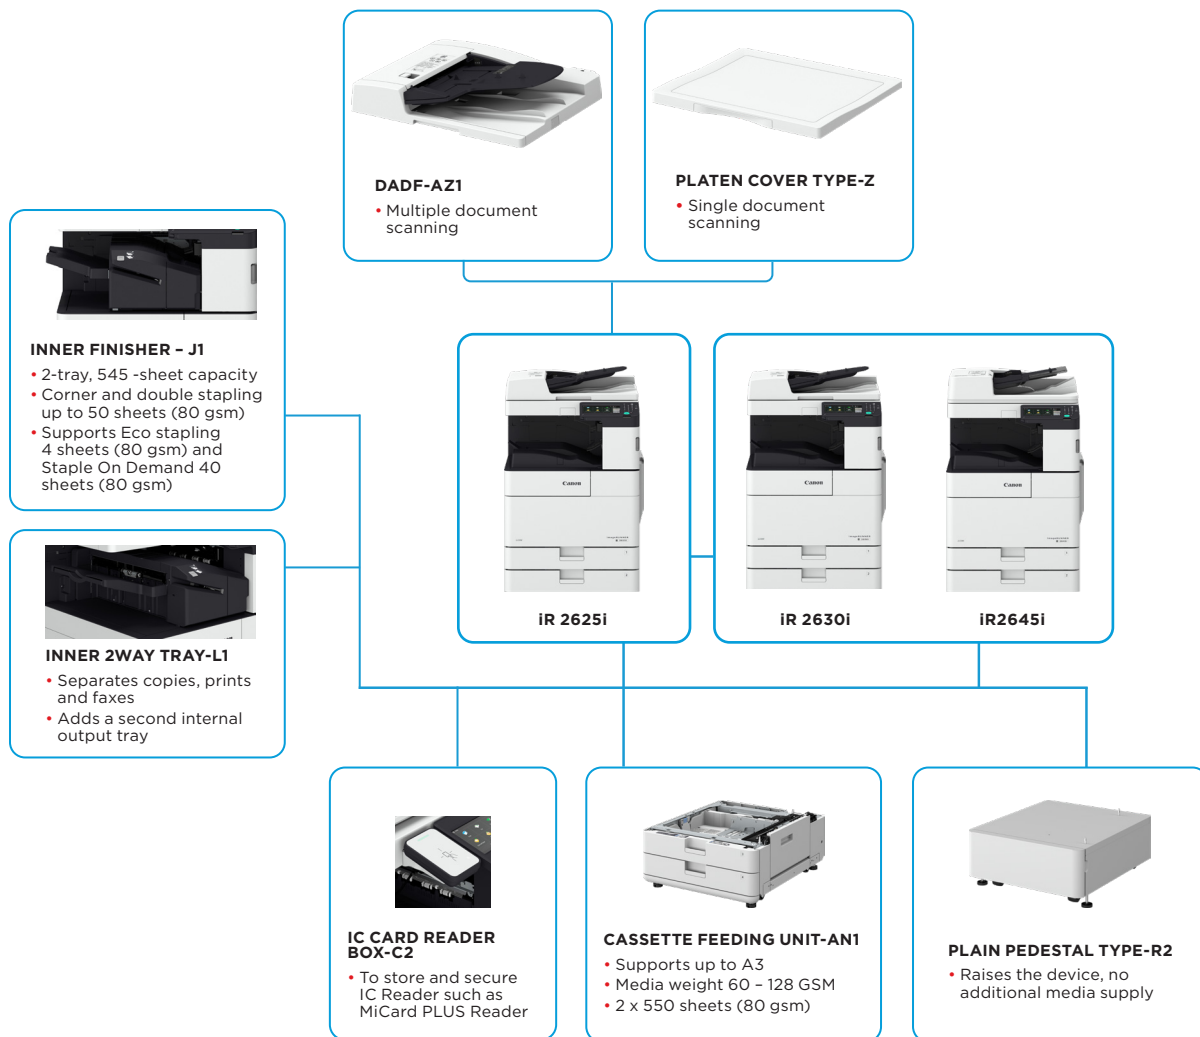

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility, please refer to the Online Product Configurator or consult your sales representative.

TECHNICAL SPECIFICATIONS

imageRUNNER 2600 Series

MAIN UNIT

Machine type	A3 Monochrome Laser Multifunctional
Core functions	Print, Copy, Scan, Send and Optional Fax
Processor	Canon Dual Custom Processor(Shared)
Control Panel	Standard: 17.8 cm/7 TFT LCD WSVGA Colour Touch panel
Memory	Standard: 2.0GB RAM
Interface Connection	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n)
	OTHERS Standard: USB 2.0 (Host) x3, USB 2.0 (Device) x1
Paper Supply Capacity (A4, 80gsm)	Standard: 1,200 sheets Maximum: 2,300 sheets (with Cassette Feeding Unit-ANI)
Paper output capacity (A4, 80gsm)	Standard: 250 sheets Maximum: 545 sheets (with Inner Finisher-J1)
Finishing Capabilities	Standard model: Collate, Group Finisher model(Inner Finisher-J1): Collate, Group, Offset, Staple-Free Staple, Staple on Demand

Supported Media Types

Paper Cassette (1/2):
Thin, Plain, Thick, Colour, Recycled, Pre-punched
Multi-purpose Tray:
Thin, Plain, Thick, Colour, Recycled, Pre-punched, Transparency, Tracing*, Label, Bond, Envelope
*Some types of tracing paper cannot be used.

Supported Media Sizes

Upper Cassette 1:
Standard size: A4, A4R, A5R, B4, B5, B5R
Custom size: Min. 139.7 x 182.0 mm up to 297.0 x 390.0 mm
Lower Cassette 2:
Standard size: A3, A4, A4R, A5R, B4, B5, B5R
Custom size: Min. 139.7 x 182.0 mm up to 297.0 x 431.8 mm

Supported Media Weights

Paper Cassettes (1/2): 60 to 128 gsm
Multi-purpose Tray: 52 to 220 gsm
(Thin: vertical grain paper feed only: 52 to 59 gsm)
Duplex: 60 to 105 gsm

Warm-up Time (With Quick Start Up Mode On)

12 seconds or less*
* Time from device power-on until copy ready (not print reservation)
From Sleep Mode: 10 seconds or less
4 seconds or less*
*Time from device power-on to when key operations can be performed on the touch panel display.

Dimensions (W x D x H)

iR 2645i: 586 x 709 x 926 mm
iR 2630i: 586 x 713 x 912 mm
iR 2625i: 586 x 713 x 912 mm (with DADF-AZ1)
586 x 700 x 818 mm (with Platen Cover type Z)

Installation Space (W x D)

iR 2645i: 1363 x 1269 mm*
iR 2630i: 1363 x 1273 mm*
iR 2625i: 1363 x 1273 mm (with DADF-AZ1)*
1363 x 1260 mm (with Platen Cover type Z)*

*with Cassette open + 100 mm gap around the main body

Weight

iR 2645i: Approx. 75.5 kg without toner
iR 2630i: Approx. 73.6 kg without toner
iR 2625i: Approx. 73.6 kg without toner (with DADF-AZ1)
Approx. 66.8 kg without toner (with Platen Cover type Z)

PRINT SPECIFICATIONS

Print Speed(BW)

iR 2645i:
45 ppm (A4), 22 ppm (A3), 32 ppm (A4R), 20ppm (A5R)
iR 2630i:
30 ppm (A4), 15 ppm (A3), 21 ppm (A4R), 17 ppm (A5R)
iR 2625i:
25 ppm (A4), 15 ppm (A3), 17 ppm (A4R), 17 ppm (A5R)

Print Resolution (dpi)

1,200 x 1,200

Page description languages

Standard: UFR II, PCL 6
Optional: Genuine Adobe PostScript Level 3

Direct Print

Direct printing available from USB memory and Remote UI.
Supported file types: PDF, EPS, TIFF, JPEG and XPS

Printing from mobile and cloud

AirPrint, Mopria, Google Cloud Print, Canon PRINT Business and uniFLOW Online
A range of software solutions is available to provide printing from mobile devices and cloud-based services depending on your requirements.
Please contact your sales representative for further information

Fonts

PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts*2
PS fonts: 136 Roman

*1 Requires optional PCL International Font Set-A1

*2 Requires optional Barcode Printing Kit-D1

Print Features

Suspend Job Timeout, Profile Settings, Secure Print, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/Orientations, Offsetting, Toner Reduction, Poster Printing, Forced Hold Printing

Operating System

UFR II: Windows* 7/8.1/10/Server 2008 /Server 2008 R2/ Server 2012/Server 2012 R2/Server 2016/Server 2019, MAC OS X (10.9 or later)

PCL: Windows* 7/8.1/10/Server 2008/Server 2008 R2/ Server 2012/Server 2012 R2/Server 2016/Server 2019

PS: Windows* 7/8.1/10/Server 2008/Server 2008 R2/ Server 2012/Server 2012 R2/Server 2016/Server 2019, MAC OS X (10.9 or later)

PPD: Windows* 7/8.1/10, MAC OS X (10.9 or later)

COPY SPECIFICATIONS

Copy Speed

iR 2645i:
45 ppm (A4), 22 ppm (A3), 32 ppm (A4R), 20ppm (A5R)

iR 2630i:

30 ppm (A4), 15 ppm (A3), 21 ppm (A4R), 17 ppm (A5R)

iR 2625i:

25 ppm (A4), 15 ppm (A3), 17 ppm (A4R), 17 ppm (A5R)

First-Copy-Out Time (A4)

iR 2645i: Approx. 3.9 seconds or less

iR 2630i/2625i: Approx. 5.9 seconds or less

Copy resolution (dpi)

Reading: 600 x 600

Printing: Up to 1,200 x 1,200

Up to 9,999 copies

Multiple Copies

Automatic or Manual (9 Levels)

Copy Density

25% - 400% (1% Increments)

Magnification

25%, 50%, 61%, 70%, 81%, 86%

Preset Reductions

115%, 122%, 141%, 200%, 400%

Preset Enlargements

Preset R/E Ratios by Area, Paper Setting, Previous Setting, Favourite Setting, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Setting Confirmation/Cancel

Basic Copy Features

Book to Two Pages, Two-sided Original, Finishing, Booklet, Job Build, N on 1, Different Size Originals, Density Adjustment, Original Type Selection, Sharpness, Erase Frame, Shift, Gutter, Job Done Notice, Copy ID Card, Free Size Original

SCAN SPECIFICATIONS

Selectable type

iR2645i: Standard Document Feeder (DADF-BA1)
iR2630i: Standard Document Feeder (DADF-AZ1)
iR2625i: Optional Document Feeder (DADF-AZ1) or Platen Cover Type Z

Document Feeder Paper Capacity (80 gsm)

DADF-BA1: 100 Sheets
DADF-AZ1: 50 Sheets

Acceptable Originals and weights

Platen (DADF-BA1):
Sheet, Book, 3-Dimensional Objects
Platen (DADF-AZ1):
Sheet, Book

Document Feeder media weight :

DADF-BA1 :

1-sided scanning: 38 to 128 gsm (BW), 64 to 128 gsm (CL)*1

2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL)

*1 Only 1-sheet feeding is supported in 38-42 gsm. (Feeding is

guaranteed but geometric distortion correction is not guaranteed)

DADF-AZ1 :

1-sided scanning: 38 to 128 gsm (BW/CL)*

2-sided scanning: 38 to 128 gsm (BW/CL)*

* Only 1-sheet feeding is supported in 38-52 and 105-128 gsm.

(Feeding is guaranteed but geometric distortion correction is not

guaranteed)

Supported media sizes

Platen: max. scanning size: 297.0 x 431.8 mm

Document Feeder media size:

DADF-BA1: A3, A4, A4R, A5, A5R, B5, B5R, B6, B4R

Custom size: 128.0 x 139.7 mm to 297.0 x 431.8 mm

DADF-AZ1: A3, A4, A4R, A5, A5R, B5, B5R, B4R

Custom size: 128.0 x 148.0 mm to 297.0 x 431.8 mm

Scan Speed (ipm: BW/CL; A4)

DADF-BA1:

1-sided Scanning: 55/55 (300 dpi), 45 (BW; 600 dpi)

2-sided Scanning: 27.5/27.5 (300 dpi), 22.5 (BW; 600 dpi)

DADF-AZ1:

1-sided Scanning: 35/25 (300 dpi), 25 (BW; 600 dpi)

2-sided Scanning: 12/8 (300 dpi), 8 (BW; 600 dpi)



TECHNICAL SPECIFICATIONS

imageRUNNER 2600 Series

Scan Resolution (dpi)	Copy: 600 x 600 Send: (Push) up to 600 x 600, (Pull) up to 600 x 600 Fax: up to 600 x 600	Data	Optional: Data Loss Prevention (Requires uniFLOW)
Pull Scan Specifications	Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows® 7/8.1/10 Windows® Server 2008/Server 2008 R2/Server 2012/ Server 2012 R2/Server 2016	Network	Standard: IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME
Scan Method	Send functionality available on all models Scan to USB Memory Key: Available on all models Scan to Mobile Devices and cloud-based services: A range of solutions is available to provide scanning to mobile devices or cloud-based services depending on your requirements. Please contact your sales representative for further information. TWAIN/WIA Pull scanning available on all models	Document	Standard: Secure Print, Encrypted PDF, Encrypted Secure Print, Device signature Optional: User signature
SEND SPECIFICATIONS		ENVIRONMENTAL SPECIFICATIONS	
Destination	E-mail/Internet FAX (SMTP), SMB, FTP, WebDAV, Super G3 FAX (Optional)	Operating Environment	Temperature: 10 to 30 °C (50 to 86 °F) Humidity: 20 to 80 % RH (Relative Humidity)
Address Book	LDAP (2,000)/Local (1,600)/Speed dial (200)	Power source	220-240 V , 50/60 Hz , 5.2 Amp
Send resolution (dpi)	Push: 600 x 600 Pull: 600 x 600, 400 x 400, 300 x 300, 200 x 200, 150 x 150, 75 x 75	Plug (Main Unit)	CEE7/7
Communication protocol	File: FTP (TCP/IP), SMB (TCP/IP), WebDAV E-mail/I-Fax: SMTP (send), POP3 (receive)	Power consumption	Maximum: Approx. 1500W Standby: Approx. 20W Sleep mode: Approx. 1.0W Plugin Off: Approx. 0.4W Typical Electricity Consumption (TEC)* :
File Format	Standard: TIFF (MMR), JPEG*, PDF (Compact, Searchable, PDF A/1-b, Encrypted), XPS (Compact, Searchable), PDF/XPS (Device Signature), Office Open XML (PowerPoint, Word) Optional: PDF (Trace & Smooth), PDF/XPS (User Signature) *Single page only	Noise levels (BW/CL)	iR 2645i: 0.69 kWh iR 2630i: 0.45 kWh iR 2625i: 0.38 kWh *As per US ENERGY STAR® version 3.0 Sound Power Level (LwAd) Active: iR 2645i: 73.1 dB or Less*1 iR 2630i: 71.0 dB or Less*1 iR 2625i: 70.2 dB or Less*1 Standby: No noise*2 No noise means that the emission sound pressure level of each bystander position is lower than the absolute standard with the background noise of ISO 7779.
Universal Send Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Erase Frame, Job Build, Sender's Name (TTI), Direct Send, Delayed Send, Preview, Finished Stamp, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation		Sound Pressure Level (LpAm) (Reference) Bystander's position: Active: iR 2645i: 1-sided: LpAm 52 dB, 2-sided: LpAm 55 dB iR 2630i: 1-sided: LpAm 50 dB, 2-sided: LpAm 53 dB iR 2625i: 1-sided: LpAm 50 dB, 2-sided: LpAm 52 dB Standby: No noise*2 (Reference) No noise means that the emission sound pressure level of each bystander position is lower than the absolute standard with the background noise of ISO 7779.
FAX SPECIFICATIONS		Standards	*1 RAL-UZ205(2017) compliant (Data taken from Blue Angel Standard value) *2 Reference value: measured only one unit with ISO7779, described with ISO9296:2017 Blue Angel
Optional/ standard	Optional on all models	CONSUMABLES	
Maximum Number of Connection Lines	1	Toner Cartridge/s	C-EXV 59 Toner Black
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps	Toner (Estimated Yield @ 6% Coverage)	Black: 30,000 impressions (A4)
Compression Method	MH, MR, MMR, JBIG	SOFTWARE AND PRINTER MANAGEMENT	
Resolution (dpi)	400 x 400 (ultrafine), 200 x 400 (superfine), 200 x 200 (fine/photo), 200 x 100 (normal)	Tracking and reporting	Universal Login Manager (ULM): Manage your costs easily by using the embedded reporting capability to identify and control costs on a user-based level by device. uniFLOW Online Express*: Combining with ULM you can gain further control and highlight expenditures per users/department and pinpoint where costs can be scaled down from a central cloud based location. *Installation, activation and registration required
Sending/Recording Size	A3, A4, A4R, A5*, A5R*1, B4, B5*2, B5R*1 *1 Sent as A4 *2 Sent as B4		
FAX memory	Up to 30,000 pages		
Speed dials	Max. 200		
Group dials/destinations	Max. 199 dials		
Sequential broadcast	Max. 256 addresses		
Memory backup	Yes		
Fax Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density (for Scanning), Sharpness, Erase Frame, Job Build, Sender's Name (TTI), Direct Send, Delayed Send, Preview, Finished Stamp, Job Done Notice, TX Report		
STORE SPECIFICATION			
Memory Media	Standard: USB Memory		
SECURITY SPECIFICATIONS			
Authentication	Standard: Universal Login Manager (Device and Function Level Log-in), uniFLOW Online Express*, User Authentication, Department ID Authentication, Access Management System Optional: My Print Anywhere secure print (Requires uniFLOW), Picture Login *No charge for this solution; however activation is required.		

TECHNICAL SPECIFICATIONS

imageRUNNER 2600 Series

Remote management tools	<p>iW Management Console: Server-based software for centralised management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware applications, meter capture and reporting, driver and resource management)</p> <p>eMaintenance: Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance)</p> <p>Content Delivery System: Allows the Remote distribution of firmware, iR options; Remote User Interface (RUI) Web based interface to each device that helps to provide remote device management and control</p>	SECURITY OPTIONS	Picture Login-A1
Scanning software	<p>Network ScanGear: TWAIN-compliant scanner driver that enables computers on a network to use the pull scan functionality of the device</p>	DATA SECURITY	
PAPER SUPPLY OPTIONS CASSETTE FEEDING UNIT-ANI	<p>Paper Capacity: 550 sheets x 2 (80 gsm) Paper Type: Thin, Plain, Thick, Colour, Recycled, Pre-punched Paper Size: A3, A4, A4R, A5R, B4, B5, B5R, Custom size: 139.7 x 182.0 mm to 297.0 x 431.8 mm Paper Weight: 60 to 128 gsm Power Source: From the Main Unit Dimensions (W x D x H): 565 x 650 x 248 mm (attached to the main unit) Weight: Approx. 23.5 kg</p>	SYSTEM AND CONTROLLER OPTIONS PRINT ACCESSORIES	PCL INTERNATIONAL FONT SET-A1 - Adds PCL support for Andalé Mono WT J/K/S/T (Japanese/Korean/Simplified Chinese/Traditional Chinese).
ENVELOP FEEDER ATTACHMENT-D1	<p>Attaches to the 2nd paper drawer for easy envelope feeding. Holds up to 50 envelopes.</p>	PS PRINTER KIT-BT1-	Provides networked printing support for Adobe PostScript 3 printing.
OUTPUT OPTIONS INNER 2WAY TRAY-L1	<p>Allows the separation of copies, prints and faxes. Adds a second internal output tray to give a combined output capacity of 350 sheets (upper tray 100 sheets/lower tray 250 sheets).</p>	BARCODE PRINTING	BARCODE PRINTING KIT-D1 - Provides the ability to print 1D and 2D barcodes on output using jet caps technology.
INNER FINISHER-J1 (Internal)	<p>Number of Trays: 2 Upper Tray Capacity*: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R: 45 sheets Lower Tray Capacity*: A4, A5, A5R, B5: 500 sheets, A3, A4R, B4, B5R: 250sheets, A6R: 30 sheets *with 81.4 gsm paper Paper Weight: 52 to 220 gsm Staple Position: Corner, Double Staple Capacity: Corner and Double Stapling: A4/B5: 50 sheets (52 to 90 gsm) A3/A4R/B4: 30 sheets (52 to 90 gsm) Eco Staple: A3/A4/B4/B5: 5 sheets (52 to 64 gsm) 4 sheets (65 to 81.4 gsm) 3 sheets (81.5 to 105 gsm) Staple On Demand: 40 sheets (80 gsm) Dimensions (W x D x H): 604 x 535 x 205 mm (when the extension tray is extended) Weight: Approx. 7.3 kg</p>	SYSTEM ACCESSORIES	COPY CONTROL INTERFACE KIT-D1: Allows connection (CCVI I/F) between 3rd party copy control terminal and Canon's iR-ADV range for cost recovery use.
HARDWARE ACCESSORIES CARD READERS	<p>COPY CARD READER-F1 - Magnetic physical card access system. (Integrates with Department ID, not for use with uniFLOW)</p>	FAX ACCESSORIES	SUPER G3 FAX BOARD-AV2
OTHERS	<p>IC Card Reader Box-C2 COPY CARD READER ATTACHMENT-H3 - Attachment kit for Copy Card Reader-F1 only. CASSETTE LOCK TYPE-F1 - Security accessory which protects the cassette trays from being opened (Available in selected markets only) PLATEN COVER TYPE Z DADF-AZ1</p>	OTHER OPTIONS ACCESSIBILITY ACCESSORIES	ADF ACCESS HANDLE-A1 - Attaches to the document feeder, making access easier for seated users.
		STAPLE CARTRIDGE	STAPLE-P1 - For stapling (2 x 5,000 pcs)

imageRUNNER 2600 Series

PRODUCT DETAILS:

PRODUCT NAME	MERCURY CODE	EAN CODE
imageRUNNER 2645i MFP	3811C004AA	4549292151077
imageRUNNER 2630i MFP	3809C004AA	4549292150995
imageRUNNER 2625i MFP	3808C004AA	4549292150926

OPTIONAL ACCESSORIES:

PRODUCT NAME	MERCURY CODE	EAN CODE
Document Feeder/Reader Option		
DADF-AZ1	3812C001AA	4549292152173
Platen Cover Type Z	3817C001AA	4549292152197
ADF Access Handle-A1	1095B001AA	4960999354736
Network Option		
PS Printer Kit-BT1@E	3821C001AA	N/A
Barcode Printing Kit-D1@E	3999B005AA	N/A
PCL International Font Set-A1@E	4821B003AA	N/A
Send/FAX		
Super G3 FAX Board-AV2	1633C007AA	4549292152968
Remote Fax Kit-A1@E	3679B005AA	N/A
Universal Send Digital User Signature Kit-C1@E	1326B013AA	N/A
Universal Send Trace & Smooth PDF Kit-A1@E	8581B004AA	N/A
Paper Supply Option		
Cassette Feeding Unit-AN1	1419C002AA	4549292065459
Envelope Feeder Attachment-D1	3665B001AB	4960999650746
Plain Pedestal Type-R2	2290C002AA	8714574655666
Cassette Lock Type-F1	3250V814	8714574659220
Output Option		
Inner Finisher-J1	1423C002AA	4549292065534
Inner 2Way Tray-L1	1422C001AA	4549292065510
Staple-P1	1008B001AB	4960999351100

imageRUNNER 2600 Series

OPTIONAL ACCESSORIES:

PRODUCT NAME	MERCURY CODE	EAN CODE
Other Option		
IC Card Reader Box-C2	0625C002AA	4549292152234
Copy Card Reader Attachment-H3	9897B003AA	4549292152944
Copy Card Reader-F1	4784B001AA	4960999679686
Copy Control Interface Kit-D1	1640C001AA	4549292088281
Heater Kit-N2	1710C004AA	4549292152166
Cassette Heater Unit-37	3666B001BA	4960999654362
DCS- Device Centric Software		
MiCard PLUS for ULM	8418B001AA	8714574592169
UFMifare10CardPack	8418B002AA	8714574592176
UFHID10 CardPack	8418B003AA	8714574592183
Consumables		
C-EXV 59 Toner Black	3760C002AA	4549292145793

Software & Solutions



Compatibility



Canon Inc.
canon.com
Canon Europe
canon-europe.com
English edition
© Canon Europa N.V., 2019