


# imageRUNNER 2600 Series

## ROBUST, RELIABLE AND HIGHLY EFFICIENT A3 MONO MULTIFUNCTION PRINTERS

### MAIN CONFIGURATION OPTIONS

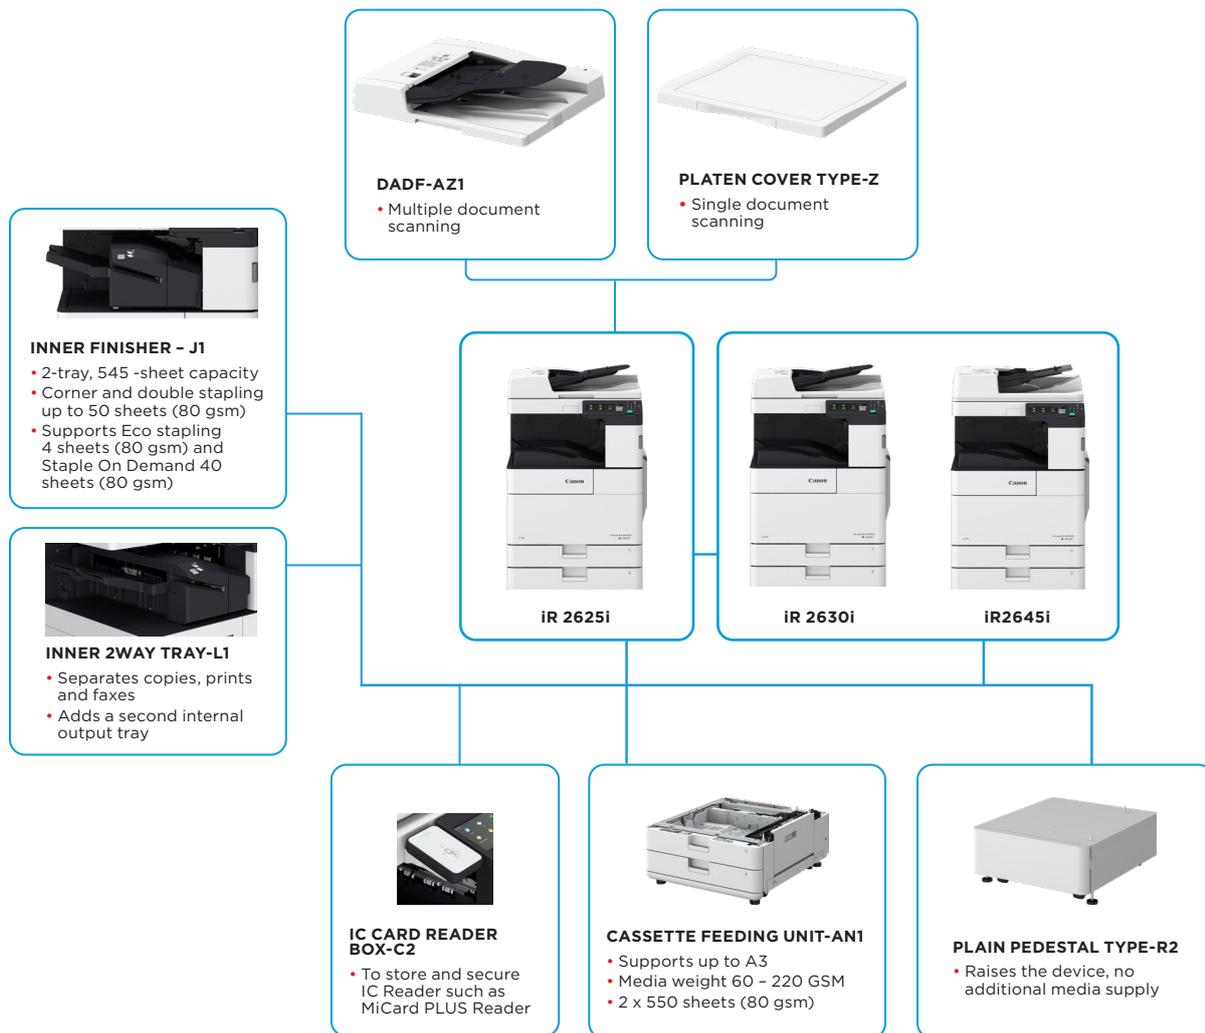

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility, please refer to the Online Product Configurator or consult your sales representative.

# TECHNICAL SPECIFICATIONS

# imageRUNNER 2600 Series

## MAIN UNIT

Machine type	A3 Monochrome Laser Multifunctional
Core functions	Print, Copy, Scan, Send and Optional Fax
Processor	Canon Dual Custom Processor(Shared)
Control Panel	Standard: 17.8 cm/7 TFT LCD WSVGA Colour Touch panel
Memory	Standard: 2.0GB RAM
Storage	Standard: 64GB eMMC (available space 30GB)
Interface Connection	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n)

Paper Supply Capacity (A4, 80gsm)	Standard: 1,200 sheets Maximum: 2,300 sheets (with Cassette Feeding Unit-ANI)
Paper output capacity (A4, 80gsm)	Standard: 250 sheets Maximum: 545 sheets (with Inner Finisher-J1)
Finishing Capabilities	Standard model: Collate, Group Finisher model(Inner Finisher-J1): Collate, Group, Offset, Staple-Free Staple, Staple on Demand

Supported Media Types	Paper Cassette (1/2): Thin, Plain, Thick, Colour, Recycled, Pre-punched Multi-purpose Tray: Thin, Plain, Thick, Colour, Recycled, Pre-punched, Transparency, Tracing*, Label, Bond, Envelope *Some types of tracing paper cannot be used.
Supported Media Sizes	Upper Cassette 1: Standard size: A4, A4R, A5R, B4, B5, B5R Custom size: Min. 139.7 x 182.0 mm up to 297.0 x 390.0 mm Lower Cassette 2: Standard size: A3, A4, A4R, A5R, B4, B5, B5R Custom size: Min. 139.7 x 182.0 mm up to 297.0 x 431.8 mm Multi-purpose tray: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Envelopes [No. 10(COM 10), Monarch, ISO-C5, DL] Custom Size/Free Size: Min. 98.0 x 148.0 to 297.0 x 431.8 mm

Supported Media Weights	Paper Cassettes (1/2): 60 to 220 gsm Multi-purpose Tray: 52 to 220 gsm (Thin: vertical grain paper feed only: 52 to 59 gsm) Duplex: 60 to 105 gsm
Warm-up Time (With Quick Start Up Mode On)	12 seconds or less * * Time from device power-on until copy ready (not print reservation) From Sleep Mode: 10 seconds or less 4 seconds or less* *Time from device power-on to when key operations can be performed on the touch panel display.

Dimensions (W x D x H)	iR 2645i: 586 x 709 x 926 mm iR 2630i: 586 x 713 x 912 mm iR 2625i: 586 x 713 x 912 mm (with DADF-AZ1) 586 x 700 x 818 mm (with Platen Cover type Z)
Installation Space (W x D)	iR 2645i: 1363 x 1269 mm* iR 2630i: 1363 x 1273 mm* iR 2625i: 1363 x 1273 mm (with DADF-AZ1)* 1363 x 1260 mm (with Platen Cover type Z)* *with Cassette open + 100 mm gap around the main body
Weight	iR 2645i: Approx. 75.5 kg without toner iR 2630i: Approx. 73.6 kg without toner iR 2625i: Approx. 73.6 kg without toner (with DADF-AZ1) Approx. 66.8 kg without toner (with Platen Cover type Z)

Supported Media Weights	Paper Cassettes (1/2): 60 to 220 gsm Multi-purpose Tray: 52 to 220 gsm (Thin: vertical grain paper feed only: 52 to 59 gsm) Duplex: 60 to 105 gsm
-------------------------	--

Warm-up Time (With Quick Start Up Mode On)	12 seconds or less * * Time from device power-on until copy ready (not print reservation) From Sleep Mode: 10 seconds or less 4 seconds or less* *Time from device power-on to when key operations can be performed on the touch panel display.
--	---

Dimensions (W x D x H)	iR 2645i: 586 x 709 x 926 mm iR 2630i: 586 x 713 x 912 mm iR 2625i: 586 x 713 x 912 mm (with DADF-AZ1) 586 x 700 x 818 mm (with Platen Cover type Z)
Installation Space (W x D)	iR 2645i: 1363 x 1269 mm* iR 2630i: 1363 x 1273 mm* iR 2625i: 1363 x 1273 mm (with DADF-AZ1)* 1363 x 1260 mm (with Platen Cover type Z)* *with Cassette open + 100 mm gap around the main body
Weight	iR 2645i: Approx. 75.5 kg without toner iR 2630i: Approx. 73.6 kg without toner iR 2625i: Approx. 73.6 kg without toner (with DADF-AZ1) Approx. 66.8 kg without toner (with Platen Cover type Z)

## PRINT SPECIFICATIONS

Print Speed(BW)	iR 2645i: 45 ppm (A4), 22 ppm (A3), 32 ppm (A4R), 20ppm (A5R) iR 2630i: 30 ppm (A4), 15 ppm (A3), 21 ppm (A4R), 17 ppm (A5R) iR 2625i: 25 ppm (A4), 15 ppm (A3), 17 ppm (A4R), 17 ppm (A5R)
Print Resolution (dpi)	1,200 x 1,200
Page description languages	Standard: UFR II, PCL 6 Optional: Genuine Adobe PostScript Level 3
Direct Print	Direct printing available from USB memory and Remote UI. Supported file types: PDF, EPS,TIFF, JPEG and XPS

## Printing from mobile and cloud

## Fonts

## Print Features

## Operating System

## COPY SPECIFICATIONS

### Copy Speed

### First-Copy-Out Time (A4)

### Copy resolution (dpi)

### Multiple Copies

### Copy Density

### Magnification

### Preset Reductions

### Preset Enlargements

### Basic Copy Features

### Special Copy Features

## SCAN SPECIFICATIONS

### Selectable type

### Document Feeder Paper Capacity (80 gsm)

### Acceptable Originals and weights

### Supported media sizes

AirPrint, Mopria, Google Cloud Print, Canon PRINT Business and uniFLOW Online  
A range of software solutions is available to provide printing from mobile devices and cloud-based services depending on your requirements.  
Please contact your sales representative for further information

PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T<sup>1</sup> (Japanese, Korean, Simplified and Traditional Chinese) , Barcode fonts<sup>2</sup>  
PS fonts: 136 Roman

<sup>1</sup> Requires optional PCL International Font Set-A1

<sup>2</sup> Requires optional Barcode Printing Kit-D1

Suspend Job Timeout, Profile Settings, Secure Print, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/Orientations, Offsetting, Toner Reduction, Poster Printing, Forced Hold Printing

UFR II: Windows\* 7/8.1/10/Server 2008 /Server 2008 R2/ Server 2012/Server 2012 R2/Server 2016/Server 2019, MAC OS X (10.9 or later)

PCL: Windows\* 7/8.1/10/Server 2008/Server 2008 R2/ Server 2012/Server 2012 R2/Server 2016/Server 2019

PS: Windows\* 7/8.1/10/Server 2008/Server 2008 R2/ Server 2012/Server 2012 R2/Server 2016/Server 2019, MAC OS X (10.9 or later)

PPD: Windows\* 7/8.1/10, MAC OS X (10.9 or later)

iR 2645i:  
45 ppm (A4), 22 ppm (A3), 32 ppm (A4R), 20ppm (A5R)

iR 2630i:  
30 ppm (A4), 15 ppm (A3), 21 ppm (A4R), 17 ppm (A5R)

iR 2625i:  
25 ppm (A4), 15 ppm (A3), 17 ppm (A4R), 17 ppm (A5R)

iR 2645i: Approx. 3.9 seconds or less

iR 2630i/2625i: Approx. 5.9 seconds or less

Reading: 600 x 600

Printing: Up to 1,200 x 1,200

Up to 9,999 copies

Automatic or Manual (9 Levels)

25% - 400% (1% Increments)

25%, 50%, 61%, 70%, 81%, 86%

115%, 122%, 141%, 200%, 400%

Preset R/E Ratios by Area, Paper Setting, Previous Setting, Favourite Setting, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Setting Confirmation/Cancel

Book to Two Pages, Two-sided Original, Finishing, Booklet, Job Build, N on 1, Different Size Originals, Density Adjustment, Original Type Selection, Sharpness, Erase Frame, Shift, Gutter, Job Done Notice, Copy ID Card, Free Size Original

iR2645i: Standard Document Feeder (DADF-BA1)

iR2630i: Standard Document Feeder (DADF-AZ1)

iR2625i: Optional Document Feeder (DADF-AZ1)

or Platen Cover Type Z

DADF-BA1: 100 Sheets

DADF-AZ1: 50 Sheets

Platen (DADF-BA1):

Sheet, Book, 3-Dimensional Objects

Platen (DADF-AZ1):

Sheet, Book

Document Feeder media weight :

DADF-BA1 :

1-sided scanning: 38 to 128 gsm (BW), 64 to 128 gsm (CL)\*<sup>1</sup>

2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL)

<sup>1</sup> Only 1-sheet feeding is supported in 38-42 gsm. (Feeding is guaranteed but geometric distortion correction is not guaranteed)

DADF-AZ1 :

1-sided scanning: 38 to 128 gsm (BW/CL)\*

2-sided scanning: 38 to 128 gsm (BW/CL)\*

<sup>1</sup> Only 1-sheet feeding is supported in 38-52 and 105-128 gsm.

(Feeding is guaranteed but geometric distortion correction is not guaranteed)

Platen: max. scanning size: 297.0 x 431.8 mm

Document Feeder media size:

DADF-BA1: A3, A4, A4R, A5, A5R, B5, B5R, B6, B4R

Custom size: 128.0 x 139.7 mm to 297.0 x 431.8 mm

DADF-AZ1: A3, A4, A4R, A5, A5R, B5, B5R, B4R

Custom size: 128.0 x 148.0 mm to 297.0 x 431.8 mm

# TECHNICAL SPECIFICATIONS

# imageRUNNER 2600 Series

<b>Scan Speed (ipm: BW/CL; A4)</b>	DADF-BA1: 1-sided Scanning: 55/55 (300 dpi), 45 (BW; 600 dpi) 2-sided Scanning: 27.5/27.5 (300 dpi), 22.5 (BW; 600 dpi) DADF-AZ1: 1-sided Scanning: 35/25 (300 dpi), 25 (BW; 600 dpi) 2-sided Scanning: 12/8 (300 dpi), 8 (BW; 600 dpi)	<b>Data</b>	Optional: Data Loss Prevention (Requires uniFLOW)
<b>Scan Resolution (dpi)</b>	Copy: 600 x 600 Send: (Push) up to 600 x 600, (Pull) up to 600 x 600 Fax: up to 600 x 600	<b>Network</b>	Standard: IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME
<b>Pull Scan Specifications</b>	Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows® 7/8.1/10 Windows® Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016	<b>Document</b>	Standard: Secure Print, Encrypted PDF, Encrypted Secure Print, Device signature Optional: User signature
<b>Scan Method</b>	Send functionality available on all models  Scan to USB Memory Key: Available on all models Scan to Mobile Devices and cloud-based services: A range of solutions is available to provide scanning to mobile devices or cloud-based services depending on your requirements. Please contact your sales representative for further information.  TWAIN/WIA Pull scanning available on all models	<b>ENVIRONMENTAL SPECIFICATIONS</b>	
<b>SEND SPECIFICATIONS</b>		<b>Operating Environment</b>	Temperature: 10 to 30 °C (50 to 86 °F) Humidity: 20 to 80 % RH (Relative Humidity)
<b>Destination</b>	E-mail/Internet FAX (SMTP), SMB, FTP, WebDAV, Super G3 FAX (Optional)	<b>Power source</b>	220-240 V , 50/60 Hz , 5.2 Amp
<b>Address Book</b>	LDAP (2,000)/Local (1,600)/Speed dial (200)	<b>Plug (Main Unit)</b>	CEE7/7
<b>Send resolution (dpi)</b>	Push: 600 x 600 Pull: 600 x 600, 400 x 400, 300 x 300, 200 x 200, 150 x 150, 75 x 75	<b>Power consumption</b>	Maximum: Approx. 1500W Standby: Approx. 20W Sleep mode: Approx. 1W Plugin Off: Approx. 0.4W
<b>Communication protocol</b>	File: FTP (TCP/IP), SMB (TCP/IP), WebDAV E-mail/I-Fax: SMTP (send), POP3 (receive)	<b>Noise levels (BW/CL)</b>	Typical Electricity Consumption (TEC)* : iR 2645i: 0.69 kWh iR 2630i: 0.45 kWh iR 2625i: 0.38 kWh  *As per US ENERGY STAR® version 3.0
<b>File Format</b>	Standard: TIFF (MMR), JPEG*, PDF (Compact, Searchable, PDF A/1-b, Encrypted), XPS (Compact, Searchable), PDF/XPS (Device Signature), Office Open XML (PowerPoint, Word) Optional: PDF (Trace & Smooth), PDF/XPS (User Signature) *Single page only		Sound Power Level (LwAd) Active: iR 2645i: 73.1 dB or Less** iR 2630i: 71.0 dB or Less** iR 2625i: 70.2 dB or Less**  Standby: No noise** No noise means that the emission sound pressure level of each bystander position is lower than the absolute standard with the background noise of ISO 7779.
<b>Universal Send Features</b>	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Erase Frame, Job Build, Sender's Name (TTI), Direct Send, Delayed Send, Preview, Finished Stamp, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation		Sound Pressure Level (LpAm) (Reference) Bystander's position: Active: iR 2645i: 1-sided: LpAm 52 dB, 2-sided: LpAm 55 dB iR 2630i: 1-sided: LpAm 50 dB, 2-sided: LpAm 53 dB iR 2625i: 1-sided: LpAm 50 dB, 2-sided: LpAm 52 dB  Standby: No noise** (Reference) No noise means that the emission sound pressure level of each bystander position is lower than the absolute standard with the background noise of ISO 7779.
<b>FAX SPECIFICATIONS</b>		<b>Standards</b>	*1 RAL-UZ205(2017) compliant (Data taken from Blue Angel Standard value) *2 Reference value: measured only one unit with ISO7779, described with ISO9296:2017
<b>Optional/ standard</b>	Optional on all models		Blue Angel
<b>Maximum Number of Connection Lines</b>	1	<b>CONSUMABLES</b>	
<b>Modem Speed</b>	Super G3: 33.6 kbps G3: 14.4 kbps	<b>Toner Cartridge/s</b>	C-EXV 59 Toner Black
<b>Compression Method</b>	MH, MR, MMR, JBIG	<b>Toner (Estimated Yield @ 6% Coverage)</b>	Black: 30,000 impressions (A4)
<b>Resolution (dpi)</b>	400 x 400 (ultrafine), 200 x 400 (superfine), 200 x 200 (fine/photo), 200 x 100 (normal)	<b>SOFTWARE AND PRINTER MANAGEMENT</b>	
<b>Sending/Recording Size</b>	A3, A4, A4R, A5*, A5R*, B4, B5*, B5R* *1 Sent as A4 *2 Sent as B4	<b>Tracking and reporting</b>	Universal Login Manager (ULM): Manage your costs easily by using the embedded reporting capability to identify and control costs on a user-based level by device. uniFLOW Online Express*: Combining with ULM you can gain further control and highlight expenditures per users/department and pinpoint where costs can be scaled down from a central cloud based location. *Installation, activation and registration required
<b>FAX memory</b>	Up to 30,000 pages		
<b>Speed dials</b>	Max. 200		
<b>Group dials/destinations</b>	Max. 199 dials		
<b>Sequential broadcast</b>	Max. 256 addresses		
<b>Memory backup</b>	Yes		
<b>Fax Features</b>	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density (for Scanning), Sharpness, Erase Frame, Job Build, Sender's Name (TTI), Direct Send, Delayed Send, Preview, Finished Stamp, Job Done Notice, TX Report		
<b>STORE SPECIFICATION</b>			
<b>Memory Media</b>	Standard: USB Memory		
<b>SECURITY SPECIFICATIONS</b>			
<b>Authentication</b>	Standard: Universal Login Manager (Device and Function Level Log-in), uniFLOW Online Express*, User Authentication, Department ID Authentication, Access Management System Optional: My Print Anywhere secure print (Requires uniFLOW), Picture Login *No charge for this solution; however activation is required.		



# TECHNICAL SPECIFICATIONS

# imageRUNNER 2600 Series

<b>Remote management tools</b>	<p>iW Management Console: Server-based software for centralised management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware applications, meter capture and reporting, driver and resource management)</p> <p>eMaintenance: Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance)</p> <p>Content Delivery System: Allows the Remote distribution of firmware, iR options; Remote User Interface (RUI) Web based interface to each device that helps to provide remote device management and control</p>	<b>SECURITY OPTIONS</b>	Picture Login-A1
<b>Scanning software</b>	<p>Network ScanGear: TWAIN-compliant scanner driver that enables computers on a network to use the pull scan functionality of the device</p>	<b>DATA SECURITY</b>	
<b>PAPER SUPPLY OPTIONS</b>	<p>Paper Capacity: 550 sheets x 2 (80 gsm)            Paper Type: Thin, Plain, Thick, Colour, Recycled, Pre-punched            Paper Size: A3, A4, A4R, A5R, B4, B5, B5R, Custom size: 139.7 x 182.0 mm to 297.0 x 431.8 mm            Paper Weight: 60 to 220 gsm            Power Source: From the Main Unit            Dimensions (W x D x H): 565 x 650 x 248 mm (attached to the main unit)            Weight: Approx. 23.5 kg</p>	<b>SYSTEM AND CONTROLLER OPTIONS</b>	PCL INTERNATIONAL FONT SET-A1 - Adds PCL support for Andalé Mono WT J/K/S/T (Japanese/Korean/Simplified Chinese/Traditional Chinese).
<b>CASSETTE FEEDING UNIT-ANI</b>		<b>PRINT ACCESSORIES</b>	PS PRINTER KIT-BT1- Provides networked printing support for Adobe PostScript 3 printing.
<b>ENVELOP FEEDER ATTACHMENT-D1</b>	<p>Attaches to the 2nd paper drawer for easy envelope feeding. Holds up to 50 envelopes.</p>	<b>BARCODE PRINTING</b>	BARCODE PRINTING KIT-D1 - Provides the ability to print 1D and 2D barcodes on output using jet caps technology.
<b>OUTPUT OPTIONS</b>		<b>SYSTEM ACCESSORIES</b>	COPY CONTROL INTERFACE KIT-D1: Allows connection (CCVI I/F) between 3rd party copy control terminal and Canon's iR-ADV range for cost recovery use.
<b>INNER 2WAY TRAY-L1</b>	<p>Allows the separation of copies, prints and faxes. Adds a second internal output tray to give a combined output capacity of 350 sheets (upper tray 100 sheets/lower tray 250 sheets).</p>	<b>FAX ACCESSORIES</b>	SUPER G3 FAX BOARD-AV2
<b>INNER FINISHER-J1 (Internal)</b>	<p>Number of Trays: 2            Upper Tray Capacity*: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R: 45 sheets            Lower Tray Capacity*: A4, A5, A5R, B5: 500 sheets, A3, A4R, B4, B5R: 250sheets, A6R: 30 sheets            *with 81.4 gsm paper            Paper Weight: 52 to 220 gsm            Staple Position: Corner, Double            Staple Capacity: Corner and Double Stapling: A4/B5: 50 sheets (52 to 90 gsm) A3/A4R/B4: 30 sheets (52 to 90 gsm)            Eco Staple:            A3/A4/B4/B5: 5 sheets (52 to 64 gsm) 4 sheets (65 to 81.4 gsm) 3 sheets (81.5 to 105 gsm)            Staple On Demand:            40 sheets (80 gsm)            Dimensions (W x D x H): 604 x 535 x 205 mm (when the extension tray is extended)            Weight: Approx. 7.3 kg</p>	<b>OTHER OPTIONS</b>	REMOTE FAX KIT-A1 - Enables the device to send and receive fax from another device connected with a fax board.
<b>HARDWARE ACCESSORIES</b>		<b>ACCESSIBILITY ACCESSORIES</b>	ADF ACCESS HANDLE-A1 - Attaches to the document feeder, making access easier for seated users.
<b>CARD READERS</b>	<p>COPY CARD READER-F1 - Magnetic physical card access system. (Integrates with Department ID, not for use with uniFLOW)</p> <p>IC Card Reader Box-C2</p>	<b>STAPLE CARTRIDGE</b>	STAPLE-P1 - For stapling (2 x 5,000 pcs)
<b>COPY CARD READER ATTACHMENT-H3 - Attachment kit for Copy Card Reader-F1 only.</b>			
<b>CASSETTE LOCK TYPE-F1 - Security accessory which protects the cassette trays from being opened (Available in selected markets only)</b>			
<b>PLATEN COVER TYPE Z</b>			
<b>DADF-AZ1</b>			
<b>OTHERS</b>			



# imageRUNNER 2600 Series

## PRODUCT DETAILS:

PRODUCT NAME	MERCURY CODE	EAN CODE
imageRUNNER 2645i MFP	3811C004AA	4549292151077
imageRUNNER 2630i MFP	3809C004AA	4549292150995
imageRUNNER 2625i MFP	3808C004AA	4549292150926

## OPTIONAL ACCESSORIES:

PRODUCT NAME	MERCURY CODE	EAN CODE
<b>Document Feeder/Reader Option</b>		
DADF-AZ1	3812C001AA	4549292152173
Platen Cover Type Z	3817C001AA	4549292152197
ADF Access Handle-A1	1095B001AA	4960999354736
<b>Network Option</b>		
PS Printer Kit-BT1@E	3821C001AA	N/A
Barcode Printing Kit-D1@E	3999B005AA	N/A
PCL International Font Set-A1@E	4821B003AA	N/A
<b>Send/FAX</b>		
Super G3 FAX Board-AV2	1633C007AA	4549292152968
Remote Fax Kit-A1@E	3679B005AA	N/A
Universal Send Digital User Signature Kit-C1@E	1326B013AA	N/A
Universal Send Trace & Smooth PDF Kit-A1@E	8581B004AA	N/A
<b>Paper Supply Option</b>		
Cassette Feeding Unit-AN1	1419C002AA	4549292065459
Envelope Feeder Attachment-D1	3665B001AB	4960999650746
Plain Pedestal Type-R2	2290C002AA	8714574655666
Cassette Lock Type-F1	3250V814	8714574659220
<b>Output Option</b>		
Inner Finisher-J1	1423C002AA	4549292065534
Inner 2Way Tray-L1	1422C001AA	4549292065510
Staple-P1	1008B001AB	4960999351100

# imageRUNNER 2600 Series

## OPTIONAL ACCESSORIES:

PRODUCT NAME	MERCURY CODE	EAN CODE
<b>Other Option</b>		
IC Card Reader Box-C2	0625C002AA	4549292152234
Copy Card Reader Attachment-H3	9897B003AA	4549292152944
Copy Card Reader-F1	4784B001AA	4960999679686
Copy Control Interface Kit-D1	1640C001AA	4549292088281
Heater Kit-N2	1710C004AA	4549292152166
Cassette Heater Unit-37	3666B001BA	4960999654362
<b>DCS- Device Centric Software</b>		
MiCard PLUS for ULM	8418B001AA	8714574592169
UFMifare10CardPack	8418B002AA	8714574592176
UFHID10 CardPack	8418B003AA	8714574592183
<b>Consumables</b>		
C-EXV 59 Toner Black	3760C002AA	4549292145793

## Software & Solutions



## Compatibility



Canon Inc.  
canon.com  
Canon Europe  
canon-europe.com  
English edition  
© Canon Europa N.V., 2019