

# THE ULTIMATE ENTRY LEVEL A3 BLACK AND WHITE MULTIFUNCTION PRINTER FOR CORE OFFICE NEEDS.

Black and white A3 multifunction printers ideal for small workgroups needing reliable high-quality printing and scanning.

## imageFORCE 4000 Series



### BOOST PRODUCTIVITY

Work faster with rapid start-up, and rock-solid reliability to help teams keep business moving. Compatibility with uniFLOW Online ensures seamless connectivity to workflows

### SMOOTH USER EXPERIENCE

Simple, intuitive and quiet. Helping everyone get more done with clear on-screen steps, easy controls and a smart preview that shows your print exactly as it will appear - no surprises.

### RELIABLE, PROACTIVE SECURITY


Guard every document with 360° protection, AI-driven security settings and strong authentication. Your data stays encrypted, your devices stay defended, and your teams stay confidently productive.

### MEET SUSTAINABILITY TARGETS

Reduced power consumption, long-life components and recycled materials make every print a smarter choice for your business – and a lighter one for the planet.

# imageFORCE 4000 Series

## MAIN CONFIGURATION OPTIONS

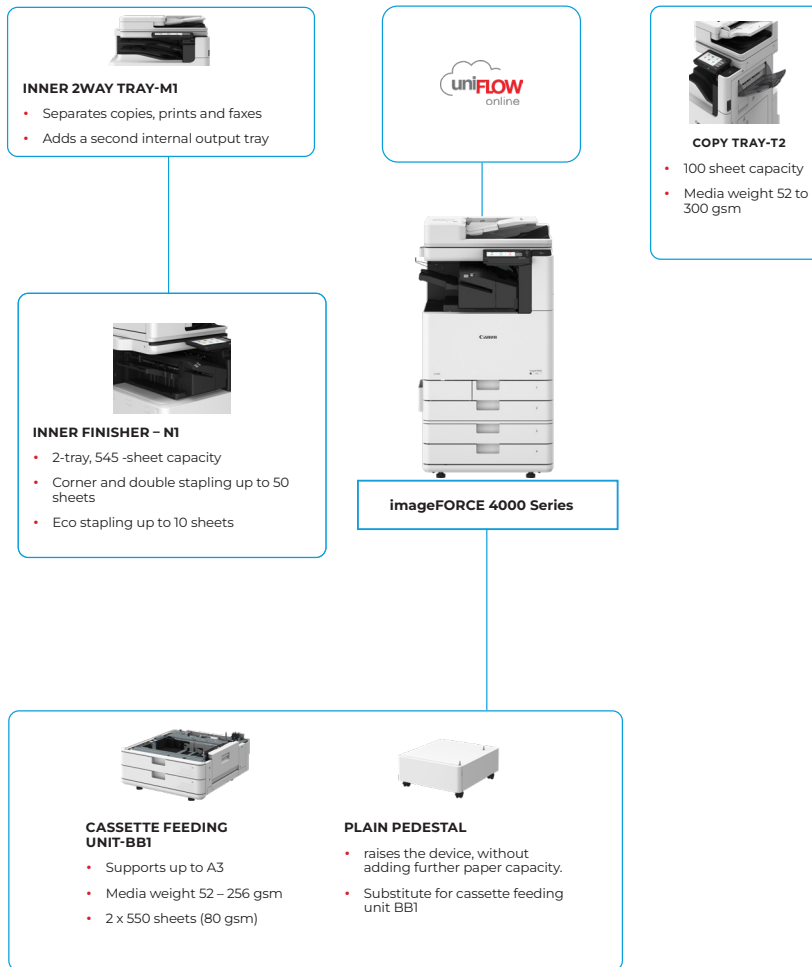

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#).

# TECHNICAL SPECIFICATIONS

# imageFORCE 4000 Series

MAIN UNIT	
<b>Machine Type</b>	A3 Monochrome Multifunctional
<b>Core Functions</b>	Print, Copy, Scan, Send and Optional Fax
<b>Processor</b>	1.6GHz Dual Core Processor
<b>Control Panel</b>	7 inch TFT LCD WVGA Color Touch panel
<b>Memory</b>	Standard: RAM 3.0GB
<b>Storage</b>	Standard: 64GB eMMC Optional: 256GB SSD
<b>Interface Connection</b>	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n)  OTHERS Standard: USB 2.0 (Host) x2, USB 2.0 (Device) x1
<b>Paper Supply Capacity (A4, 80gsm)</b>	Standard: 1,200 sheets 100 sheets: Multi-purpose tray x 1 550 sheets: Standard Cassette x 2 Maximum: 2,300 sheets (with Cassette Feeding Unit-BB1)
<b>Paper Output Capacity (A4, 80gsm)</b>	Standard: 250 sheets Maximum: 645 sheets (with Inner Finisher-N1 and Copy Tray-T2)
<b>Finishing Capabilities*</b>	Collate, Group, Offset, Staple, Hole Punch, Eco Staple, Staple On Demand * Finishing capabilities vary depending on the options connected.
<b>Supported Media Types</b>	Multi-purpose tray: Thin, Plain, Recycled, Color, Heavy, Coated*, Tracing, Bond, Transparency, Labels, Pre-punched, Letterhead, Envelope * 257-300gsm requires Media Adjustment Kit-A1 Upper Cassette: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope Lower Cassette: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope* * Envelope Feeder Attachment A (standard) is required.
<b>Supported Media Sizes</b>	Multi-purpose tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.4 x 139.7 mm to 320.0 x 457.2 mm Free size: 100.0 x 148.0 mm to 304.8 x 457.2 mm Envelopes: COM10 No.10, Monarch, ISO-C5, DL Envelope custom size: 98.0 x 98.0 mm to 320.0 x 457.2 mm Upper Cassette: Standard size: A4, A5, A5R, A6R, B5 Custom Size: 105.0 x 148.0 mm to 297.0 x 215.9 mm Envelopes: ISO-C5 Lower Cassette: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom Size: 105.0 x 148.0 mm to 304.8 x 457.2 mm Envelopes*: COM10 No.10, Monarch, DL * Envelope Attachment A (standard) is required.

<b>Supported Media Weights</b>	Multi-purpose tray: 52 to 300 gsm (Only 60 to 300 gsm supported with Media Adjustment Kit-A1*) * Media Adjustment Kit-A1 is required for Coated (257-300gsm) Upper/Lower Cassette: 52 to 256 gsm Duplex: 52 to 220 gsm
<b>Warm-up Time (Quick start mode: ON)</b>	4 Seconds From Sleep Mode: 10 seconds
<b>Dimensions (W x D x H)</b>	565 x 712 x 862 mm
<b>Installation Space (W x D)</b>	Basic : 978 x 1,141 mm (right door & multi-purpose tray opened + paper cassette opened) Fully Configured: 1,285 x 1,141 mm (with Inner Finisher tray max extended + Copy Tray-T2 max extended + paper cassette opened)
<b>Weight*</b> *including regular toner	Approx. 69 kg
PRINT SPECIFICATIONS	
<b>Print Speed(BW)</b>	imageFORCE 4045: 1-sided: Up to 45 ppm (A4), Up to 22 ppm (A3), Up to 25 ppm (A4R) 2-sided: Up to 45 ppm (A4), Up to 22 ppm (A3), Up to 25 ppm (A4R)  imageFORCE 4030: 1-sided: Up to 30 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R) 2-sided: Up to 30 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R)  imageFORCE 4025: 1-sided: Up to 25 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R) 2-sided: Up to 25 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R)
<b>Print Resolution (dpi)</b>	4,800 x 2,400
<b>Page Description Languages</b>	Standard: UFRII, PCL6/PCL5 Optional: Adobe® PostScript®3TM
<b>Printing From Mobile And Cloud</b>	AirPrint, Mopria, IPP Everywhere, Canon PRINT, uniFLOW Online, Universal Print  A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information
<b>OS Standard Printing</b>	Android, Windows® 11, Chrome OS, macOS (11.2.2 or later), iOS (15.2 or later), iPadOS
<b>Fonts</b>	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese) , Barcode fonts*2  *1 Optional PCL International Font Set-A1 is required. *2 Optional Barcode Printing Kit-D1 is required.

# TECHNICAL SPECIFICATIONS

# imageFORCE 4000 Series

<b>Print Features</b>	Secure Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/ Orientations, Toner Reduction, Poster Printing, Forced hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
<b>Operating System</b>	UFR II: Windows® 11/Server2016/Server2019/Server2022/Server2025*, macOS(11.7 or later)* PCL: Windows® 11/Server2016/Server2019/Server2022/Server2025* PS: Windows® 11/Server2016/Server2019/Server2022/Server2025*, macOS(11.7 or later)* PPD: Windows® 11, macOS(11.7 or later)*

\* As of Oct. 2025

## COPY SPECIFICATIONS

<b>Copy Speed (BW)</b>	imageFORCE 4045: 1-sided: Up to 45 ppm (A4), Up to 22 ppm (A3), Up to 25 ppm (A4R) 2-sided: Up to 45 ppm (A4), Up to 22 ppm (A3), Up to 25 ppm (A4R)  imageFORCE 4030: 1-sided: Up to 30 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R) 2-sided: Up to 30 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R)  imageFORCE 4025: 1-sided: Up to 25 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R) 2-sided: Up to 25 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R)
<b>First-Copy-Out Time (A4)</b>	imageFORCE 4045: 5.3 seconds imageFORCE 4030: 7.0 seconds imageFORCE 4025: 7.0 seconds
<b>Copy Resolution (dpi)</b>	600 x 600
<b>Multiple Copies</b>	Up to 9,999 copies
<b>Magnification</b>	Variable zoom: 25% to 400% (1% Increments)
<b>Copy Features</b>	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Sort, Job Build, N on 1, Different Size Originals, Sharpness, Erase Frame, Gutter, Copy ID Card, Skip Blank Pages, Free Size Original, Reserved copy, Copy Sample

## SCAN SPECIFICATIONS

<b>Type</b>	imageFORCE 4045: Standard: Color Scanner, DADF-F1* [2-sided to 2-sided]  imageFORCE 4030/4025: Standard: Color Scanner, DADF-G1* [2-sided to 2-sided] * Multi-Sheet Feed Detection is supported as an option.  DADF: Duplexing Automatic Document Feeder
<b>Document Feeder Paper Capacity (80 gsm)</b>	up to 100 sheets

<b>Document Feeder Acceptable Paper Weight</b>	Document Feeder media weight : 1-sided scanning: 38 to 128 gsm 2-sided scanning: 50 to 128 gsm
<b>Supported Media Sizes</b>	Platen: max. scanning size: 297.0 x 431.8 mm  A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R Custom size: 48.0 x 85.0 mm to 304.8 x 431.8 mm
<b>Scan Speed (ipm, BW/CL, A4)</b>	Single Pass DADF-F1 (for imageFORCE 4045): 1-sided Scanning: 80/80 (300 x 300 dpi, send) 2-sided Scanning: 120/120 (300 x 300 dpi, send)  Single Pass DADF-G1 (for imageFORCE 4030/4025): 1-sided Scanning: 35/35 (300 x 300 dpi, send) 2-sided Scanning: 70/70 (300 x 300 dpi, send)
<b>Scan Resolution (dpi)</b>	600 x 600
<b>Pull Scan Specifications</b>	Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows®11/Server 2016/Server 2019/Server 2022/Server 2025*
	*As of Oct. 2025
<b>Scan Method</b>	Push Scan, Pull Scan, Scan to Network, Scan to memory media (USB Memory Key), Scan to Mobile Devices, Scan to cloud-based services (uniFLOW Online)

## SEND SPECIFICATIONS

<b>Destination</b>	Standard: E-mail/Internet FAX (SMTP*), SMB, FTP, SFTP, FTPS, WebDAV Optional: Super G3 FAX * Available OAuth 2.0 authentication method on Microsoft Exchange Online and Google Workspace
<b>Address Book</b>	LDAP (2,000)/ Local (1,600) /Speed dial (200)
<b>Communication Protocol</b>	File: FTP (TCP/IP), SFTP (TCP/IP), FTPS (TCP/IP), SMB3.1.1 (TCP/IP), WebDAV E-mail/iFax: SMTP(send), POP3(receive)
<b>File Format</b>	Standard: TIFF (MMR), JPEG*, PDF (Compact, Searchable, PDF/A-1a, A-1b, PDF/A-2a,PDF/A-2b,PDF/A-2u, PDF/A-3a,PDF/A-3b,PDF/A-3u, Trace&Smooth, Encrypted), XPS (Compact, Searchable), PDF/XPS (Device Signature, User Signature), Office Open XML (PowerPoint, Word) Option: PDF(Trace & Smooth), PDF/XPS (User Signature) * Single-Page only.
<b>Universal Send Features</b>	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Originals, Dropout Color

## FAX SPECIFICATIONS

<b>Maximum Number Of Connection Lines</b>	1
<b>Modem Speed</b>	Super G3: 33.6 kbps G3: 14.4 kbps

# TECHNICAL SPECIFICATIONS

# imageFORCE 4000 Series

<b>Compression Method</b>	MH, MR, MMR, JBIG
<b>Resolution (dpi)</b>	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)
<b>Sending/Receiving Size</b>	Sending: A3, A4, A4R, A5*1, A5R*1, B4, B5*2, B5R*1 Receiving: A3, A4, A4R, A5, A5R, B4, B5, B5R *1 Sent as A4 *2 Sent as B4 short
<b>FAX Memory</b>	Up to 30,000 pages (2,000 jobs)
<b>Speed Dials</b>	Max. 200
<b>Group Dials/Destinations</b>	Max. 199 dials
<b>Sequential Broadcast</b>	Max. 256 addresses
<b>Memory Backup</b>	Yes
<b>Fax Features</b>	Sender's Name (TTI), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox

## SECURITY SPECIFICATIONS

<b>Authentication And Access Control</b>	User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW* (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Microsoft Entra ID Authentication (Password Login, Card Login), Google Workspace (Password Login, Card Login), Two-Factor Authentication at LUI/RUI, Access Management System (Access Control) * including uniFLOW Online/uniFLOW
<b>Document Security</b>	Print Security(Secure Print, Encrypted SecurePrint, Forced Hold Printing, uniFLOW Secure Print*1), Receive Data Security(Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS*2), Send Data Security(Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support)  *1 Requires optional uniFLOW Online / uniFLOW *2 Requires optional Universal Send Digital User Signature Kit-C1
<b>Network Security</b>	TLS 1.3, IPSec, IEEE802.1X authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), WPA3 support, Dual Network Support(Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Enabling/Disabling(Network Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Scan and Send -Virus Concerns for E-mail Reception

<b>Device Security</b>	Standard Storage Initialize, Job Log Conceal Function, Protecting MFP Software Integrity: Verify System at Startup (NIST SP800-193: Protection), Checking MFP Software Integrity & Platform Firmware Resiliency: Automatic System Recovery (NIST SP800-193: Recovery), Runtime Intrusion Detection: Trellix Embedded Control
<b>Device Management And Auditing</b>	Administrator Password, Digital Certificate and Key Management, SAN certificates, Audit Log, Cooperating with External Security Audit System (SIEM), Security Policy Setting

## ENVIRONMENTAL SPECIFICATIONS

<b>Operating Environment</b>	Temperature: 10 to 30 °C Humidity: 20 to 80% RH (Relative Humidity)
<b>Power Source</b>	220-240V 50/60Hz 4A
<b>Power Consumption</b>	Maximum: Approx. 1,500 W Copying (with DADF continuous scan): Approx. 642 W*1 Standby: Approx. 96W*1 Sleep Mode: Approx. 0.8W*2 *1 Reference value: measured one unit *2 0.8W is not available in all circumstances due to certain settings.  Typical Electricity Consumption (TEC)* : imageFORCE 4045: 0.48 kWh imageFORCE 4030: 0.29 kWh imageFORCE 4025: 0.24 kWh  *As per USA Energy Star 3.2  For detailed information relating to Erp:Lot6/26 regulation, please go to: <a href="https://www.canon-europe.com/for_work/lot26/">https://www.canon-europe.com/for_work/lot26/</a>
<b>Noise Levels</b>	Sound Power Level (LWA,m) Active (BW)(1-sided) imageFORCE 4045: 64dB, Kv 3dB imageFORCE 4030: 61dB, Kv 3dB imageFORCE 4025: 61dB, Kv 3dB  Sound Pressure (LpAm) Bystander's position: Active(BW)(1-sided/2-sided): imageFORCE 4045: 50dB imageFORCE 4030: 47dB imageFORCE 4025: 47dB * Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)  Stand-by: Noise-free* **"Noise-free" means that the sound pressure level at each bystander position is below the absolute criterion for background noise specified in ISO 7779.
<b>Standards for Environmentally Friendliness</b>	Blue Angel (Validation pending)

## CONSUMABLES

<b>Toner Cartridge/s</b>	Toner 1011 BK
<b>Toner (Estimated Yield @ 6% Coverage)</b>	Toner 1011 BK: 30,000 pages

# TECHNICAL SPECIFICATIONS

# imageFORCE 4000 Series

SOFTWARE AND PRINTER MANAGEMENT	
<b>Tracking &amp; Reporting</b>	uniFLOW Online
<b>Remote Management Tools</b>	iW Enterprise Management Console Remote Distribution & Management Service Monitoring Service
<b>Print Support Application</b>	Canon Print Assistant
<b>Scanning Software</b>	Color Network ScanGear 2
<b>Optimisation Tools</b>	Canon Driver Configuration Tool
<b>Platform</b>	MEAP (Multifunctional Embedded Application Platform)

PAPER SUPPLY OPTIONS	
<b>CASSETTE FEEDING UNIT-BB1</b>	Paper Capacity: 2 x 550 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 105.0 x 148.0 mm to 304.8 x 457.2 mm Paper Weight: 52 to 256 gsm

OUTPUT OPTIONS	
<b>Inner 2way Tray-M1</b>	Capacity (with 80 gsm paper) Upper tray: A4, A5, A5R, A6R, B5: 100 sheets SRA3, A3, A4R, B4, B5R: 50 sheets Lower tray (standard tray): A4, A5, A5R, A6R, B5: 250 sheets SRA3, A3, A4R, B4, B5R: 100 sheets Paper Weight: 52 to 300 gsm
<b>Copy Tray-T2</b>	Capacity (with 80gsm paper): A4, A5R, B5: 100 sheets A3, A4R, B4, B5R: 75 sheets Paper Weight: 52 to 220 gsm
<b>Inner Finisher-N1</b>	Tray Capacity (with 80gsm paper): Upper Tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R: approx. 45 sheets Lower Tray: A4, A5, A5R, B5: approx. 500 sheets A3, A4R, B4, B5R: 250 sheets A6R: 30 sheets SRA3, Envelope: 10 sheets Paper Weight: 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: (52 to 90 gsm) A4, B5: 50 sheets A4R: 40 sheets A3, B4: 30 sheets Eco Staple: A3, A4, B4, B5: 10 sheets (52 to 64 gsm) 8 sheets (65 to 81.4 gsm) 6 sheets (82 to 105 gsm) Staple On Demand: approx. 40 sheets (80 gsm)

<b>Inner 2/4 Hole Puncher-D1</b>	(Requires Inner Finisher-N1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes A3, A4, A4R, A5, B4, B5, B5R Four holes A3, A4
<b>Inner 4 Hole Puncher-D1</b>	(Requires Inner Finisher-N1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes A3, A4, A4R, A5, B4, B5, B5R

HARDWARE ACCESSORIES	
<b>Card Readers</b>	IC Card Reader Attachment-B4
<b>Others</b>	Document Feeder Double Feeding Detection Kit-A1 Option Attachment kit for Reader-A2 Media Adjustment Kit-A1 Utility Tray-B1 (imageFORCE 4045 only)

SYSTEM AND CONTROLLER OPTIONS	
<b>Print Accessories</b>	PS Printer Kit-BT1 PCL International Font Set-A1
<b>Send Accessories</b>	Universal Send Trace & Smooth PDF Kit-A1 Universal Send Digital User Signature Kit-C1
<b>Barcode Printing</b>	Barcode Printing Kit-D1
<b>System Accessories</b>	Optional Data Storage Kit-B1
<b>Fax Accessories</b>	Super G3 FAX Board-BV1 Remote Fax Kit-A1

OTHER OPTIONS	
<b>Staple Cartridges</b>	Staple Cartridge-Z1
<b>Accessibility Accessories</b>	ADF Access Handle-A1



## Certifications and compatibility



Canon Inc.  
Canon.com

Canon Europe  
canon-europe.com

English Edition  
© Canon Europa N.V. 2026