# FLEXIBLE, SECURE AND SUSTAINABLE A4 BLACK AND WHITE MULTIFUNCTION DEVICES.

Ideal for large offices and workgroups with high-volume printing and scanning needs

#### imageFORCE 710 Series



**BOOST PRODUCTIVITY** 

Produce a range of output at print speeds of up to 71ppm and scan speeds of 190ipm. Print on small paper sizes, save time with a fast warm up time and enable multiple users to print large documents thanks to additional paper capacity options.

**ROBUST SECURITY** 

Protect documents, devices and your network with multifactor authentication, network encryption and runtime intrusion detection. A security settings navigator recommends appropriate settings to protect against information leaks and cyber threats.

**SUSTAINABLE** 

Boost your sustainability efforts with devices that are built with up to 25% recycled plastic, use recyclable cardboard packaging and have a low energy consumption.


USER EXPERIENCE

Easily carry out print and scanning jobs using the intuitive user interface. Quickly reach the most relevant part of the online manual via a QR code and benefit from high contrast design improvements making it easier to use by people with visual impairment.

Canon

#### imageFORCE 710 Series

#### MAIN CONFIGURATION OPTIONS

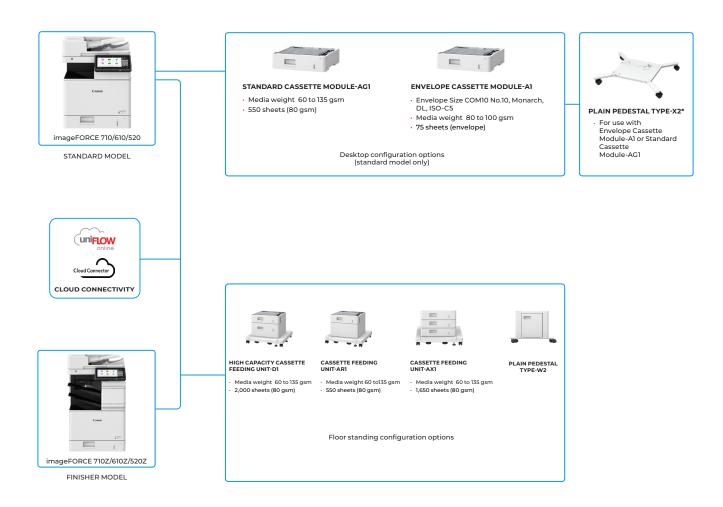

<sup>\*</sup>Paper supply options include up to three additional cassettes for non finisher models and up to two additional cassettes for finisher models (Z series)

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the online product configurator.



	MAIN UNIT	
Machine Type	A4 Monochrome Laser Multifunctional	
Core Functions	Print, Copy, Scan, Send, Store and optional Fax	
Processor	1.8GHz Dual Core Processor	
Control Panel	10.1" TFT LCD WSVGA Color Touch panel	
Memory	RAM: 4.5GB	
Storage	Standard: (SSD) 256GB	
Interface Connection	Network Standard: 1000Base-T/100Base-TX/10Base-T, Optional: Wi-Fi(IEEE 802.11a/b/g/n/ac/ax) Others Standard: USB 2.0 x 1 (Host), USB 3.0 x 1 (Host), USB 2.0 x 1 (Device) Optional: Serial Interface, Copy Control Interface	
Paper Supply Capacity (A4, 80gsm)	Standard: 650 sheets 100-sheets Multi-purpose tray 550-sheets Paper cassette x 1 Maximum: 3,200sheets (with High Capacity Cassette Feeding Unit-D1)	
Paper Output Capacity (A4, 80gsm)	Standard model (imageFORCE 710/610/520): 500 sheets Finisher model (imageFORCE 710Z/610Z/520Z): 1,000 sheets	
Finishing Capabilities	Standard model (imageFORCE 710/610/520): Collate, Group Finisher Model (imageFORCE 710Z/610Z/520Z): Collate, Group, Offset*, Staple* *available with upper tray	
Supported Media Types	Multi-purpose tray: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Letterhead,Envelope Paper Cassette: Thin, Plain, Recycled, Color, Heavy, Bond, Label, Pre-Punched, Letterhead	
Supported Media Sizes	Multi-purpose tray: Standard size: A4, A5, A5R, A6, B5 Custom size: 76.2 x 127.0 mm to 216.0 x 355.6 mm Envelope: COM10 No.10, Monarch, DL, ISO-C5 Paper Cassette: Standard size: A4, A5, A5R, A6, B5 Custom size: 99.0 x 148.0 mm to 216.0 x	
Supported Media Weights	297.0 mm  Multi-purpose tray: 60 to 200 gsm  Paper Cassette: 60 to 135 gsm  Duplex: 60 to 120 gsm	

Warm-up Time	Quick Startup Mode: 4 seconds or less*  * Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display.  From Power On: 10 Seconds or Less*		
	*Time from device power on, until copy ready (not print reservation)		
	From Sleep Mode: 10 Seconds or less		
Dimensions (W x D x H)	Standard model (imageFORCE 710/610/520): 500 x 598 x 617 mm Finisher model (imageFORCE 710Z/610Z/520Z): 502 x 598 x 814 mm		
Installation Space (W x D)	Standard model/ Finisher model: 1,052 x 823 mm (with left CRG door open + right door open + the cassette drawer open)		
Weight	Standard model (imageFORCE 710/610/520): Approx. 36kg including toner Finisher model (imageFORCE 710Z/610Z/520Z): Approx. 45kg including toner		
PRINT SPECIFICATIONS			
Print Speed*	imageFORCE 710/710Z: Up to 71 ppm (A4), Up to 113 ppm (A5), Up to 40 ppm (A5R, A6) imageFORCE 610/610Z: Up to 61 ppm (A4), Up to 99 ppm (A5), Up to 35 ppm (A5R, A6) imageFORCE 520/520Z: Up to 52 ppm (A4), Up to 80 ppm (A5), Up to 35 ppm (A5R, A6)		
Print Resolution (dpi)	Up to 1,200 x 1,200		
Page Description Languages	Standard: UFR II, PCL6/PCL5, Adobe® PostScript®3™		
Direct Print	Supported file types: PDF, EPS, TIFF/ JPEG, and XPS		
Printing From Mobile And Cloud	AirPrint, Mopria, IPP Everywhere, Canon PRINT, uniFLOW Online, Universal Print and Cloud Connector  A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information		



OS Standard Printing	Android/Windows® 10/Windows® 11/ Chrome OS/macOS (11.2.2 or later) /iOS (15.2 or later)/iPadOS	Copy Features	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Two-sided
Fonts	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts*2		Original, Job Build, N on 1, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Copy ID Card, Skip Blank Pages, Reserved copy, Copy Sample
	*1 Optional PCL International Font Set-A1 is	S	SCAN SPECIFICATIONS
	required. *2 Optional Barcode Printing Kit-D1 is required.	Туре	Single-pass Duplexing Automatic Document Feeder* [2-sided to 2-sided (Automatic)]
Print Features	Secured Print, Secure Watermark, Header/Footer, Page Layout, Two- sided Printing, Mixed Paper Sizes/ Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced		*Multi-Sheet Feed Detection is supported.
		Document Feeder Paper Capacity (80 gsm)	up to 100 Sheets
	Hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer	Document Feeder Acceptable Paper	Document Feeder media weight: 1-sided scanning: 42 to 128 gsm (BW),
Operating System	UFRII: Windows® 10/11/Server2016/ Server2019/Server2022/Server2025, macOS (10.14 or later) PCL: Windows® 10/11/Server2016/ Server2019/Server2022/Server2025 PS: Windows® 10/11/Server2016/ Server2019/Server2022/Server2025, macOS (10.14 or later) PPD: Windows® 10/11, macOS (10.15 or later)	weight	64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL)
			Note: Business card: 80 to 220 gsm Original width narrower than A6: 50 to 128 gsm Long Original(over than 355.6mm): 60 to 90gsm
C	COPY SPECIFICATIONS	Supported Media	Platen scanning size: up to 216.0 x 355.6
Copy Speed*	imageFORCE 710/710Z: Up to 71 ppm (A4), Up to 113 ppm (A5), Up to 40 ppm (A5R, A6) imageFORCE 610/610Z: Up to 61 ppm (A4), Up to 99 ppm (A5), Up to 35 ppm (A5R, A6) imageFORCE 520/520Z: Up to 52 ppm (A4), Up to 80 ppm (A5), Up to 35 ppm (A5R, A6)	Sizes	Document Feeder media size: A4, A5R, A6, B5, Custom size: 48.0 x 128.0 mm to 216.0 x 355.6 mm Business card: 48.0 x 85.0 mm to 55.0 x 91.0 mm
		Scan Speed (ipm: A4)	Send (300 x 300 dpi): Automatic Color Select "OFF": 1-sided Scanning: 95
	* 1-sided		2-sided Scanning: 190
First-Copy-Out Time (A4)	Approx. 5 seconds or less		Automatic Color Select "ON": 1-sided Scanning: 50 2-sided Scanning: 100 Copy (600 x 600 dpi):
Copy Resolution (dpi)	600 x 600		
Multiple Copies	Up to 9,999 copies		1-sided Scanning: 95 2-sided Scanning: 140
Copy Density	Automatic or Manual (9 Levels)	Scan Resolution	600 X 600
Magnification	Variable zoom: 25% to 400% (1% Increments)	(dpi)	
		Pull Scan Specifications	Color Network ScanGear2 for both TWAIN and WIA
			Supported OS: Windows® 10/11/Server 2016/Server 2019/Server 2022/Server 2025



## imageFORCE 710 Series

Scan Method	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network,	Group Dials/ Destinations
	Scan to USB Memory Key, Scan to Mobile devices, Scan to cloud(uniFLOW	Sequential Broadcast
	Online)   Scan to cloud* (uniFLOW Online &	Memory Backup
	Cloud Connector)	Fax Features
	*optional	
5	SEND SPECIFICATIONS	
Destination	Standard: E-mail/Internet FAX (SMTP*), SMB 3.0, FTP, WebDAV, Mail Box Optional: Super G3 FAX, IP Fax	ST
	* Available OAuth 2.0 authentication method on Microsoft 365 and Google Workspace	Mail Box (Number
Address Book	LDAP (2,000)/Local (1,600)/Speed dial (200)	supported)
Communication Protocol	File: FTP(TCP/IP), SMB3.1.1 (TCP/IP), WebDAV E-mail/I-Fax: SMTP, POP3	Advanced Space
File Format	TIFF, JPEG, PDF (Compact, Searchable, Optimize for Web, PDF A/1-b, Trace & Smooth, Encrypted, Device Signature,	
	User Signature), XPS (Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)	Advanced Space Available Disc Space
Universal Send Features	Original Type Selection, Two-sided Original, Density Adjustment, Sharpness, Erase Frame, Job Build, Delayed Send, Preview, Job Done	Advanced Space Features
	Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report,	SEC
	Original Content Orientation, Skip Blank Originals	Authentication And Access
	FAX SPECIFICATIONS	Control
Maximum Number Of Connection Lines	1	
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps	
Compression Method	MH, MR, MMR, JBIG	
Resolution (Dpi)	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)	
Sending/ Receiving Size	Sending: A4, A5R*, A6* , B5* Receiving: A4, A5*, A5R , B5 *Sent as A4	
Fax Memory	Up to 30,000 pages (2,000 jobs)	

Group Dials/ Destinations	Max. 199 dials	
Sequential Broadcast	Max. 256 addresses	
Memory Backup	Yes	
Fax Features	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log	
S	TORE SPECIFICATIONS	
Mail Box (Number supported)	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 30,000 Pages (2,000 jobs) Stored	
Advanced Space	Communication Protocol: SMB or WebDAV Supported Client PC: Windows®10/11 Concurrent Connections (Max.): SMB:64, WebDAV:3	
Advanced Space Available Disc Space	Standard: 16 GB	
Advanced Space Features	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore	
SEC	CURITY SPECIFICATIONS	
Authentication And Access Control	User Authentication (Picture Login, Picture and PIN Login, Card Login*, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online** (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Cloud Connector** (PIN Login), Microsoft Entra ID (PIN Login, Card Login), Two-Factor Authentication at LUI/RUI, Access Management System (Access Control)	



**Speed Dials** 

Max. 200

Document Security	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print*), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, BOX Security (Mail Box Password Protected, Advanced Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Secure Watermark	Power Consumption	Maximum: Approx. 1,500 W Copy mode (ADF continuation copying): 834.29W*1 Standby: Approx 32.40 W*1 Sleep mode: Approx. 0.36 W*2 *1 Reference value: measured one unit *2 0.36 W is not available in all circumstances due to certain settings  Typical Electricity Consumption (TEC)* rating imageFORCE 710/710Z: 0.73 kWh imageFORCE 610/610Z: 0.59 kWh imageFORCE 520/520Z: 0.49 kWh  *ENERGY STAR (US scheme), Eligibility Criteria Version 3.2 for Imaging Equipment
	Secure Watermark   *Optional	Noise Levels	Sound Power Level (LWA, m)*
Network Security	TLS 1.3 (FIPS140-3), IPSec (FIPS140-3), IEEE802.1X authentication, SNMPv3, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), WPA3 support (Wi-Fi), Enabling/Disabling (Network Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Prohibit the execution of files stored in Advanced Space in the MFP, Scan and Send -Virus Concerns for E-mail Reception	Noise Leveis	Active (1-sided) imageFORCE 710Z/710: 70/69 dB, Kv 3/3 dB imageFORCE 610Z/610: 68/68 dB, Kv 3/3 dB imageFORCE 520Z/520: 68/67 dB, Kv 3/3 dB Sound Pressure (LpAm)* Bystander's position: Active(BW) (1-sided): imageFORCE 710Z/710: 56/56 dB imageFORCE 610Z/610: 55/54 dB imageFORCE 520Z/520: 54/54 dB Stand-by
Device Security	Protecting SSD Data [SSD Data Encryption (FIPS140-3), SSD Lock], Standard SSD Initialize, Initialize (NIST 800-88 PURGE LEVEL), Trusted Platform Module (TPM 2.0), Job Log		imageFORCE 710Z/610Z/520Z: 25dB* imageFORCE 710/610/520: 21dB* *Reference value: Measured only one unit with ISO7779, described with ISO9296 (2017)
	Conceal Function, Protecting MFP Software Integrity: Verify System at Startup (NIST SP800-193: Protection), Checking MFP Software Integrity & Platform Firmware Resiliency: Automatic System Recovery (NIST SP800-193: Recovery), Runtime Intrusion Detection: Trellix Embedded Control, HCD-PP Common Criteria	Standards	Blue Angel (Validation Pending)
			CONSUMABLES
		Toner Cartridges	T03 Black
		Toner Yield (Estimated @5% Coverage)	51,500 pages Toner Cartridge yield in accordance with ISO/IEC 19752.
		SOFTWARE AND PRINTER MANAGEMENT	
Device	Certification (Pending Confirmation)  Administrator Password, Digital	Tracking and Reporting	uniFLOW Online (optional)
Auditing	Certificate And Key Management, SAN certificates, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data	Remote Management Tools	iW Enterprise Management Console, Remote Distribution & Management Service, Monitoring Service
	Logging, Security Policy Setting	Scanning	Color Network ScanGear 2
ENVIRO	DNMENTAL SPECIFICATIONS	Software	
Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative	Optimisation Tools	Canon Driver Configuration Tool
Power Source	Humidity) 220-240 V, 50/60 Hz, 4.8 A	Platform	MEAP (Multifunctional Embedded Application Platform)
	<u> </u>		



DARER SURRIY ORTIONS				
PAPER SUPPLY OPTIONS		ADDITIONAL OUTPUT FEATURES*		
Cassette Module- AG1	Paper Capacity: 550 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Heavy, Color, Label, Bond, Pre-punched, Letterhead Paper Size: A4, A5, A5R, A6, B5, Custom size: 99.0 x 148.0 mm to 216.0 x 355.6 mm Paper Weight: 60 to 135 gsm	Inner Finisher (only Finisher Model)	Tray Capacity (with 80 gsm paper, same paper type): Upper Tray: A4, A5R, B5: 400 sheets Lower Tray: A4, A5R, B5: 100 sheets Main unit output tray: A4, A5, A5R, A6, B5: 500 sheets	
Envelope Cassette Module-Al	Paper Capacity: 75 sheets (Envelope) Envelope Size: COM10 No.10, Monarch, DL, ISO-C5 Paper Weight: 80 to 100 gsm		Paper Weight: 60 to 163 gsm Staple Position: Corner Staple Capacity: 30 sheets (60 to 90 gsm), 20 sheets (91 to 120 gsm)	
Cassette Feeding Unit-AR1	Paper Capacity: 550 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Heavy, Color, Label, Bond, Pre-punched,		*Paper capacity may vary with different paper type/size.	
	Letterhead Paper Size: A4, A5, A5R, A6, B5, Custom	HARDWARE ACCESSORIES		
	size: 99.0 x 148.0 mm to 216.0 x 355.6 mm  Paper Weight: 60 to 135 gsm	Card Readers: IC Card Reader Box-D2	Various card readers available e.g. MiCard Plus. Please contact local Canon Office for more details.	
High Capacity	Upper cassette: Paper Capacity: 550 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Heavy, Color, Label, Bond, Pre-punched, Letterhead Paper Size: A4, A5, A5R, A6, B5, Custom size: 99.0 x 148.0 mm to 216.0 x 355.6 mm Paper Weight: 60 to 135 gsm	SYSTEM AND CONTROLLER OPTIONS		
Cassette Feeding		<b>Print Accessories</b>	PCL International Font Set-Al	
Unit-D1		Barcode Printing	Barcode Printing Kit-D1	
		System Accessories	Copy Control Interface Kit-Al Wireless LAN Board-Dl	
		FAX Accessories	Super G3 FAX Board-BM1 Remote Fax Kit-A1 IP FAX Expansion Kit-B1	
	Lower cassette: Paper Capacity: 2,000sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Heavy, Color, Bond, Pre-punched Paper Size: A4 Paper Weight: 60 to 135 gsm	OTHER OPTIONS		
		Accessibility Accessories	ADF Access Handle-Al	
		Consumables	Staple-P1	
Cassette Feeding Unit-AX1	Paper Capacity: First Cassette 550 sheets (80gsm) 2nd cassette 550 sheets (80gsm) 3rd cassette 550 sheets (80gsm) Paper Type: Thin, Plain, Recycled, Heavy, Color, Label, Bond, Pre-punched, Letterhead Paper Size: A4, A5, A5R, A6, B5, Custom size: 99.0 x 148.0 mm to 216.0 x 355.6 mm Paper Weight: 60 to 135 gsm			



#### imageFORCE 710 Series









#### **Certifications and compatibility**







Canon Inc. Canon.com

**Canon Europe** canon-europe.com



