

# HIGH-TECH, AI ENABLED A3 COLOUR MULTIFUNCTION PRINTERS, HELPING BUSINESSES TO STREAMLINE AND SECURE THEIR DIGITAL PROCESSES AND DOCUMENT WORKFLOWS

Fast and reliable, incorporating the latest technologies to offer best-in-class print quality and productivity while protecting sensitive data and minimising downtime and service costs

## imageFORCE C5100 Series



### HIGH QUALITY PRINT

Designed to produce high-quality, high-volume prints in a wide range of paper media to meet your creative needs thanks to the innovative exposure technology and market leading 4,800 x 2,400 dpi print resolution

### OUTSTANDING SECURITY

360° protection for a complete peace of mind with AI-recommended security settings that safeguard your device, network and sensitive data

### UNPARALLELED RELIABILITY


Built-in smart sensors and use of machine learning AI assure to maximise the device performance and uptime for an enhanced productivity and uninterrupted business continuity

### SUSTAINABILITY FOCUS

Built with 30% recycled materials, offering low energy consumption and quiet operation. Minimise paper and toner waste through error-free printing and scanning to reduce operational costs and environmental impact

# imageFORCE C5100 Series

## MAIN CONFIGURATION OPTIONS

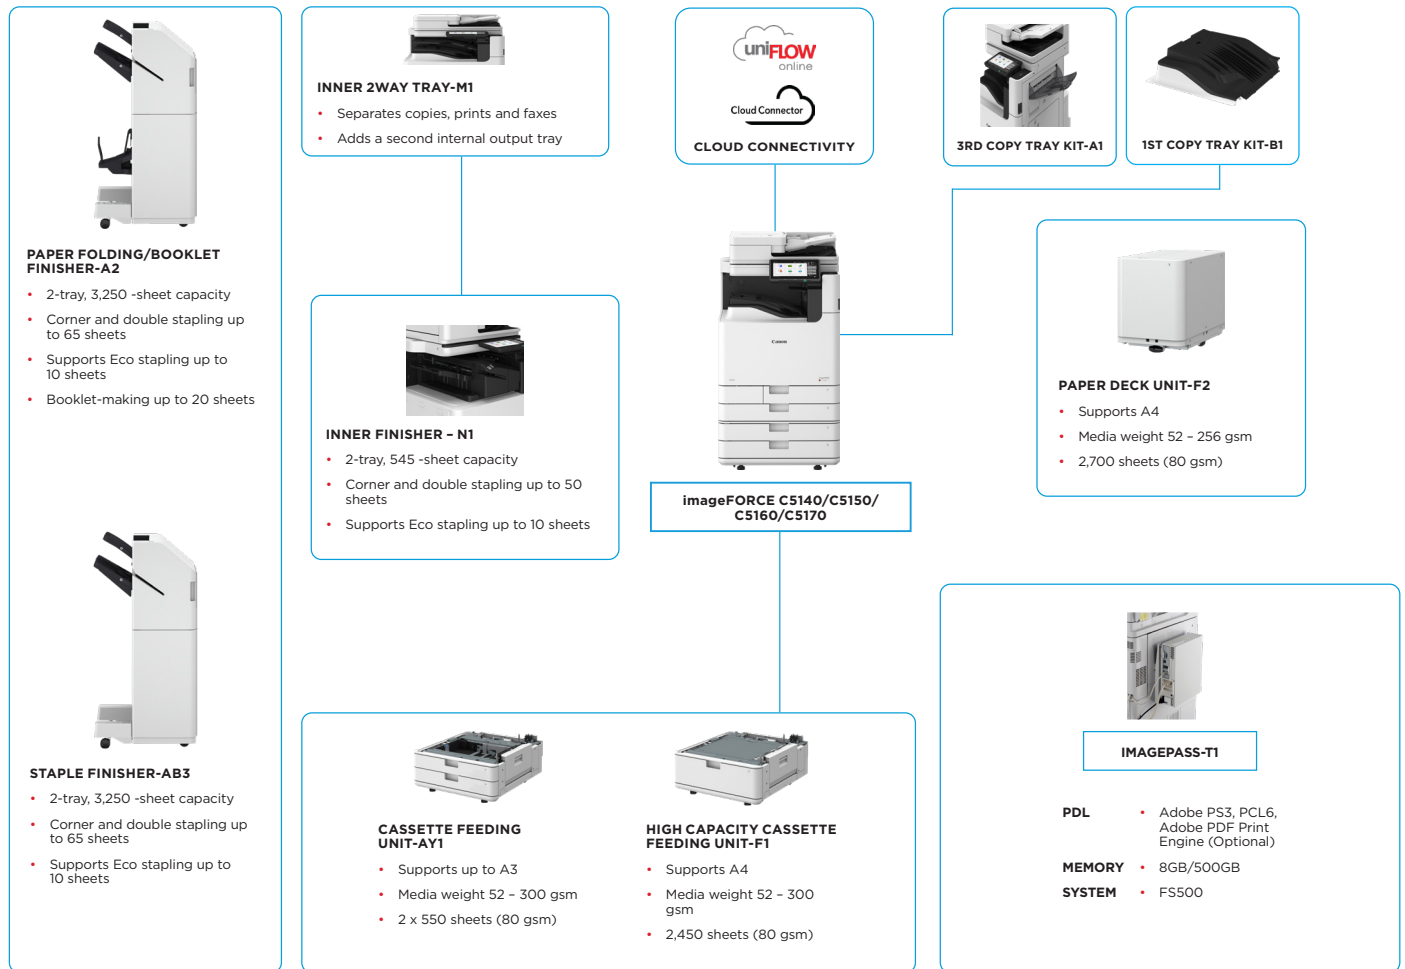

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#).

# TECHNICAL SPECIFICATIONS

# imageFORCE C5100 Series

MAIN UNIT	
Machine Type	A3 Color Multifunctional
Core Functions	Print, Copy, Scan, Send, Store and Optional Fax
Processor	1.8GHz Dual Core Processor
Control Panel	10.1" TFT LCD WSVGA Color Touch panel
Memory	Standard: RAM: 6.0GB
Storage	Standard: (SSD) 256GB Optional: (SSD) 1TB
Interface Connection	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T Optional: Wireless LAN (IEEE 802.11a/b/g/n/ac/ax) OTHERS Standard: USB 2.0 (Host) x1, USB 3.0 (Host) x1, USB 2.0 (Device) x1 Optional: Serial Interface, Copy Control Interface
Paper Supply Capacity (A4, 80gsm)	Standard: 1,200 sheets 100-sheet Multi-purpose tray x 1 550-sheet Paper cassette x 2 Maximum: 6,350 sheets (with High Capacity Cassette Feeding Unit-F1 + Paper Deck Unit-F2)
Paper Output Capacity (A4, 80gsm)	Maximum: 3,450 Sheets (with Staple Finisher-AB3 or Paper Folding/Booklet Finisher-A2 and 3rd Copy Tray Kit-A1)
Finishing Capabilities*	Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand, V-fold, C-fold, Z-fold * Finishing capabilities vary depending on the options connected.
Supported Media Types	Multi-purpose tray: Thin, Plain, Recycled, Eco, Color, Heavy, Coated, Tracing, Bond, Transparency, Label, Pre-punched, Letterhead, Tab, Envelope  Paper Cassette (Upper/Lower): Thin, Plain, Recycled, Eco, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope* * Envelope Feeder Attachment (standard) is required.

Supported Media Sizes	Multi-purpose tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.0 x 139.7 mm to 320.0 x 457.2 mm Free Size: 98.0 x 139.7 mm to 320.0 x 457.2 mm Long sheet*: 98.0 x 457.3 mm to 320.0 mm x 1,300.0 mm Envelopes: COM 10 No.10, Monarch, DL, ISO-C5 Envelope custom size: 98.0 x 90.0 mm to 320.0 x 457.2 mm  * Long Sheet Feeding Tray-A1 is required.  Upper Cassette: Standard size: A4, A5, A5R, A6R, B5 Custom Size: 98.0 x 148.0 mm to 297.0 x 215.9 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5  Lower Cassette: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.0 x 148.0 mm to 304.8 x 457.2 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5
Supported Media Weights	Multi-purpose tray: 52 to 300 gsm Paper Cassette (Upper): 52 to 256 gsm Paper Cassette (Lower): 52 to 300 gsm Duplex: 52 to 256 gsm
Warm-up Time	Quick Startup Mode: 4 seconds or less* * Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display.  From Sleep Mode: C5170: 7 Seconds or less C5160/C5150/C5140: 6 Seconds or less From Power On: 6 Seconds or less* * Time from device power-on, until copy ready (not print reservation)
Dimensions (W x D x H)	620 x 722 x 937 mm
Installation Space (W x D)	Basic: 1,050 x 1,162 mm (Right Cover Open with Multi-purpose tray extended + Cassette Drawers Open) Fully Configured: 2,044 x 1,162 mm (Staple Finisher-AB3/Paper Folding/Booklet Finisher-A2 with the extension tray extended + Paper Folding Unit-L1 + Paper Deck Unit-F2 + Cassette Drawers open)
Weight*	Approx. 105 kg
*including regular toner	

# TECHNICAL SPECIFICATIONS

# imageFORCE C5100 Series

PRINT SPECIFICATIONS	
<b>Print Speed (BW and CL)</b>	imageFORCE C5170: up to 70 ppm (A4, A5*, A5R, A6R*), up to 36 ppm (A3), up to 42 ppm (A4R) imageFORCE C5160: up to 60 ppm (A4, A5*, A5R, A6R*), up to 32 ppm (A3), up to 36 ppm (A4R) imageFORCE C5150: up to 50 ppm (A4, A5*, A5R, A6R*), up to 27 ppm (A3), up to 30 ppm (A4R) imageFORCE C5140: up to 40 ppm (A4, A5*, A5R, A6R*), up to 21 ppm (A3), up to 24 ppm (A4R) *1 sided only
<b>Print Resolution (dpi)</b>	4,800 x 2,400 dpi
<b>Page Description Languages</b>	Standard: UFR II, PCL6/PCL5, Adobe® PostScript®3™
<b>Direct Print</b>	Supported file types: PDF, EPS, TIFF/JPEG, and XPS
<b>Printing From Mobile And Cloud</b>	AirPrint, Mopria®, IPP Everywhere, Canon PRINT app, uniFLOW Online, Universal Print by Microsoft and Cloud Connector  A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information
<b>OS Standard Printing</b>	Android/Windows® 10/Windows® 11/Chrome OS/macOS (11.2.2 or later) /iOS (15.2 or later)/ iPadOS
<b>Fonts</b>	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts*2  *1 Optional PCL International Font Set-A1 is required. *2 Optional Barcode Printing Kit-D1 is required.
<b>Print Features</b>	Secured Print, Secure Watermark, Header/ Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/ Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
<b>Operating System</b>	UFR II: Windows® 10/11/Server2016/Server2019/Server2022/Server 2025, macOS (10.14 or later) PCL: Windows® 10/11/Server2016/Server2019/Server2022/Server 2025 PS: Windows® 10/11/Server2016/Server2019/Server2022/Server 2025, macOS (10.14 or later) PPD: Windows® 10/11/Server2016/Server2019/Server2022/Server 2025, macOS (10.14 or later)  As of Dec. 2024
COPY SPECIFICATIONS	
<b>Copy Speed (BW and CL)</b>	imageFORCE C5170: up to 70 ppm (A4, A5*, A5R, A6R*), up to 36 ppm (A3), up to 42 ppm (A4R) imageFORCE C5160: up to 60 ppm (A4, A5*, A5R, A6R*), up to 32 ppm (A3), up to 36 ppm (A4R) imageFORCE C5150: up to 55 ppm (A4, A5*, A5R, A6R*), up to 29 ppm (A3), up to 36 ppm (A4R) imageFORCE C5140: up to 40 ppm (A4, A5*, A5R, A6R), up to 21 ppm (A3), up to 24 ppm (A4R) *1-sided only

<b>First-Copy-Out Time (A4, BW/CL)</b>	imageFORCE C5170: Approx. 2.7 / 3.7 seconds or less imageFORCE C5160: Approx. 2.9 / 4.2 seconds or less imageFORCE C5150: Approx. 3.4 / 4.9 seconds or less imageFORCE C5140: Approx. 4.1 / 6.1 seconds or less
<b>Copy Resolution (dpi)</b>	600 x 600
<b>Multiple Copies</b>	Up to 999 copies
<b>Copy Density</b>	Automatic or Manual (9 Levels)
<b>Magnification</b>	Variable zoom: 25% to 400% (1% Increments)
<b>Copy Features</b>	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Mirror Image, Store in Mail Box, Superimpose Image, Copy ID Card, Skip Blank Pages, Free Size Original, Color Mode, Reserved copy, Copy Sample
SCAN SPECIFICATIONS	
<b>Type</b>	Single-pass Duplexing Automatic Document Feeder* [2-sided to 2-sided (Automatic)] * Multi-Sheet Feed Detection is supported.
<b>Document Feeder Paper Capacity (80 gsm)</b>	up to 200 Sheets
<b>Document Feeder Acceptable Paper Weight</b>	38 to 220 gsm *An acceptable weights of A6R or smaller is 50 to 220gsm.
<b>Supported Media Sizes</b>	Platen scanning size: up to 297.0 x 431.8 mm  Document Feeder media size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R Custom size: 69.9 x 139.7 mm to 304.8 x 431.8 mm
<b>Scan Speed (ipm, BW/CL, A4)</b>	1-sided Scanning: 135/135 (300 x 300 dpi, send), 80/80 (600 x 600 dpi, copy) 2-sided Scanning: 270/270 (300 x 300 dpi, send), 160/90 (600 x 600 dpi, copy)
<b>Scan Resolution (dpi)</b>	600 X 600
<b>Pull Scan Specifications</b>	Color Network ScanGear2 for both TWAIN and WIA  Supported OS: Windows® 10/11/Server 2016/Server 2019/Server 2022/Server 2025 As of Dec. 2024
<b>Scan Method</b>	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network, Scan to USB Memory Key, Scan to Mobile devices, Scan to cloud* (uniFLOW Online & Cloud Connector)  *optional

# TECHNICAL SPECIFICATIONS

# imageFORCE C5100 Series

SEND SPECIFICATIONS	
<b>Destination</b>	Standard: E-mail/Internet FAX (SMTP*), SMB 3.0, FTP, WebDAV, Mail Box Optional: Super G3 FAX, IP Fax  * Available OAuth 2.0 authentication method on Microsoft 365 and Google Workspace
<b>Address Book</b>	LDAP (2,000)/Local (1,600)/Speed dial (200)
<b>Send Resolution (dpi)</b>	Push: up to 600 x 600 Pull: up to 600 x 600
<b>Communication Protocol</b>	File: FTP(TCP/IP), SMB3.1.1 (TCP/IP), WebDAV E-mail/I-Fax: SMTP, POP3
<b>File Format</b>	TIFF(MMR), JPEG*, PDF(Compact, Searchable, Optimize for Web, PDF/A-1b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS(Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)  *Single page only
<b>Universal Send Features</b>	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages

FAX SPECIFICATIONS	
<b>Maximum Number Of Connection Lines</b>	2
<b>Modem Speed</b>	Super G3: 33.6 kbps G3: 14.4 kbps
<b>Compression Method</b>	MH, MR, MMR, JBIG
<b>Resolution (Dpi)</b>	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)
<b>Sending/Receiving Size</b>	Sending: A3, A4, A4R, A5*, A5R*, A6R*, B4, B5**, B5R* Receiving: A3, A4, A4R, A5, A5R, B4, B5, B5R  * Sent as A4 ** Sent as B4 short
<b>Fax Memory</b>	Up to 30,000 pages (2,000 jobs)
<b>Speed Dials</b>	Max. 200
<b>Group Dials/ Destinations</b>	Max. 199 dials
<b>Sequential Broadcast</b>	Max. 256 addresses
<b>Memory Backup</b>	Yes
<b>Fax Features</b>	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log

STORE SPECIFICATIONS	
<b>Mail Box (Number supported)</b>	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 10,000 Pages (2,000 jobs) Stored as a guideline
<b>Advanced Space</b>	Communication Protocol: SMB or WebDAV Supported Client PC: Windows® 10/11 Concurrent Connections (Max.): SMB:64, WebDAV:3

<b>Advanced Space Available Disc Space</b>	Standard: 16 GB (With option: max. 480GB)
<b>Advanced Space Features</b>	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore

SECURITY SPECIFICATIONS	
<b>Authentication And Access Control</b>	User Authentication (Picture Login, Picture and PIN Login, Card Login*, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online** (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Cloud Connector** (PIN Login), Microsoft Entra ID (PIN Login, Card Login), Two-Factor Authentication at LUI/RUI, Access Management System (Access Control)  * Card readers are optional, please refer to Hardware Accessories **Subscription required

<b>Document Security</b>	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print*), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, BOX Security (Mail Box Password Protected, Advanced Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Document Tracking (Secure Watermark)  *Requires uniFLOW Online / uniFLOW
--------------------------	--

<b>Network Security</b>	TLS 1.3, IPSec, IEEE802.1X authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), up to WPA3 (using Wi-Fi), Enabling/Disabling (Network Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Prohibit the execution of files stored in Advanced Space in the MFP, Scan and Send -Virus Concerns for E-mail Reception
-------------------------	---

<b>Device Security</b>	Protecting SSD Data [SSD Data Encryption (FIPS140-3), SSD Lock], Standard SSD Initialize, Initialize (NIST 800-88 Purge Level), Trusted Platform Module (TPM 2.0), Job Log Conceal Function, Protecting MFP Software Integrity: Verify System at Startup (NIST SP800-193: Protection), Checking MFP Software Integrity & Platform Firmware Resiliency: Automatic System Recovery (NIST SP800-193: Recovery), Runtime Intrusion Detection: Trellix Embedded Control, HCD-PP Common Criteria Certification*  * Validation pending
------------------------	---

# TECHNICAL SPECIFICATIONS

<b>Device Management And Auditing</b>	Administrator Password, Digital Certificate And Key Management, SAN certificates, Audit Log, Cooperating with External Security Audit System (SIEM: Security Information and Event Management), Image Data Logging, Security Policy Setting
<b>ENVIRONMENTAL SPECIFICATIONS</b>	
<b>Operating Environment</b>	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)
<b>Power Source</b>	220-240 V, 50/60 Hz, 6 A
<b>Power Consumption</b>	<p>Maximum:            imageFORCE C5170: Approx. 2,000 W            imageFORCE C5160/C5150/C5140: Approx. 1,800 W            Copying (with DADF continuous scan):            imageFORCE C5170/C5160/C5150: Approx. 1084 W*<sup>1</sup>            imageFORCE C5140: Approx. 750 W*<sup>1</sup>            Standby: Approx. 44.7 W *<sup>1</sup>            Sleep mode: Approx. 0.5 W*<sup>2</sup></p> <p>*<sup>1</sup> Reference value: measured one unit            *<sup>2</sup> 0.5 W is not available in all circumstances due to certain settings.</p> <p>Typical Electricity Consumption (TEC)*:            imageFORCE C5170: 0.77 kWh            imageFORCE C5160: 0.64 kWh            imageFORCE C5150: 0.52 kWh            imageFORCE C5140: 0.39 kWh</p> <p>* As per USA Energy Star 3.2</p>
<b>Noise Levels (BW/CL)</b>	<p>Sound Power Level (LWA,m)*            Active (BW)(1-sided):</p> <p>imageFORCE C5170: 66dB, Kv 3dB            imageFORCE C5160: 64dB, Kv 3dB            imageFORCE C5150: 62dB, Kv 3dB            imageFORCE C5140: 61dB, Kv 3dB</p> <p>Sound Pressure (LpAm)*            Bystander's position:            Active(BW/CL)(1-sided):</p> <p>imageFORCE C5170: 51 dB/52 dB            imageFORCE C5160: 50 dB/50 dB            imageFORCE C5150: 48 dB/49 dB            imageFORCE C5140: 47 dB/47 dB</p> <p>Stand-by:            imageFORCE C5170/C5160/C5150/C5140:            19 dB*</p> <p>*Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)</p>
<b>Standards</b>	Blue Angel (Validation pending)
<b>CONSUMABLES</b>	
<b>Toner Cartridges</b>	C-EXV 1001 BK/C/M/Y C-EXV 1001L C/M/Y
<b>Toner Yield (Estimated @5% Coverage)</b>	C-EXV 1001 BK: 63,000 pages C-EXV 1001 C/M/Y: 54,500 pages C-EXV 1001L C/M/Y: 24,000 pages
<b>SOFTWARE AND PRINTER MANAGEMENT</b>	
<b>Tracking &amp; Reporting</b>	uniFLOW Online For more information, please refer to <a href="#">uniFLOW Online</a>
<b>Cloud Connectivity</b>	uniFLOW Online/Cloud Connector (optional)

# imageFORCE C5100 Series

<b>Remote Management Tools</b>	iW Enterprise Management Console Monitoring Service Remote Distribution & Management Service
<b>Scanning Software</b>	Color Network ScanGear 2
<b>Optimisation Tools</b>	Canon Driver Configuration Tool
<b>Platform</b>	MEAP (Multifunctional Embedded Application Platform)
<b>Document Publishing</b>	PowerPDF Advanced (Optional)
<b>FIERY PRINT CONTROLLER SPECIFICATIONS (EMBEDDED)</b>	
<b>Optional/Standard</b>	Optional on all models
<b>Name</b>	imagePASS-T1 (Embedded)
<b>Print Resolution (dpi)</b>	1200 x 1200, 600 x 600
<b>Page Description Language(s)</b>	Adobe PS3, PCL6, Adobe PDF Print Engine(Optional)
<b>Memory</b>	8GB (4GBx2)
<b>Hard Disk Drive</b>	500 GB DATA
<b>Processor Speed</b>	Intel Pentium Gold 5400(3.7GHz)
<b>System</b>	FS500
<b>Fonts</b>	PS: 138 Fonts PCL: 113 Fonts
<b>Supported Operating Systems</b>	<p>Windows10 32bit* and 64 bit /Windows11/            Windows Server 2016/ Windows Server 2019/            Windows Server 2022/            macOS 10.15, 11.0, 12, 13, 14</p> <p>*Windows10 32bit are supported by printer driver only</p>
<b>Interface</b>	2 x Ethernet (1000Base-T/100Base-TX/10Base-T), USB3.0 x 2 (Rear)
<b>Network protocols</b>	TCP/IP (FTP, SMTP, POP, HTTP, SNMP, LDAP, SLP, SMB, LPD, IPP, WS-Discovery, Bonjour, Direct Mobile Printing, Port9100, SNTP, 802.1X, DHCP, DNS, NTP)
<b>Direct Print</b>	PDF1.7, EPS, TIFF6, JDF1.4/JMF(Optional)
<b>VDP</b>	FreeForm v1, v2.1
<b>Fiery Print Controller Standard Features</b>	Fiery Command WorkStation 7/Paper Catalog/Fiery Spot-On/Fiery Remote Scan
<b>Fiery Print Controller Options</b>	Fiery Impose/Fiery Compose/Fiery Impose and Compose/Fiery Automation package/ Fiery ColorRight package/Fiery JobExpert and PDF Processing Kit
<b>HW Platform</b>	E500
<b>Base OS</b>	Debian of Linux
<b>Power Source</b>	AC100-240V, 50/60Hz; 1.5A (100V) - 1.0A (240V)
<b>Maximum Power Consumption</b>	55W
<b>PAPER SUPPLY OPTIONS</b>	
<b>Cassette Feeding Unit-AY1</b>	<p>Paper Capacity: 2 x 550 sheets (80 gsm)            Paper Type: Thin, Plain, Recycled, Eco, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead            Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R            Custom size: 98.0 x 148.0 mm to 304.8 x 457.2 mm            Paper Weight: 52 to 300 gsm</p>



# TECHNICAL SPECIFICATIONS

# imageFORCE C5100 Series

<b>High Capacity Cassette Feeding Unit-F1</b>	Paper Capacity: 2,450 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Eco, Color, Heavy, Bond, Pre-punched, Letterhead Paper Size: A4 Paper Weight: 52 to 300 gsm
<b>Paper Deck Unit-F2</b>	(Requires Cassette Feeding Unit-AY1 or High Capacity Cassette Feeding Unit-F1) Paper Capacity: 2,700 sheets (80 gsm) Paper Type: Thin, Plain, Color, Recycled, Heavy, Pre-punched Paper Size: A4, B5 Paper Weight: 52 to 256 gsm
<b>OUTPUT OPTIONS</b>	
<b>1st Copy Tray Kit-B1</b>	Capacity (with 80gsm paper): A4, A5, A5R, A6R, B5: 250 sheets SRA3, A3, A4R, B4, B5R: 100 sheets Long sheet*: Length up to 900.0 mm: 20 sheets (151 to 163 gsm) Length up to 1,200.0 mm: 1 sheet (151 to 163 gsm) Paper Weight: 52 to 300 gsm * Long Sheet Catch Tray-D1 is required.
<b>Inner 2way Tray-M1</b>	(Requires 1st Copy Tray Kit-B1) Tray Capacity (with 80 gsm paper) Upper tray: A4, A5, A5R, A6R, B5: 100 sheets SRA3, A3, A4R, B4, B5R: 50 sheets Lower tray (standard tray): A4, A5, A5R, A6R, B5: 250 sheets SRA3, A3, A4R, B4, B5R: 100 sheets Paper Weight: 52 to 300 gsm
<b>3rd Copy Tray Kit-A1</b>	Capacity (with 80gsm paper): A4, A5R, B5: 100 sheets A3, A4R, B4, B5R: 75 sheets Paper Weight: 52 to 300 gsm
<b>Inner Finisher-N1</b>	Tray Capacity (with 80gsm paper): Upper Tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R : approx. 45 sheets long sheet length of up to 900.0 mm: 1 sheet Lower Tray: A4, A5, A5R, B5: approx. 500 sheets A3, A4R, B4, B5R: 250 sheets A6R: 30 sheets SRA3, Envelope: 10 sheets Paper Weight: 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: (52 to 90 gsm) A4, B5: 50 sheets A4R: 40 sheets A3, B4: 30 sheets Eco Staple: A3, A4, B4, B5: 10 sheets (52 to 64 gsm) 8 sheets (65 to 81.4 gsm) 6 sheets (82 to 105 gsm) Staple On Demand: approx. 40 sheets (80 gsm)

<b>Staple Finisher-AB3</b>	(Requires Buffer Pass Unit-R1) Tray Capacity (with 80gsm paper): Upper Tray: A4, A5, A5R, A6R, B5: approx. 250 sheets SRA3, A3, A4R, B4, B5R: approx. 125 sheets Lower Tray: A4, A5, A5R, B5: 3,000 sheets SRA3, A3, A4R, B4, B5R: 1,500 sheets A3, B4 (Z-fold*): 30 sheets A4R (Z-fold*): 10 sheets A6R: 250 sheets Envelopes: Monarch: 30 sheets, COM10 No.10, DL, ISO-C5: 100 sheets Long sheet length of up to 1300.0 mm: 20 sheet (ejected to the top of Buffer Pass Unit-R1 and Staple Finisher-AB3) Paper Weight: Upper Tray: 52 to 256 gsm Lower Tray: 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: (52 to 90 gsm) A4, B5: 65 sheets A4R: 40 sheets A3, B4: 30 sheets Eco Staple: A3, A4: 10 sheets (52 to 64 gsm) 8 sheets (65 to 81.4 gsm) 6 sheets (82 to 105 gsm) Staple On Demand: 65 sheets (52 to 90 gsm) * Paper Folding Unit-L1 is required.
<b>Paper Folding/Booklet Finisher-A2</b>	(Requires Buffer Pass Unit-R1) (Includes the above Staple Finisher-AB3 basic staple specifications.) Saddle Stitch/V-fold paper size: A3, A4R, B4 C-fold paper size: A3, A4R, B4 Saddle Stitch Staple Capacity: up to 20 sheets x 10 sets (52 to 81.4 gsm) (including 1 cover sheet 52 to 256 gsm) V-fold Capacity: up to 5 sheets (52 to 105 gsm) C-fold Capacity: A4R: up to 6 sheets (52 to 90 gsm) up to 5 sheets (91 to 128 gsm) A3, B4: up to 5 sheets (64 to 128 gsm)
<b>Paper Folding Unit-L1</b>	(Requires Staple Finisher-AB3 or Paper Folding/Booklet Finisher-A2) Paper size: A3, A4R, B4
<b>Inner 2/4 Hole Puncher-D1</b>	(Requires the Inner Finisher-N1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R Four holes: A3, A4
<b>Inner 4 Hole Puncher-D1</b>	(Requires the Inner Finisher-N1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes: A3, A4, A4R, A5, B4, B5, B5R
<b>2/4 Hole Puncher Unit-A1</b>	(Requires either the Staple Finisher-AB3 or Paper Folding/Booklet Finisher-A2) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R Four holes: A3, A4

# TECHNICAL SPECIFICATIONS

# imageFORCE C5100 Series

<b>4 Hole Puncher Unit-A1</b>	(Requires either the Staple Finisher-AB3 or Paper Folding/Booklet Finisher-A2) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes: A3, A4, A4R, A5, B4, B5, B5R
<b>HARDWARE ACCESSORIES</b>	
<b>Card Readers</b>	Copy Card Reader-F1 Copy Card Reader Attachment-B7 IC Card Reader Box for Numeric Keypad-A1 Various card readers are available e.g. MiCard Plus. Please contact local Canon Office for more details
<b>Others</b>	Printer Cover-M2 Utility Tray-B1 Numeric Keypad-A2 Buffer Pass Unit-P2 Long Sheet Catch Tray-D1 Plain Pedestal Type-Q3
<b>SECURITY OPTIONS</b>	
<b>Data Security</b>	256GB SSD-A1 1TB SSD-A1 Memory Mirroring Kit-A1
<b>SYSTEM AND CONTROLLER OPTIONS</b>	
<b>Print Accessories</b>	PCL International Font Set-A1 Barcode Printing Kit-D1
<b>System Accessories</b>	Copy Control Interface Kit-A1 Serial Interface Kit-K3 Wireless LAN Board-H1 Wireless LAN 5GHz License-A1®E
<b>Fax Accessories</b>	Super G3 FAX Board-AX-2 Remote Fax Kit-A1 IP FAX Expansion Kit-B1
<b>OTHER OPTIONS</b>	
<b>Accessibility Accessories</b>	ADF Access Handle-A1 Voice Operation Kit-D1
<b>Staple Cartridges</b>	Staple Cartridge-X1 / Y1 / Z1



## Certifications and compatibility



Canon Inc.  
Canon.com

Canon Europe  
canon-europe.com

English Edition  
© Canon Europa N.V. 2025