

Marzo de 2025

Evaluación comparativa de grandes formatos: Comparativa de la Canon imagePROGRAF TX-4200 con la Epson SureColor SC-T7700D

Objetivo de la prueba

Canon Europa encargó a Keypoint Intelligence la realización de unas pruebas de rendimiento con carácter confidencial en los equipos Canon imagePROGRAF TX-4200 de 44 pulgadas (probado en configuración de doble bobina) y con la Epson SureColor SC-T7700D. Keypoint redactará un informe comparativo destacando los puntos fuertes y débiles de los dos productos en las áreas de calidad de imagen, productividad, impresión de carteles y pancartas, impresión directa, características del dispositivo, funcionalidad del controlador y consumo de tinta. Todas las pruebas se realizarán en las instalaciones que Keypoint utiliza a tal efecto en Wokingham (Reino Unido).

Resumen

| Categoría | Canon imagePROGRAF TX-4200 | Epson SureColor SC-T7700D |
|---|-------------------------------|------------------------------|
| Calidad de imagen | \checkmark | |
| Productividad de impresión | ~ | |
| Impresión de pancarta | | ~ |
| Impresión de carteles | ~ | |
| Impresión directa | = | = |
| Consumo de tinta | ~ | |
| Características del dispositivo | = | = |
| Características del controlador de impresión | = | = |

✓ indica una ventaja del modelo en cuestión; = indica un rendimiento equiparable.

Este informe se ha reproducido con la autorización por escrito de Keypoint Intelligence.

Está prohibida la reproducción sin la autorización por escrito ©2025 Keypoint Intelligence - (012502)



La Canon imagePROGRAF TX-4200 demostró una ventaja clara en diferentes aspectos sobre la Epson SureColor SC-T7700D. Destacó especialmente en calidad de imagen, con unos textos y unas líneas siempre nítidos y limpios, una reproducción de fotografías con unos colores vivos, unas densidades ópticas superiores y unos volúmenes de gama de colores superiores independientemente del tipo de material. Ambos modelos crearon impresiones de alta calidad, que cumplirían fácilmente las expectativas de los clientes de los mercados de arquitectura, ingeniería y construcción (AEC) para la impresión de diseños asistidos por ordenador (CAD) y también de sistemas de información geográfica (GIS). Sin embargo, las impresiones GIS del modelo Canon destacaron especialmente, con unas llamativas etiquetas de texto rojo (gracias a la inclusión de una nueva tinta magenta) y unos colores más complejos y con un mejor contraste. Las pruebas de productividad demostraron la velocidad y la eficacia de la Canon TX-4200 al gestionar flujos de trabajo mixtos e imprimir con el dispositivo preparado para la impresión, con un procesamiento más rápido de los trabajos.

El equipo Epson también destacó en algunos aspectos, como una producción más rápida y unas velocidades de impresión de carteles A1 superiores en su modo de calidad máxima, así como una velocidad superior en la prueba de productividad de pancartas. Los dos modelos ofrecen potentes herramientas de envío directo de impresiones y un avanzado software y son compatibles con la impresión desde dispositivos móviles, lo que ofrece unos grandes niveles de productividad a los usuarios estén donde estén. Las características de los dispositivos son comparables, aunque el modelo TX-4200 sobresale por aspectos como los depósitos de tinta de cambio en caliente, el práctico seguimiento de materiales sin código de barras y la impresión sin márgenes en todos los materiales, lo que amplía sus posibilidades de uso y la flexibilidad en los flujos de trabajo. La Canon TX-4200 destaca además por su embalaje sostenible, sin espuma de poliestireno, lo que reduce los residuos. En cuanto a consumo de tinta, el modelo de Canon fue el más eficiente en dos de los tres escenarios de prueba.

Sumado a una calidad de imagen superior y a una elevada productividad, estas ventajas sitúan el modelo Canon TX-4200 como el ganador en nuestra evaluación.



Canon imagePROGRAF TX-4200 vs. Epson SureColor SC-T7700D

Image Quality

| Category | Canon imagePROGRAF TX-4200 | Epson SureColor SC-T7700D |
|--|-------------------------------|------------------------------|
| Text | ~ | |
| Fine Lines | ~ | |
| Halftone Range | = | = |
| Halftone Fill | = | = |
| Solid Density | ~ | |
| AEC Graphics | = | |
| GIS Graphics | ~ | |
| Colour Photographic Images | ~ | |
| Monochrome Photographic Images | = | = |
| Colour Gamut (Fast/Speed) | ~ | |
| Colour Gamut (Standard/Quality) | \checkmark | |
| Colour Gamut (High/Max Quality) | ~ | |
| Colour Gamut (Matte Coated Paper, High/Max Quality) | ~ | |

✓ denotes a model advantage; = denotes parity in performance. Image quality testing was conducted on Canon Standard Plain Paper 2 and Epson Universal Bond.

- The Canon TX-4200 outperformed in black and colour optical density on plain paper across all modes compared to the Epson SC-T7700D.
- On plain paper, the Canon TX-4200 consistently delivered a larger colour gamut compared to the Epson SC-T7700D. It achieved an 27.8% larger gamut volume in Fast/Speed mode (188,218 vs. 147,314), 102.5% larger gamut in Standard/Quality mode (306,909 vs. 151,558), and 90.5% larger gamut in High/Max Quality settings (326,245 vs. 171,234).
- On matte coated paper in highest quality settings, the Canon model delivered a 16.1% larger colour gamut than that of the Epson unit (401,614 vs. 345,879).
- The Canon TX-4200 consistently excelled in print quality tests across text, fine lines, circles, and grids. It produced clean, crisp text legible down to 3-pt. in all modes, with no bleed. The Epson SC-T7700D delivered legible 3-pt. text with slight ink bleed in all modes. Canon's fine lines and circles were slender and clean at 0.1-pt., while Epson's line art was less crisp owing to some slight bleed at the 0.1pt-level in Speed and Quality modes; in Max Quality, line art quality was clean and well defined. Canon delivered consistent,




well-formed 1x1 pixel grids in CMYK across all modes; Epson's grids were intact but showed inconsistent dot formation in Speed and Quality modes.

- Both devices performed well in producing smooth colour and greyscale halftones across the full range from the 10% to 100% dot-fill levels—in all modes with distinct transitions between all levels.
- AEC graphic prints from both devices showed excellent detail in all modes. Under magnification, Canon's output was dark and clean in Standard and High, while there was slight ink bleed visible in Fast mode. Epson's output was also bold across all modes.
- The Canon TX-4200 produced high quality GIS graphics in all modes, with better standout text in red, sharp detailing and excellent depth of field for realistic 3D topographical rendering. The Epson produced a high-quality GIS map in Quality mode with comparable detailing and bright colours but in Max Quality there was less contrast and colours were slightly pale.
- The Canon TX-4200's photographic images exhibited bright, punchy colours, very good detailing and contrast, and smooth tonal transitions. Metallics and jewellery in Fast mode lacked depth and appeared less 'premium' but improved in Standard and High modes. Skin tones were warm and natural looking, overall, with a slight magenta bias in High. The Epson SC-T7700D's output had less fine detail and muted colours in Quality and Max Quality modes (although colours were bright in Speed mode); skin tones were consistently pale and lacked contrast.
- Both models produced smooth greyscale images with neutral grey tones in Standard/Quality and High/ Max Quality modes. In Fast/Speed mode, the Canon delivered better contrast and detail, while the Epson appeared overly dark with some shadow detail loss. At higher quality levels, Canon's output was slightly too dark, reducing detail in darker areas, whereas Epson's images, though neutral, appeared pale and lacked depth.
- The Canon TX-4200's image quality was judged stronger overall, for its crisper text, cleaner fine lines, richer colours, more natural-looking skin tones, and larger colour gamuts. The Epson SC-T770D delivered high-quality technical output but on plain paper, text and line art suffered from slight ink bleed (under magnification) and it could not match the Canon's bright and vibrant colours and skin tones in photographic images.

This report has been reproduced with the written permission of Keypoint Intelligence.



Canon imagePROGRAF TX-4200 vs. Epson SureColor SC-T7700D

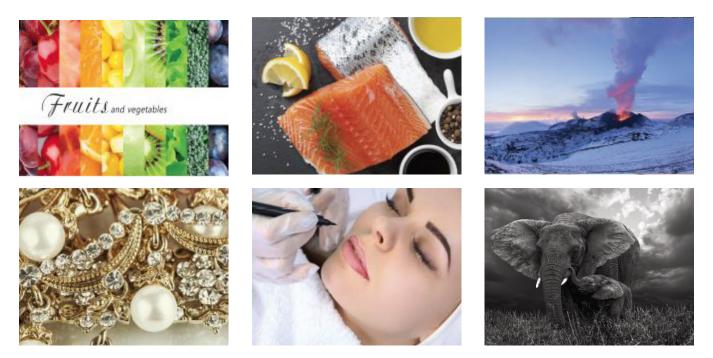

Keypoint Intelligence's Colour and Greyscale Halftone Test Targets

Print Productivity

| Category | Canon imagePROGRAF TX-4200 | Epson SureColor SC-T7700D |
|--|-------------------------------|------------------------------|
| First Page Out from Weekend Non-Use | ~ | |
| First Page Out from Ready State | ~ | |
| Throughput Speed (Fast/Speed) | ~ | |
| Throughput Speed (Standard/Quality) | ~ | |
| Throughput Speed (High/Max Quality) | | ~ |
| Job Stream | ~ | |
| Dual-Roll Job Stream | ~ | |
| A0 Throughput Speed (Standard/Quality) | | ✓ |

 \checkmark denotes a model advantage; = denotes parity in performance.

This report has been reproduced with the written permission of Keypoint Intelligence.



- After a weekend of non-use, the Canon TX-4200's first page out time was 15.6% faster than that of the Epson SC-T7700D (53.29 seconds versus 63.16 seconds). Start-up time before printing began was also faster at 30.99 seconds, compared with 39.26 seconds for the Epson unit.
- The Canon device had a 25.5% faster first-page-out time of 30.03 seconds from ready state, compared with 40.32 seconds for the Epson unit. Its start-up time before printing commenced was faster, too—9.38 seconds compared with 16.27 seconds for the Epson.
- In the job stream test, designed to simulate a typical mixed workflow for a large-format unit, the Canon TX-4200 was faster than the Epson SC-T7700D in all modes; it was 40.9% faster in Fast/Speed, 28.0% faster in Standard/Quality mode, and 5.4% faster High/Max Quality mode.
- As both models offer a dual-roll design, a further job stream test was conducted. This involved sending the same files as alternate jobs to different rolls so to test both models' efficiency when switching between rolls. The Canon TX-4200 was 33.4% faster than the Epson in Fast/Speed mode.
- In the 12-page colour DWF test, the Canon model was faster than the Epson unit in two modes tested; it was 29.5% faster in Fast/Speed mode, 3.6% faster in Standard/Quality mode, but 2.3% slower in High/ Max Quality mode.
- Similarly, when printing the 12-page DWF test file in monochrome, the Canon TX-4200 was 29.6% faster in Fast/Speed mode; 5.7% faster in Standard/Quality mode, but 3.0 slower in High/Max Quality mode than the Epson device.
- In the single-page A0-size test, the Canon delivered a first-page-out time of 87.12 seconds in Standard/ Quality, 7.3% faster than that of the Epson (94.00 seconds). It was, however, 3.7% slower to print five A0size pages (390.46 seconds versus 376.65 seconds for the Epson).

Banner Printing

| Category | Canon imagePROGRAF TX-4200 | Epson SureColor SC-T7700D |
|---------------------------|-------------------------------|------------------------------|
| Image Quality | = | = |
| Productivity (Fast/Speed) | | ✓ |

 \checkmark denotes a model advantage; = denotes parity in performance.

- The Canon TX-4200 took 32.05 seconds to generate a preview at the desktop, with an additional print time of 3:38.95 from preview to final paper cut. In contrast, the Epson SC-T7700D took 1:13.84 to create a preview, and a further 1:51.90 to complete the process.
- As the models' output exhibited minimal banding, the banner was printed again with unidirectional feature enabled. The Canon model printed the banner in a similar time of 3:40.79, while the Epson took 2:02.00.

This report has been reproduced with the written permission of Keypoint Intelligence.



Canon imagePROGRAF TX-4200 vs. Epson SureColor SC-T7700D



Keypoint Intelligence's 106" x 36" Banner Test Target (4,955-KB PDF)

Poster Printing

| Category | Canon imagePROGRAF TX-4200 | Epson SureColor SC-T7700D |
|---------------------------------|-------------------------------|------------------------------|
| Image Quality | = | = |
| Productivity (Fast/Speed) | ~ | |
| Productivity (Standard/Quality) | ~ | |
| Productivity (High/Max Quality) | | ~ |

✓ denotes a model advantage; = denotes parity in performance.

- When printing the A1-sized Poster test target in Fast/Speed mode at 300 dpi, the Canon TX-4200 took 32.98 seconds to complete the job, while the Epson SC-T7700D took 38.42 seconds.
- Banding was evident on both models' output printed in Fast/Speed mode. When unidirectional printing was selected in the Canon driver, banding was largely eliminated with a print time of 42.56 seconds. On the Epson, minimal banding was still visible, and it took 43.79 seconds when operating in unidirectional mode.
- The Canon model took 45.04 seconds to print the poster in Standard mode at 600 dpi, while the Epson took 51.32 seconds in Quality mode.
- When printing the poster in High/Max Quality mode, the Canon model completed the job in a time of 1:35.76, slightly slower than that of the Epson unit (1:16.85).
- At the higher quality modes, there was no observable banding on output from both models.

This report has been reproduced with the written permission of Keypoint Intelligence.



Canon imagePROGRAF TX-4200 vs. Epson SureColor SC-T7700D



Keypoint Intelligence's A1 Poster Test Target

Direct Print Submission

| Category | Canon imagePROGRAF TX-4200 | Epson SureColor SC-T7700D |
|-------------------------|-------------------------------|------------------------------|
| Direct Print Submission | = | = |
| Mobile App Integration | = | = |


✓ denotes a model advantage; = denotes parity in performance.

- Canon's Direct Print Plus, powered by a proprietary PDF engine, simplifies PDF file processing and printing with its intuitive interface. The Job Preparation tab, which serves as the home screen, provides quick access to job settings, previews, and printer status information, removing the need to rely on the Status Monitor. Bidirectional communication with the printer minimizes the risk of media mismatches, while built-in cloud integration lets users access files directly from services like Dropbox, OneDrive, Google Drive, and Box for added convenience.
- Direct Print Plus supports direct printing of PDF, JPEG, TIFF, and HPGL/2 files without requiring native applications or print drivers. Users can reprint jobs with the same settings as the original print, and the Job Progress tab provides real-time visibility into the number of pages printed, improving operator oversight. Additionally, the utility links with Canon Accounting Manager to help users track project costs efficiently.
- Shortcut Print functionality allows users to create customizable desktop shortcuts. These shortcuts enable drag-and-drop file printing with predefined settings, mimicking a hot folder workflow. Multiple shortcuts can be created, each tailored to specific workflows, making repetitive tasks faster and more consistent.

This report has been reproduced with the written permission of Keypoint Intelligence.



Canon imagePROGRAF TX-4200 vs. Epson SureColor SC-T7700D

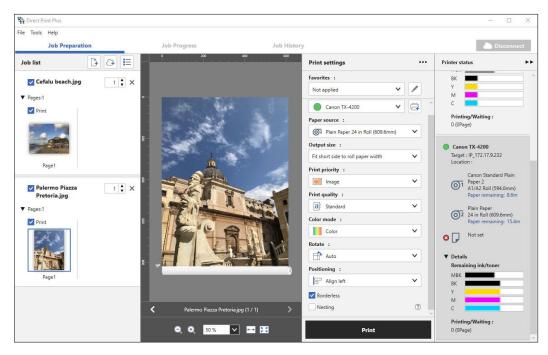

Canon Direct Print Plus


• Epson Print Automate enables users to print a PDF, JPEG, or TIFF file using shortcuts, without opening applications. It enables users to set individual options such as print size, rotation, print quality and number of copies before printing, with the ability to save job settings as presets.

| Menu | nt Automate Preset | Current Settings | S | • | | Print Settings | Details |
|----------------|-----------------------|----------------------|-------|------------------------|--|----------------|---------|
| Methoda | 50802.JPG | 26 | · · · | Color Select Target | Roll 1 44 in (111 1 iiiiiiiiiiiiiiiiiiiiiiiiiiiiiiii | Paper Width (| * |
| (+) | m | 2 files v 2 pages | | 0 pages 0 pages | | Print | |

Epson Print Automate



• Epson users can download Epson Print Layout, a free utility, from the vendor's website which enables the direct printing of JPEG and TIFF files. Users can preview print layouts, view thumbnail images of multiple print jobs, and select colour management and print settings directly within the utility. Users can also save job settings as presets (more than 100 presets can be saved) for easy repeat work.

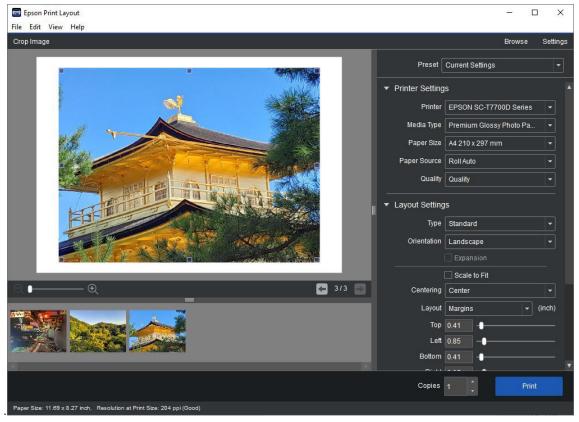



Epson Print Layout

- Both Canon PRINT and Epson Smart Panel mobile print apps enable wirelessly printing to compatible largeformat printers on the same WiFi network. With clean interfaces, extensive print settings, and integration with cloud storage services, both apps streamline mobile printing. Canon Android users will need to use Canon Print Service app to print from their smart devices; the Epson Smart Panel app is compatible with iOS and Android platforms.
- Both models support mobile printing via AirPrint for added convenience.



Canon imagePROGRAF TX-4200 vs. Epson SureColor SC-T7700D

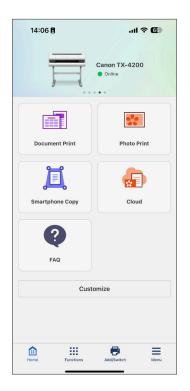

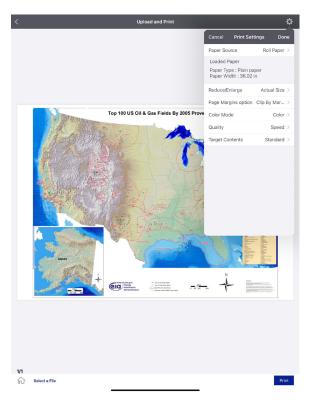

Canon PRINT Mobile Print App

Epson Smart Panel Print App

Ink Consumption

Keypoint Intelligence technicians noted that the inherent variability of inkjet technology—such as unpredictable head flushing and calibration routines—can lead to differing test results at different times. While every effort is made to ensure fair and consistent testing, the results should be seen as indicative of likely performance rather than a precise prediction of actual ink consumption in real-world conditions.

Overall Weight of Ink Used (in Grams)

| Document Type | Canon imagePROGRAF TX-4200 | Epson SureColor SC-T7700D |
|----------------------------|-------------------------------|------------------------------|
| Cottage Architectural Plan | 42.1 | 35.7 |
| ISO Office Poster | 85.2 | 149.1 |
| GIS Map | 81.4 | 83.0 |


✓ denotes a model advantage; = denotes parity in performance.

Results are averaged across three sets of 50-page A0 printing in Standard/Quality mode.

• The Canon TX-4200 device used 17.9% more ink than the Epson SC-T7700D when printing a Cottage Architectural Plan test target on plain media. This translates to the Canon device using 1.1% of its total available ink, while the Epson used 1.5%.



- In the ISO Poster test conducted on matte coated media, the Canon unit used 42.9% less ink compared with the Epson device. In this print scenario, it used 2.3% of its total available ink, while the Epson used 6.4%.
- In the GIS Map ink consumption test conducted on matte coated media, the Canon TX-4200 used 1.9% less ink compared with the Epson device; it used 2.2% of its total available ink, while the Epson model used 3.5%.

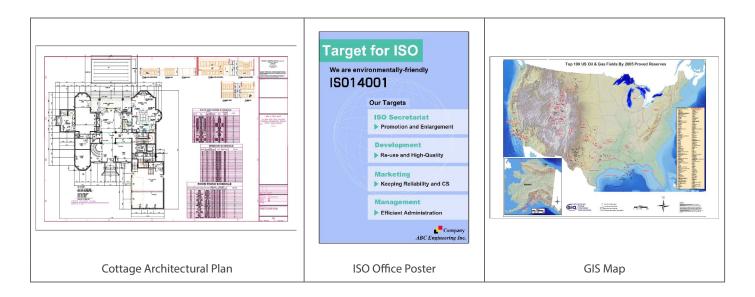

Device Feature Set

- The Canon TX-4200 cartridges can be replaced during operation, minimizing downtime, a feature not available with the Epson SC-T7700D. Both models support 700 ml-capacity cartridges for all colours.
- The Canon unit's ink delivery system dispenses a larger 5-picoliter drop size versus the Epson's 3.5-picoliter ink drop size.
- The Canon TX-4200 features a fast, user-friendly media loading process with a smart roll paper set function that automates feeding after securing the roll. A proximity sensor detects the paper edge and enables the printer to complete the loading process, with minimal user input. Built-in sensors identify paper characteristics like type and thickness, saving settings for future use, though first-time media use may require the operator to select the type on the control panel.
- The Epson SC-T7700D offers straightforward media loading process at the front of the device. After raising two spindle lock levers, the user can lift out the entire spindle, remove the media guide edge and slide the new media roll on before reinserting the spindle on the device. The printer will load the paper automatically; the operator must confirm the paper type on the control panel when using a brand-new media roll to complete the process.
- Both models offer a dual-roll design (optional with the Canon, standard on the Epson) for added convenience, allowing users to switch between media types or sizes without reloading. Both systems double as an auto Take-up Roll unit with bi-directional rewind, a useful feature for high-volume production, enabling multiple prints to be stored on a single roll.
- Both models support front media loading; optional stackers (if attached) must be removed for roll access.
- The Canon printer features dual sensors that measure, estimate, and display the remaining roll length on its touchscreen. This feature eliminates barcode printing and reading for partially used rolls, and alerts



operators if there's insufficient media to complete a job, reducing the risk of unexpected runouts. Epson users can enable paper tracking capabilities which allows a remaining media information barcode to be printed on a partially used roll's edge before its removal from the device.

- The Canon TX-4200 supports borderless printing regardless of what media is being used, with a media sensor detecting the edges and automatically adjusting the margin, so there is no ink waste; users can choose free size or three-sided borderless. The Epson SC-T7700D supports borderless printing as well with select media and common media widths.
- The Epson unit supports a higher maximum printable paper roll length of 91 m compared with 18 m (depending on OS and application) for the Canon unit.
- Both models come with a catch bin/basket to collect output from media rolls. Canon's catch basket can be arranged in different positions to suit the paper size and quantity being produced, and whether the roll unit is employed.
- The Canon TX-4200 supports a high-capacity stacker capable of collating up to 100 A0- or A1-sized CAD prints. Mixed size prints cannot be accommodated. It easy to attach by wheeling it into place but operators must remove the stacker assembly to access the front-loading roll mechanism. A production stacker option is available with the Epson model.
- Both devices behave in a similar way when they run out of paper during a print job; they will pause and alert the operator, resuming printing from the start of the interrupted page after a new roll is installed. This approach minimizes ink and paper waste.
- The Canon TX-4200 automatically places jobs requiring unavailable media on hold while continuing to print other compatible jobs. Once the correct media is loaded, the held jobs are printed. Epson users will see a driver alert next to the media selection when an incompatible media type is chosen. On attempting to print, a pop-up window further warns the user about the mismatch, enabling them to cancel the job or proceed with printing.
- PRISMAproduce Tech is an application for production environments, allowing users to manage and submit jobs from a browser to multiple printers. Canon users can also standardize print results using templates.
- Canon's Device Management Console allows users to check the status of the TX-4200 when connected to a network or USB as well as conduct colour calibration routines. Cloud-based Epson Edge Dashboard enables Epson users to monitor and view device and consumable status for all networked SureColor devices. It also offers error conditions and allows printhead cleaning and maintenance routines to be performed remotely from the utility.
- The Canon device utilizes 2 GB of physical RAM and includes a built-in 500 GB encrypted hard drive for secure document storage and improved spooling workflow. The Epson model employs 4 GB of RAM and has an optional 1-TB SSD hard drive.
- The Canon model is lighter, with a net weight of 112 kg compared to the Epson's 155 kg; it has slightly higher active power consumption at 87 watts versus the Epson's 70 watts.
- The Canon TX-4200 does not feature any polystyrene foam in its packaging, minimizing waste, whereas the Epson unit's packaging utilizes it.

This report has been reproduced with the written permission of Keypoint Intelligence.



Canon imagePROGRAF TX-4200 vs. Epson SureColor SC-T7700D



The Canon TX-4200's packaging contains no polystyrene.



The Epson SureColor SC-T7700D's packaging with polystyrene.

Driver Feature Set

- Both models offer a variety of speed settings and an intuitive overview of selected job settings; the Canon driver offers more media profiles while the Epson features more predefined print profiles.
- Canon's Media Configuration Tool allows for new custom media types to be registered based on custom media information added to the printer, and users can also organize media shown on the control panel or driver, rename and show/hide information. The Epson Media Installer utility (which can be linked via the Utility tab in the printer driver) allows users to create and store additional custom media profiles for use when printing on third-party media or paper that's not supported in the printer driver.



- The Epson driver provides a handy thumbnail preview for users to check the effects on the image as they make colour adjustments in real-time, a feature not available in the Canon driver.
- Canon also provide an additional driver (Driver Select) for Canon Production Printing product users, who can program print settings in a single window following the output workflow from paper selection through layout to finishing.
- Canon offers a watermark capability (not available with the Epson drier), and a maximum 16-up printing with only 2-4 multi-up printing supported on the Epson. It offers a more limited 2x2 poster mode, with the Epson offering 4x4 posters.
- Both printers support unidirectional printing to help reduce and eliminate banding issues in print output. When 'High Speed' feature is disabled in the Epson driver, the printer switches unidirectional mode.
- The Canon driver, available in both 64-bit and 32-bit versions, includes the Color imageRUNNER Enlargement Copy Mode utility. This feature integrates a Canon small-format MFP with the TX-4200, allowing scanned documents to be automatically routed to a monitored hot folder, resized, and printed. This streamlined tool simplifies poster creation for office users.
- The Canon model includes a Microsoft Office plug-in that provides features such as automatic media resizing, nesting, and borderless printing. Epson offers similar free software, LFP Print Plug-in for Office, which adds a 'ribbon' to the Microsoft Office application menu. It offers buttons for fast printing and for printing non-standard size banners in Word, PowerPoint, and Excel (the latter without the banner printing).
- Canon's Accounting Manager, accessible through the Status Monitor, provides detailed accounting for all print jobs. Users can input ink and media costs to automatically calculate and display job costs, along with media type, print area, ink usage, and total print time. Detailed reports can be generated by selecting individual or multiple jobs, with data exportable in .CSV format for use in Excel. Epson offers the free LFP Accounting Tool which automates accounting for SureColor users. In addition to tracking the costs of ink and media, the utility can track ancillary costs such as lamination, labour, and transportation.

| Canon Accounting Manager ile View Tools Help | | | | | | | | | <u></u> | |
|---|---------|-------------------------------|------------------|------------------|----------------|-----|---------------|--------------------|-------------------|-------------|
| 🗟 🖬 🖷 C ? | | | | | | | | | | |
| Move Page: | 1/1 | $ \rightarrow \rightarrow $ | | | | | | | | |
| Job Cost Displayed | Cost [] | Printer Accou | Document Name | Printing Results | Media Type | Pri | Paper Consume | Paper Width [cm] | Paper Height [cm] | Ink Consume |
| TX-4200 | *** | TX-4200 | RGB 線幅 色 | Canceled | Canon Glossy P | Cu | 0.0000 | 0.000 | 0.000 | 0.000 |
| TX-3200 | *** | TX-4200 | RGB 線幅 色 | Canceled | Canon Glossy P | | 10.000 | 0.000 | 0.000 | 0.000 |
| Job Cost Hidden | *** | TX-4200 | RGB 線幅 色 | Complete | Canon Glossy P | Cu | 0.2741 | 91,440 | 29,980 | 1.288 |
| TX-4100 | *** | TX-4200 | RGB 線幅 色 | Complete | Canon Glossy P | | | 91.440 | 29.980 | 1.288 |
| TX-3100 | *** | TX-4200 | テストページ | Complete | Canon WaterR | A4 | 0.2714 | 91.440 | 29,690 | 0.063 |
| | *** | TX-4200 | FloorPLAN_A1.pdf | Complete | Plain Paper | A1 | 0.5430 | 91.440 | 59.390 | 0.223 |
| | *** | TX-4200 | FloorPLAN A1.pdf | Complete | Plain Paper | A1 | 0.5430 | 91.440 | 59.390 | 0.313 |
| | *** | TX-4200 | Test Page | Complete | Plain Paper | Le | 0.1703 | 60,960 | 27,940 | 0.039 |
| | *** | TX-4200 | NEW BLI IMAGE | Complete | Canon Standar | A4 | 0.1246 | 59.400 | 20.990 | 0.178 |
| | *** | TX-3200 | RGB 線幅 色 | Complete | Canon Glossy P | Cu | 0.2741 | 91.440 | 29,980 | 1.288 |
| | 888 | TX-3200 | RGB 線幅 色 | Complete | Canon Glossy P | Cu | 0.2741 | 91.440 | 29,980 | 1.288 |
| | *** | TX-3200 | Test Page | Complete | Plain Paper | Le | 0.2554 | 91.440 | 27.940 | 0.039 |
| | *** | TX-3200 | FloorPLAN A1 | Complete | Plain Paper | Cu | 0.5429 | 91.440 | 59.380 | 0.189 |
| | *** | TX-3200 | FloorPLAN_A1 | Complete | Plain Paper | Cu | 0.5429 | 91.440 | 59.380 | 0.270 |
| | *** | TX-3200 | FloorPLAN A0 | Complete | Plain Paper | Cu | 1.0870 | 91.440 | 118.880 | 0.191 |
| | *** | TX-3200 | FloorPLAN_A1 | Complete | Plain Paper | Cu | 0.5429 | 91.440 | 59.380 | 0.113 |
| | *** | TX-3200 | FloorPLAN_A1 | Complete | Plain Paper | Cu | 0.5429 | 91.440 | 59.380 | 0.113 |
| | 888 | TX-3200 | FloorPLAN A1 | Complete | Plain Paper | Cu | 0.5429 | 91.440 | 59.380 | 0.113 |
| | *** | TX-3200 | FloorPLAN_A0 | Complete | Plain Paper | Cu | 1.0870 | 91.440 | 118.880 | 0.191 |
| | *** | TX-3200 | FloorPLAN_A0 | Complete | Plain Paper | Cu | 1.0870 | 91.440 | 118.880 | 0.191 |
| | *** | TX-3200 | FloorPLAN_A0 | Complete | Plain Paper | Cu | 1.0870 | 91.440 | 118.880 | 0.191 |
| | *** | TX-3200 | FloorPLAN_A0 | Complete | Plain Paper | Cu | 1.0870 | 91.440 | 118.880 | 0.191 |
| | *** | TX-3200 | FloorPLAN_A0 | Complete | Plain Paper | Cu | 1.0870 | 91.440 | 118.880 | 0.191 |
| | *** | TX-3200 | FloorPLAN_A1 | Complete | Plain Paper | Cu | 0.5429 | 91.440 | 59.380 | 0.270 |
| arget Period: Il Periods | | | | | | | | | | |
| Filter Job Logs | | | | | | | | | | |
| A | < | | | | | | | | | |
| | | | | | Job(s): 0/24 | | Date | of Last Update: 20 | 24/11/27 12:28:58 | |

Canon Accounting Manager

This report has been reproduced with the written permission of Keypoint Intelligence.






Canon imagePROGRAF TX-4200 vs. Epson SureColor SC-T7700D

| Job Information List | | | | | | | | |
|----------------------------|------------------------|---------------------------|-------------------|---------------------|--------------------|--------------|--------------|-------------------|
| Some of the jobs do not | t contain cost setti | ngs. | | E | PSON SC-T7 | 700D Series | | 14 MIL - 1200 |
| | | | | S | N:X8U80018 | 350 | Va | IN |
| Accumulated Media Usa | age 155 m ² | Accum | nulated Ink Usage | 205 ml Da | ata Acquisition | 05/12/202 | 4 14:08:24 | |
| Printer EPSON SC-T7700D | Series S/N:X8U8001850 | ~ | Add Printer | Price Set | tings Prefe | rences | Refresh Data | |
| Period V | Starting Month 1 | ✓ Sta | arting Day 1 | ~ | Jobs to display 50 |) ~ | Search | Filter Settings |
| eriod | | | | | | | | |
| | Job Name | Total Cost | Media Type | Media Usage | Ink Usage | Completion | User Name | Job Status |
| | banner test fil | ??? | Plain Paper | 0.23 m ² | 0.69 ml | 05/12/2024 1 | martinsoane | Completed |
| | banner test fil | 222 | Plain Paper | 2.44 m ² | 22.25 ml | 05/12/2024 1 | martinsoane | Completed |
| | C:\Users\ukte | 222 | Plain Paper | 0.56 m ² | 0.35 ml | 04/12/2024 1 | uktes | Completed |
| | Sale Poster.j | 222 | Plain Paper | 0.54 m ² | 1.45 ml | 04/12/2024 1 | uktes | Completed |
| | Sale Poster.j | 222 | Plain Paper | 0.54 m ² | 1.59 ml | 04/12/2024 1 | uktes | Completed |
| | Sale Poster.j | 222 | Plain Paper | 0.54 m ² | 1.35 ml | 04/12/2024 1 | uktes | Completed |
| | Sale Poster.j | 222 | Plain Paper | 0.54 m ² | 1.36 ml | 04/12/2024 1 | uktes | Completed |
| | Sale Poster.j | 222 | Plain Paper | 0.56 m ² | 1.63 ml | 04/12/2024 1 | uktes | Completed |
| | Sale Poster.j | ??? | Plain Paper | 0.56 m ² | 1.68 ml | 04/12/2024 1 | uktes | Completed |
| | Sale Poster.j | ??? | Plain Paper | 0.56 m ² | 1.22 ml | 04/12/2024 1 | uktes | Completed |
| | | | | Previous 1/ | 1 Next | | | Help |
| Summary of Selected Period | J. | | | 241 | | | | |
| Total Jobs | 10 | | | | Selected I | | | Detailed Job Info |
| Total Ink | 33.57 ml ?? | ? | | | | | to CSV | Jetalled Job Into |

Epson LFP Accounting Tool

• Canon's Free Layout plus software allows users to scale, resize, and group files from different applications into a single job directly from the printer driver. With drag-and-drop functionality, images can be precisely positioned on a single page, reducing paper waste.

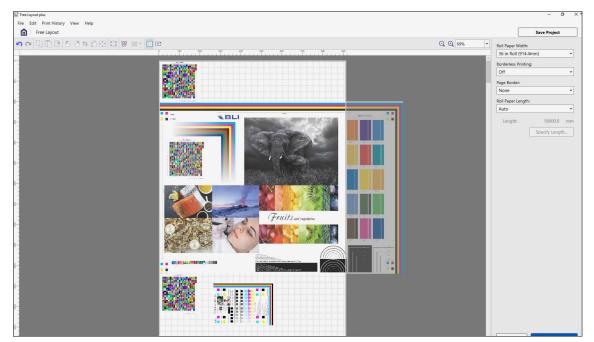


Canon's Free Layout plus

This report has been reproduced with the written permission of Keypoint Intelligence.



- Canon's web-based PosterArtist is a user-friendly tool for creating posters and signage. It provides access to stock photo services like Pixabay, Pexels, and Unsplash, and a wide selection of royalty-free images. The software also offers a variety of pictographic icons and templates sorted by type and event, and supports multi-language poster creation with 900 common expressions across 10 languages.
- Within PosterArtist, users can use Free Layout plus tool enables efficient media use by allowing custom arrangement of files and correct double-sided printing orientation for when folding is required. Epson's Print Layout utility offers resizing options and combines multiple documents for single-layout printing.

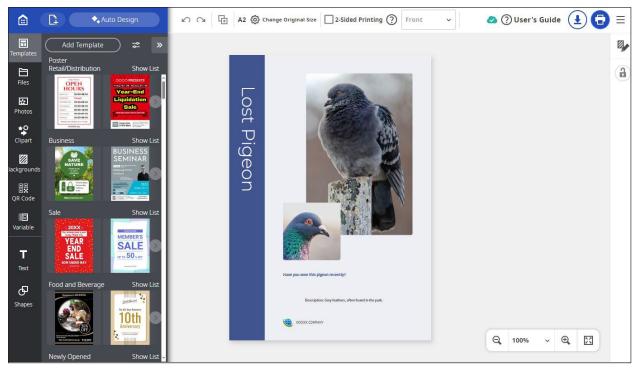

Canon PosterArtist Web



SUPPORTING TEST DATA

Print Productivity

Job Stream (in Seconds)

| | non RAF TX-4200 | Epson SureColor SC-T7700D | | | |
|----------|--------------------|------------------------------|----------|--|--|
| Fast | 478.82 | Speed | 810.75 | | |
| Standard | 797.81 | Quality | 1,108.00 | | |
| High | 1,552.18 | Max Quality | 1,640.66 | | |

Keypoint Intelligence's job stream consists of nine files, including PDF, TIFF, and DWF files, for a total of 19 pages, all at Arch D-size, ensuring that the files are set to fit to page. This test replicates the type of traffic a typical wideformat device might experience in a real-world, multi-user environment. All files are submitted to the controller in a specific order and sent to the printer as a group, at which time the stopwatch begins; timing ends when the last page of the last file exits the device. Both devices were loaded with 914 mm rolls, with each file set to auto-rotate to save media.

Job Stream, Dual Roll (in Seconds)

| | non RAF TX-4200 | Epson SureColor SC-T7700D | | |
|------|--------------------|------------------------------|----------|--|
| Fast | 775.00 | Speed | 1,163.26 | |

Keypoint Intelligence's dual-roll job stream consists of nine files, including PDF, TIFF and DWF files, for a total of 19 pages, all at Arch D-size, ensuring that the files are set to fit to page. This test replicates the type of traffic a typical wide-format device might experience in a real-world, multi-user environment. All files are submitted to the controller in a specific order and sent to the printer as a group, sending alternate jobs to different rolls, at which time the stopwatch begins; timing ends when the last page of the last file exits the device. Both devices were loaded with 914 mm rolls.

Colour Output (in Seconds)

| | non RAF TX-4200 | Epson SureColor SC-T7700D | | |
|----------|--------------------|------------------------------|--------|--|
| Fast | 284.87 | Speed | 404.10 | |
| Standard | 529.82 | Quality | 549.86 | |
| High | 946.13 | Max Quality | 925.17 | |

The 12-page DWF test file was printed using the device driver set to the plain paper/colour setting. Both devices were loaded with 914-mm rolls. The actual time indicated is the time it took to RIP, image, and deliver all pages of the test document to the collection bin.

This report has been reproduced with the written permission of Keypoint Intelligence.



Canon imagePROGRAF TX-4200 vs. Epson SureColor SC-T7700D

Monochrome Output (in Seconds)

| | non RAF TX-4200 | Epson SureColor SC-T7700D | | |
|----------|--------------------|------------------------------|--------|--|
| Fast | 284.49 | Speed | 404.07 | |
| Standard | 517.63 | Quality | 548.95 | |
| High | 938.40 | Max Quality | 911.47 | |

The 12-page DWF test file was printed with the Canon driver set to the plain paper/monochrome setting and the Epson driver set to plain paper, black mode. Both devices were loaded with 914-mm rolls. The actual time indicated is the time it took to RIP, image, and deliver all pages of the test document to the collection bin.

First-Page-Out Time After Weekend Non-Use (in Seconds)

| | Canon imagePROGRAF TX-4200 | Epson SureColor SC-T7700D |
|--------------------------------|-------------------------------|------------------------------|
| Time Before Printing Commences | 30.99 | 39.26 |
| First Page Out | 53.29 | 63.16 |

First-page-out time was measured by printing an Arch D-size PDF in Speed mode, timed from job release to page out. The Canon driver was set to plain paper/monochrome, the Epson driver to plain paper/black mode, with both devices loaded with 914-mm rolls.

First-Page-Out Time from Ready State (in Seconds)

| | Canon imagePROGRAF TX-4200 | Epson SureColor SC-T7700D |
|--------------------------------|-------------------------------|------------------------------|
| Time Before Printing Commences | 9.38 | 16.27 |
| First Page Out | 30.03 | 40.32 |

First-page-out time was measured by printing an Arch D-size PDF in Speed mode, timed from job release to page out. The Canon driver was set to plain paper/monochrome, the Epson driver to plain paper/black mode, with both devices loaded with 914-mm rolls.

A0 First-Page-Out and Throughput Times (in Seconds)

| | Canon imagePROGRAF TX-4200 | Epson SureColor SC-T7700D |
|----------------|-------------------------------|------------------------------|
| First Page Out | 87.12 | 94.00 |
| Five Pages Out | 390.46 | 376.65 |

A single-page A0-size Cottage Architectural Plan DWG TrueView Drawing test file was printed with the device driver set to the plain paper/colour setting in Standard/Quality mode. The actual time indicated is the time it took to RIP, image, and deliver five pages of the test document to the collection bin.

This report has been reproduced with the written permission of Keypoint Intelligence.



Canon imagePROGRAF TX-4200 vs. Epson SureColor SC-T7700D

Colour Print Quality

| Colour | C | Optical Density | | | | Evaluation | | |
|---------|----------------------------|-----------------|------|------|------|------------|--|--|
| | Canon imagePROGRAF TX-4200 | | | | | | | |
| | Fast Standard High | | | | | | | |
| | 50% | 50% 100% | | 100% | 50% | 100% | | |
| Cyan | 0.50 | 1.05 | 0.57 | 1.30 | 0.58 | 1.33 | | |
| Magenta | 0.49 | 1.04 | 0.58 | 1.35 | 0.59 | 1.37 | | |
| Yellow | 0.34 | 0.90 | 0.53 | 1.04 | 0.53 | 1.07 | | |
| Black | 0.47 | 1.54 | 0.65 | 1.52 | 0.67 | 1.52 | | |

| Epson SureColor SC-T7700D | | | | | | | |
|---------------------------|-----------|------|-----------|------|-------------|------|--|
| | Spe | eed | Quality | | Max Quality | | |
| | 50% 100% | | 50% | 100% | 50% | 100% | |
| Cyan | 0.45 0.86 | | 0.43 0.90 | | 0.45 | 0.84 | |
| Magenta | 0.32 | 0.80 | 0.33 | 0.86 | 0.35 | 0.88 | |
| Yellow | 0.45 | 0.71 | 0.46 | 0.77 | 0.52 | 0.86 | |
| Black | 0.59 | 1.06 | 0.62 | 1.22 | 0.64 | 1.34 | |

Colour density was measured by printing a Keypoint Intelligence proprietary PDF test target on plain paper using default colour settings across all quality modes. Density readings for 100% and 50% dot fills were taken with an XRite 508 and XRite exact^{xp} densitometer.

Colour Gamut Cubic L*a*b* Unit Volume Comparisons


| Media Type/Settings | Canon imagePROGRAF TX-4200 | Epson SureColor SC-T7700D | | |
|-------------------------------|----------------------------|---------------------------|--|--|
| Plain Paper Fast/Speed | 188,218 | 147,314 | | |
| Plain Paper Standard/Quality | 306,909 | 151,558 | | |
| Plain Paper High/Max Quality | 326,245 | 171,234 | | |
| Matte Coated High/Max Quality | 401,614 | 345,879 | | |

This report has been reproduced with the written permission of Keypoint Intelligence.


KEYPOINT INTELLIGENCE

Comparative Wide Format Evaluation:

Canon imagePROGRAF TX-4200 vs. Epson SureColor SC-T7700D




Canon imagePROGRAF TX-4200 colour gamut on plain paper in Fast settings (shown chromatically) vs. Epson SureColor SC-T7700D colour gamut (shown in red) on plain paper in Speed settings.

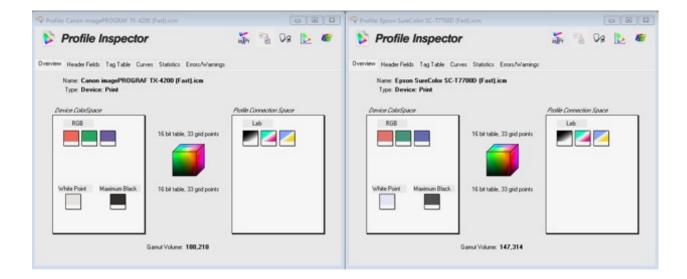

Colour gamut profile for Canon imagePROGRAF TX-4200 (left) and Epson SureColor SC-T7700D (right) on plain paper in Fast/Speed mode.


Any duplication without the written permission is prohibited @2025 Keypoint Intelligence – (012502)

Canon imagePROGRAF TX-4200 vs. Epson SureColor SC-T7700D

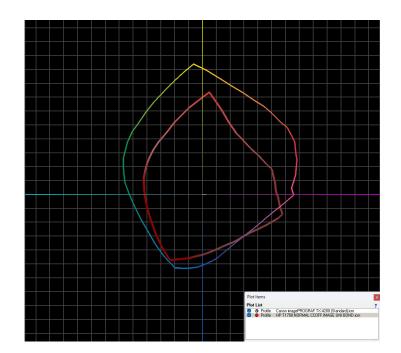

KEYPOINT INTELLIGENCE

Canon imagePROGRAF TX-4200 colour gamut on plain paper in Standard settings (shown chromatically) vs. Epson SureColor SC-T7700D colour gamut (shown in red) on plain paper in Quality settings.

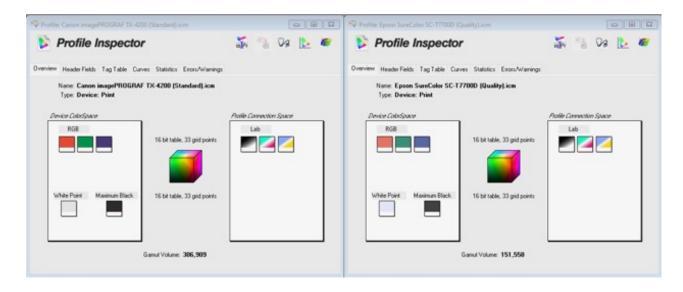


Colour gamut profile for Canon imagePROGRAF TX-4200 (left) and Epson SureColor SC-T7700D (right) on plain paper in Standard/Quality modes.




Canon imagePROGRAF TX-4200 vs. Epson SureColor SC-T7700D



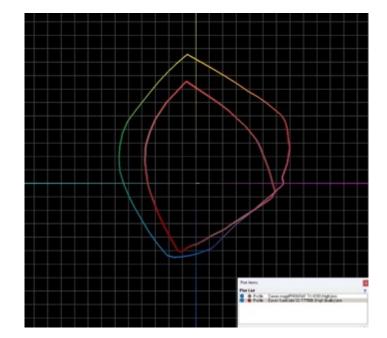


Canon imagePROGRAF TX-4200 colour gamut on plain paper in High settings (shown chromatically) vs. Epson SureColor SC-T7700D colour gamut (shown in red) on plain paper in Max Quality settings.

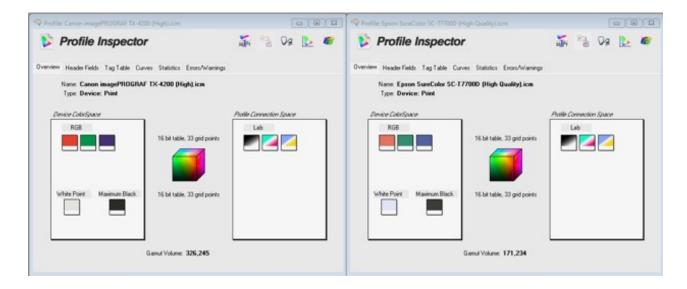


Colour gamut profile for Canon imagePROGRAF TX-4200 (left) and Epson SureColor SC-T7700D (right) on plain paper in High/Max Quality modes.

Canon imagePROGRAF TX-4200 vs. Epson SureColor SC-T7700D

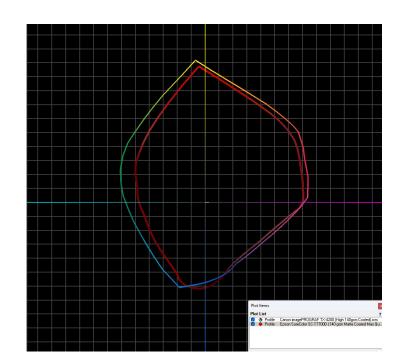

Canon imagePROGRAF TX-4200 colour gamut on matte coated paper in High quality settings (shown chromatically) vs. Epson SureColor SC-T7700D colour gamut (shown in red) on matte coated paper in Max Quality settings.

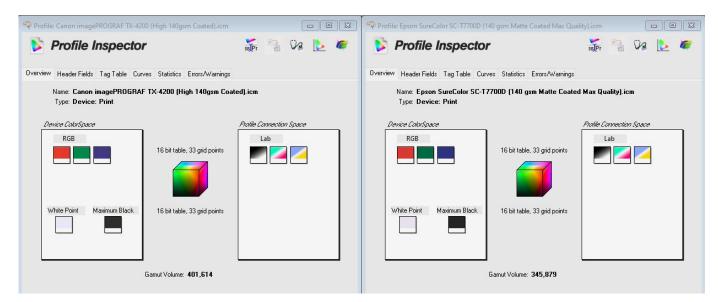

Colour gamut profile for Canon imagePROGRAF TX-4200 (left) and Epson SureColor SC-T7700D (right) on matte coated paper in High/Max Quality modes.



This report has been reproduced with the written permission of Keypoint Intelligence.



Canon imagePROGRAF TX-4200 vs. Epson SureColor SC-T7700D

Black Print Quality

Solid Density

| | Canon imagePROGRAF TX-4200 | | | Epson | SureColor SC-T | 7700D | | |
|---|----------------------------|----------|------|-------|----------------|-------------|--|--|
| | Density Block | | | | | | | |
| | Fast | Standard | High | Speed | Quality | Max Quality | | |
| 1 | 1.51 | 1.54 | 1.54 | 1.09 | 1.26 | 1.33 | | |
| 2 | 1.51 | 1.54 | 1.57 | 1.09 | 1.27 | 1.32 | | |
| 3 | 1.46 | 1.54 | 1.52 | 1.09 | 1.30 | 1.34 | | |
| 4 | 1.50 | 1.51 | 1.54 | 1.10 | 1.28 | 1.32 | | |

Solid black density measurements are based on four readings taken from a Keypoint Intelligence proprietary PDF test target file corresponding to four different 100% solid black locations on the output. The output was assessed at all quality settings available, with the Canon driver set to plain paper/monochrome setting and the Epson driver set to plain paper, black mode. Density was measured using an XRite 508 densitometer and XRite exact^{xp} densitometer.

Device Feature Set

| Category | Canon imagePROGRAF TX-4200 | Advantage 🗸 | | Epson SureColor SC-T7700D |
|---|---|-------------|---|--|
| Ink Tanks Replaceable During Operation | Yes | ~ | | No |
| Ink Drop Size | Minimum 5 picoliter | | ~ | 3.5 picoliter, with variable-sized droplet technology |
| Number of Nozzles | MBK: 5,120 nozzles; CMYK: 2,560 nozzles each; 15,360 in total | ~ | | 1,600 nozzles per colour; 9,600 in total |
| Line Accuracy | +/-0.1% | ~ | | +/-0.26% |
| Maximum Printable Paper Roll Length | 18 m (depending on OS and applica- tion) | | | 91 m |
| High-Capacity Stacker Assembly | Optional stacker offering three stack- ing configurations. Flatbed/folding position supports up to 100 A0 or A1 uncoated | | | Optional production stacker (capacity information not available) |
| Standard/Maximum RAM | 128 GB (2 GB physical) | | ~ | 4 GB |
| Net Weight (Unpacked) | 112 kg (including Roll Holder Set, excluding ink and printhead) | ~ | | 155 kg |
| Power Consumption (Active) | 87 W | | ~ | 70 W |

This report has been reproduced with the written permission of Keypoint Intelligence.



Canon imagePROGRAF TX-4200 vs. Epson SureColor SC-T7700D

Driver Feature Set

| Category | Canon imagePROGRAF TX-4200 | Advantage 🗸 | | Advantage 🗸 | | Epson SureColor SC-T7700D |
|-----------------------|---|----------------------|---|--|--|---------------------------|
| Predefined Profiles | Default, Photo (Color), Poster, CAD color line drawing, CAD mono line drawing, and Perspective, GIS | rr, CAD no line ✓ | | Standard; CAD/Line Drawing (Black, Color, Bi-Level); GIS (Black, Color); Poster/Document (Black, Color); Poster (Photo)/Perspective; Poster (Yellow Paper); ICM, Off (No Color Adjustment); Custom. A further 'Simple Settings' option is available. | | |
| Media Profiles | 50 + 10 user customizable special options | ~ | | 28 | | |
| Watermark | Yes | ~ | | No | | |
| Multi-Up Printing | Printing Yes (2 to 16) | | | Yes (2 to 4) | | |
| Poster Print Mode | Yes (2 by 2) | ~ | | Yes (4 by 4) | | |
| Saturation Adjustment | No | | ~ | Yes | | |

Ink Consumption

Canon imagePROGRAF TX-4200: Amount of Ink Used in Each Cartridge (in Grams)

| | Matte Black | Black | Yellow | Magenta | Cyan |
|--|-------------|-------|--------|---------|-------|
| Weight of Cartridge Prior to Installation | 957.5 | 942.5 | 937.0 | 958.0 | 941.0 |
| Weight of Cartridge at End of Life | 205.5 | 205.5 | 205.5 | 205.5 | 205.5 |
| Net Weight of Ink | 752.0 | 737.0 | 731.5 | 752.5 | 735.5 |
| Total Ink Weight Across Five Cartridges | | | | | |

Epson SureColor SC-T7700D: Amount of Ink Used in Each Cartridge (in Grams)

| | Photo Black | Matte Black | Yellow | Magenta | Cyan | Red |
|--|-------------|-------------|--------|---------|-------|---------|
| Weight of Cartridge Prior to Installation | 499.0 | 503.4 | 496.5 | 507.0 | 497.5 | 497.5 |
| Weight of Cartridge at End of Life | 109.7 | 109.7 | 109.7 | 109.7 | 109.7 | 109.7 |
| Net Weight of Ink | 389.3 | 393.7 | 386.8 | 397.3 | 387.8 | 387.8 |
| Total Ink Weight Across Six Cartridges | | | | | | 2,342.7 |

This report has been reproduced with the written permission of Keypoint Intelligence.



Canon imagePROGRAF TX-4200: Ink Used in Three 50-Page Runs of Cottage Architectural Plan Test Document in Standard Mode (in Grams)

| | Matte Black | Black | Yellow | Magenta | Cyan | |
|--|-------------|-------|--------|---------|------|--|
| Test Run 1: Net Weight of Ink Used | 23.5 | 3.5 | 3.0 | 5.5 | 6.5 | |
| Test Run 2: Net Weight of Ink Used | 25.0 | 3.0 | 3.0 | 5.5 | 6.0 | |
| Test Run 3: Net Weight of Ink Used | 23.5 | 3.5 | 3.5 | 6.0 | 6.0 | |
| Average Amount of Ink Used Across Three Runs | 24.0 | 3.3 | 3.1 | 5.6 | 6.1 | |
| Total Ink Weight Across Five Cartridges for 50-Page Run (based on average) | | | | | | |

Epson SureColor SC-T7700D: Ink Used in Three 50-Page Runs of Cottage Architectural Plan Test Document in Quality Mode (in Grams)

| | Photo Black | Matte Black | Yellow | Magenta | Cyan | Red |
|---|----------------|----------------|--------|---------|------|-----|
| Test Run 1: Net Weight of Ink Used | 1.5 | 15.4 | 2.0 | 5.5 | 9.5 | 1.5 |
| Test Run 2: Net Weight of Ink Used | 1.0 | 16.0 | 2.5 | 5.0 | 11.0 | 2.0 |
| Test Run 3: Net Weight of Ink Used | 1.0 | 15.0 | 2.0 | 5.1 | 10.0 | 2.0 |
| Average Amount of Ink Used Across Three Runs | 1.1 | 15.4 | 2.1 | 5.2 | 10.1 | 1.8 |
| Total Ink Weight Across Six Cartridges for 50-Page Run (based on average) | | | | | | |

Canon imagePROGRAF TX-4200: Ink Used in Three 50-Page Runs of ISO Poster Test Document in Standard Mode (in Grams)

| | Matte Black | Black | Yellow | Magenta | Cyan | |
|--|-------------|-------|--------|---------|------|--|
| Test Run 1: Net Weight of Ink Used | 24.5 | 3.5 | 3.5 | 21.5 | 32.0 | |
| Test Run 2: Net Weight of Ink Used | 25.0 | 3.5 | 4.0 | 21.0 | 31.3 | |
| Test Run 3: Net Weight of Ink Used | 25.0 | 4.0 | 4.5 | 21.0 | 32.0 | |
| Average Amount of Ink Used Across Three Runs | 24.8 | 3.6 | 4.0 | 21.1 | 31.7 | |
| Total Ink Weight Across Five Cartridges for 50-Page Run (based on average) | | | | | | |

This report has been reproduced with the written permission of Keypoint Intelligence.



Epson SureColor SC-T7700D: Ink Used in Three 50-Page Runs of ISO Poster Test Document in Quality Mode (in Grams)

| | Photo Black | Matte Black | Yellow | Magenta | Cyan | Red |
|---|----------------|----------------|--------|---------|------|------|
| Test Run 1: Net Weight of Ink Used | 8.5 | 21.0 | 12.5 | 30.5 | 66.4 | 11.5 |
| Test Run 2: Net Weight of Ink Used | 8.0 | 20.5 | 11.5 | 30.0 | 66.5 | 11.0 |
| Test Run 3: Net Weight of Ink Used | 7.8 | 22.3 | 12.0 | 30.5 | 66.5 | 11.0 |
| Average Amount of Ink Used Across Three Runs | 8.1 | 21.2 | 12.0 | 30.3 | 66.4 | 11.1 |
| Total Ink Weight Across Six Cartridges for 50-Page Run (based on average) | | | | | | |

Canon imagePROGRAF TX-4200: Ink Used in Three 50-Page Runs of GIS Map Test Document in Standard Mode (in Grams)

| | Matte Black | Black | Yellow | Magenta | Cyan | |
|--|-------------|-------|--------|---------|------|--|
| Test Run 1: Net Weight of Ink Used | 30.0 | 3.5 | 12.0 | 12.0 | 22.0 | |
| Test Run 2: Net Weight of Ink Used | 29.0 | 3.5 | 13.0 | 12.5 | 23.0 | |
| Test Run 3: Net Weight of Ink Used | 29.5 | 4.0 | 13.7 | 13.5 | 23.0 | |
| Average Amount of Ink Used Across Three Runs | 29.5 | 3.6 | 12.9 | 12.8 | 22.6 | |
| Total Ink Weight Across Five Cartridges for 50-Page Run (based on average) | | | | | | |

Epson SureColor SC-T7700D: Ink Used in Three 50-Page Runs of GIS Map Test Document in Quality Mode (in Grams)

| | Photo Black | Matte Black | Yellow | Magenta | Cyan | Red |
|---|----------------|----------------|--------|---------|------|------|
| Test Run 1: Net Weight of Ink Used | 1.6 | 26.0 | 12.5 | 11.5 | 19.0 | 11.5 |
| Test Run 2: Net Weight of Ink Used | 2.5 | 25.5 | 13.5 | 13.5 | 18.5 | 10.5 |
| Test Run 3: Net Weight of Ink Used | 2.0 | 25.0 | 13.5 | 12.5 | 19.0 | 11.5 |
| Average Amount of Ink Used Across Three Runs | 2.0 | 25.5 | 13.1 | 12.5 | 18.8 | 11.1 |
| Total Ink Weight Across Six Cartridges for 50-Page Run (based on average) | | | | | | 83.0 |

This report has been reproduced with the written permission of Keypoint Intelligence.



Test Methodology

Ink Consumption: Keypoint Intelligence analyzed ink consumption using three different document types: a Cottage Architectural Plan, an ISO Office Poster, and a GIS map. Each document was formatted as a PDF file except for the Cottage Architectural Plan which was formatted as a DWG TrueView Drawing, and all were sized at ISO A0.

In Keypoint Intelligence's lab, the Canon imagePROGRAF TX-4200, with the latest "1.04" firmware (as of November 2024) was connected to a Windows 10 workstation via a 1000BaseT TCP/IP connection and maintained in default configuration for testing. Using the Canon imagePROGRAF Printer Driver, the documents were set to print at actual size in Standard (600dpi) mode. The Cottage Architectural Plan was printed on plain paper with print priority settings set to Line Drawing/Text. The ISO Poster and the GIS map were both printed on 140 gsm matte coated media with print priority settings set to Image.

The Epson SureColor SC-T7700D was installed in Keypoint Intelligence's lab with the latest "Vxr02O8" level of firmware (as of November 2024) and connected to a Windows 10 workstation via a 1000BaseT TCP/IP connection and maintained in default configuration for testing. Using the EPSON GL/2 driver in default colour setting, the documents were set to print at actual size in Quality mode. The Cottage Architectural Plan was printed on plain paper; the ISO Poster and the GIS map were both printed on EPSON Heavy Weighted coated media.

Lab technicians weighed each ink cartridge before installation (with the weight of each ink with all packaging removed recorded) and after every 50-print test run, calculated the weight of ink used for each colour. To account for the Canon model's sub-tank, a procedure was followed to ensure that the sub-tank level was at its maximum before the print run commenced and again after the print run was completed, thereby ensuring that ink replenishment of the sub-tanks was considered for each print run. For both models, one cartridge was then run to exhaustion and the weight of the empty cartridge was recorded.

Test Environment: Products were tested in Keypoint Intelligence's environmentally controlled UK test lab, which replicates typical office conditions.

Test Equipment: Keypoint IIntelligence's dedicated test network in Europe, consisting of Windows 10 Professional workstations, 10/100/1000BaseTX network switches and CAT5e/6 cabling.

Test Procedures: Keypoint Intelligence employs proprietary procedures and industry-standard test procedures in its lab test methods. In addition to a number of proprietary test documents, Keypoint Intelligence uses industry-standard files including an ASTM monochrome test document for evaluating black image quality. Alongside a visual observation, colour print quality and gamut size are evaluated using XRite i1 profile software and an i1 Pro colour spectrophotometer and analysed using i1i0 Advanced Scanning Table. Density of black and colour output was measured using XRite 508 and XRite exact^{Xp} densitometers.

This report has been reproduced with the written permission of Keypoint Intelligence.



About Keypoint Intelligence

For over 60 years, clients in the digital imaging industry have relied on <u>Keypoint Intelligence</u> for independent handson testing, lab data, and extensive market research to drive their product and sales success. Keypoint Intelligence has been recognized as the industry's most trusted resource for unbiased information, analysis, and awards due to decades of analyst experience. Customers have harnessed this mission-critical knowledge for strategic decisionmaking, daily sales enablement, and operational excellence to improve business goals and increase bottom lines. With a central focus on clients, Keypoint Intelligence continues to evolve as the industry changes by expanding offerings and updating methods, while intimately understanding and serving manufacturers', channels', and their customers' transformation in the digital printing and imaging sector.

For more information, please call David Sweetnam at +44 (0) 118 977 2000 or email him at <u>david.sweetnam@keypointintelligence.com</u>

This report has been reproduced with the written permission of Keypoint Intelligence. Any duplication without the written permission is prohibited ©2025 Keypoint Intelligence - (012502)